



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	2/25/2009	

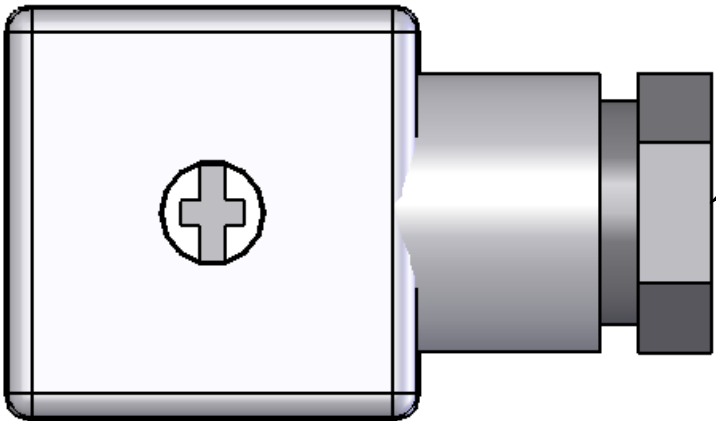


PG9 GLAND

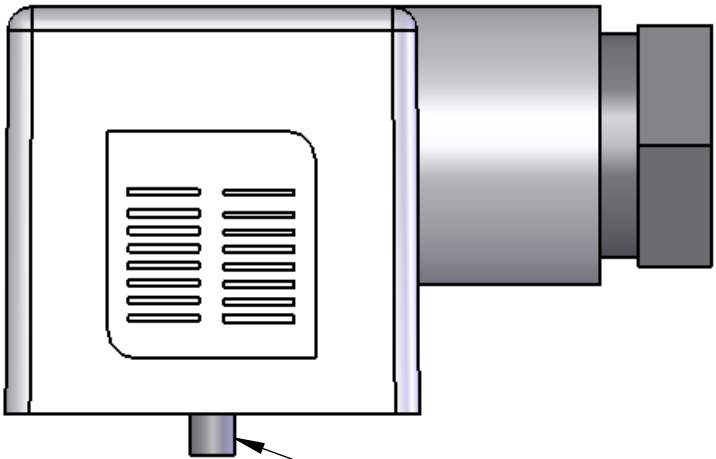


16
ACROSS FLATS

M3

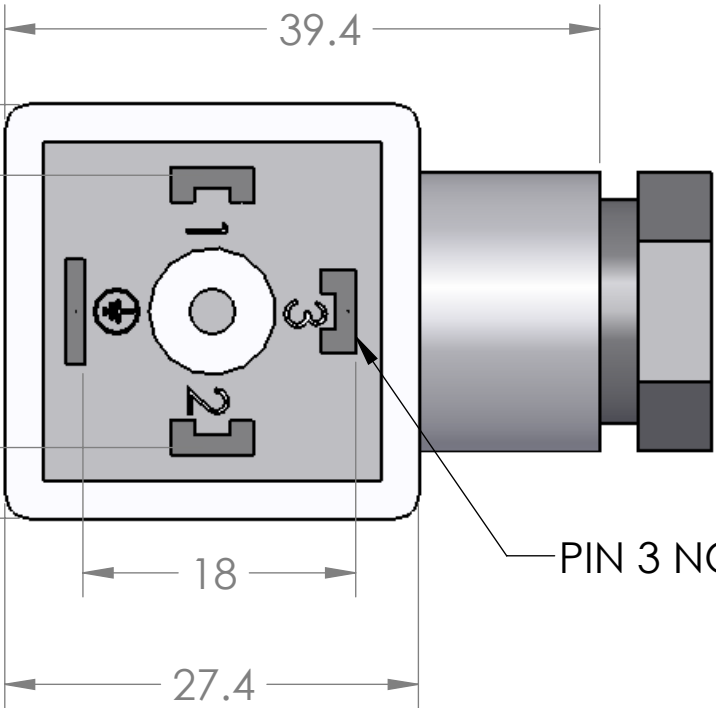

PIN 3 NOT USED

GASKET INCLUDED
BUT NOT SHOWN

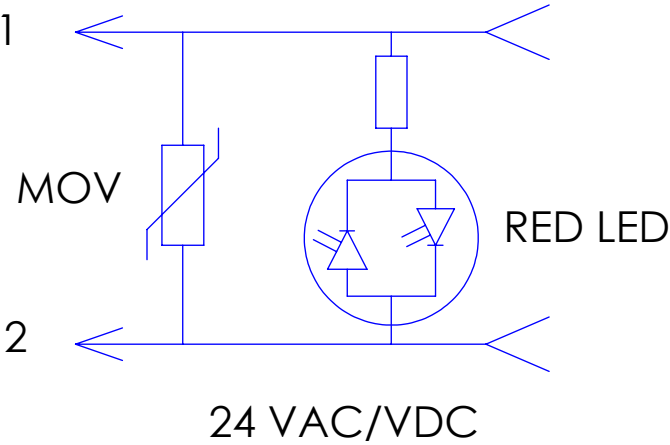

RATINGS:	
VOLTAGE:	24 VAC/VDC
AMPERAGE:	10A MAX
WIRE AWG:	18AWG MAX
CABLE DIA.:	6-8 mm
TEMPERATURE:	-40°C / +125°C

MATERIALS:	
BODY:	TRANSPARENT POLYAMIDE
INSERT:	30% G.F. POLYAMIDE
CONTACTS:	SILVER PLATED COPPER ALLOY
GROMMET:	THERMOPLASTIC RUBBER
GASKET:	THERMOPLASTIC RUBBER
SCREW:	CHROMATED STEEL

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	
DIMENSIONS ARE IN INCHES		DRAWN	BEM
TOLERANCES:		CHECKED	
FRACTIONAL $\pm 1/64$		ENG APPR.	
ANGULAR: MACH $\pm 5^\circ$ BEND $\pm 5^\circ$		MFG APPR.	
TWO PLACE DECIMAL $\pm .01$		Q.A.	
THREE PLACE DECIMAL $\pm .004$		COMMENTS:	
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

MENCOM CORPORATION		
TITLE:		
DIN FORM A WITH LED AND MOV		
SIZE	DWG. NO.	REV
B	VAG-029-00	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1