


► Model AD-26P

Atkinson Dynamics Panel Mount Intercoms

Heavy duty, tamper-resistant Panel-Mount Intercoms, designed for single-channel, two-way communications with integrated volume control, TALK/LISTEN switch, and robust brushed aluminum construction that includes a Neoprene™ gasket and stainless steel hardware. Accommodating the full range of Atkinson Dynamics speakers, the flush-mount units are available in 12VDC models.

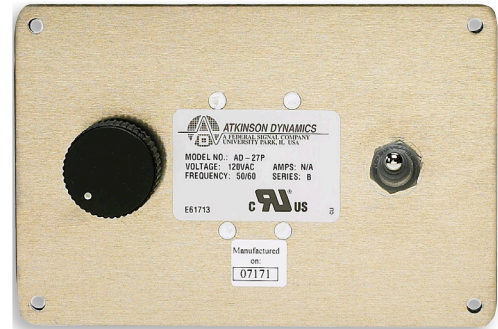


FEATURES

- Heavy duty tamper resistant intercom
- Single-channel, two-way communications
- Integrated volume control and Talk/Listen switch
- Requires a matching Atkinson Dynamics Speaker: AD-SF-25, AD-SS-25, and AD-SO-25
- Available in 12VDC
- UL and cUL Listed

MODEL	VOLTAGE	OPERATING CURRENT	STANDBY CURRENT
AD-26P	12VDC	1.47 A	100 mA

Atkinson Dynamics Panel Mount Intercoms (AD-26P)

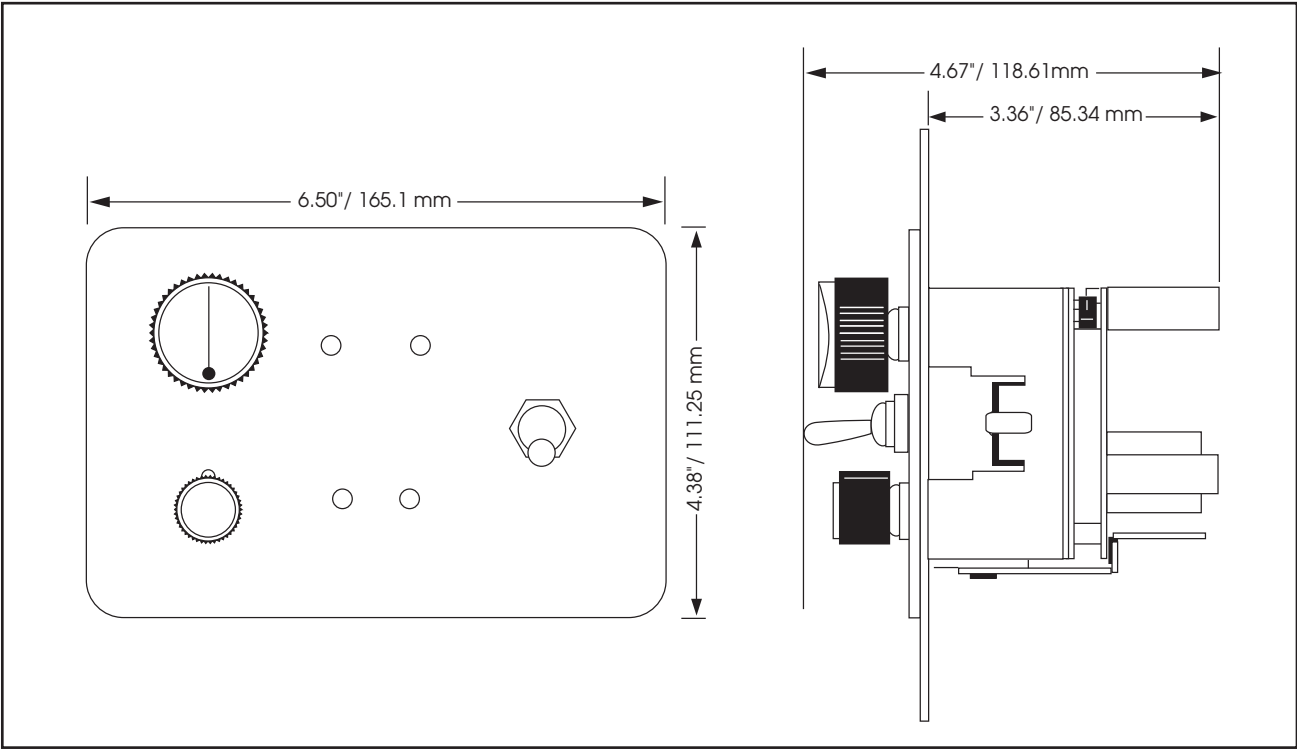

SPECIFICATIONS

Operating Temperature:	-31°F to 150°F	-35°C to 66°C
Net Weight:	3 lbs	1.36 kg
Shipping Weight:	4 lbs	1.81 kg
Dimensions:		
Height	4.38"	112.25 mm
Width	6.50"	165.1 mm
Depth	4.67"	118.61 mm

HOW TO ORDER

Description/Options

Part Number

12VDC Panel Mount Intercom with Primary Unit Option (C)

AD-26PC

12VDC Panel Mount Intercom with Pre-Amp Equipped (-8) and Remote Volume Control Equipped (-M44) options

AD-26P-8-M44

12VDC Panel Mount Intercom with Secondary Unit Option

AD-26PD