



Model SLM200 shown with mounting base options
(ordered separately)

► Model SLM200

StreamLine® Modular High Output Multifunctional Bright LED Beacon

A B C G R

Model SLM200 offers a multifunctional LED beacon with high optical performance. Developed with a multiple input technology, Model SLM200 allows three separate light effects (flashing, strobe and random) controllable via wiring selection. The possibility to select a different light effect per channel is done through an integrated button. Model SLM200 features (24) LEDs and is available in five lamp/lens colors, including Amber, Blue, Clear, Green, and Red.

The flashing light mode has a powerful effect ideal for attracting attention without alarming. If immediate attention is needed, the strobe is the ideal option. The random light pattern is unique in its ability to irregularly flash while drawing attention.

Model SLM200 body material is a self extinguishing polycarbonate material with high impact and UV resistance suitable for outdoor applications.

FEATURES

- Compatible with 12-24VAC/DC or 120-240VAC*
- PLC compatible with PNP or NPN connections (Except Dock Base, only NPN)
- Three separate inputs: flashing, strobe and random
- 100,000 hour LED
- Five LED lamp/lens colors: Amber, Blue, Clear, Green and Red
- Seven mounting base options
- Type 4X, IP66 enclosure
- IP69K** compliant
- CE and UKCA compliant
- UL and cUL Listed

* Voltage is dependent on selected base (sold separately)

** IP69K with select bases SLMBS, SLMBD, SLMBP and included SLM-RR accessory

MODEL	VOLTAGE	FLASH RATE/MINUTE (FLASH MODE)	FLASH RATE/MINUTE (STROBE MODE)	FLASH RATE/MINUTE (RANDOM)
SLM200 *	12-24VAC/DC or 120-240VAC	120/85** (+/-10)	85 (+/-10)	120 (+/-10)

* Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green or (R) Red

**Button determines flash pattern

MAXIMUM OPERATING CURRENT (mA)					
12VDC	24VDC	12VAC	24VAC	120VAC	240VAC
105	75	230	170	65	45


Weight (unit(s) + base = total weight)

SLM200	VOLTAGE	SHALLOW BASE	DEEP BASE	WALL MOUNT	PIPE MOUNT	TWIN WALL MOUNT	2-STACK DOCK BASE	3-STACK DOCK BASE
7.05 oz	12-24VAC/DC	2.12 oz 0.06 kg	4.23 oz 0.12 kg	6.70 oz 0.19 kg	5.29 oz 0.15 kg	9.17 oz 0.26 kg	14.46 oz 0.41 kg	21.16 oz 0.60 kg
0.20 kg	120-240 VAC	—	6.0 oz 0.17 kg	8.47 oz 0.24 kg	6.70 oz 0.19 kg	12.35 oz 0.35 kg	16.58 oz 0.47 kg	24.69 oz 0.70 kg

StreamLine® Modular High Output Multifunctional LED Beacon (SLM200)

SPECIFICATIONS

Lamp Life: 100,000 Hours
 Light Source: LED
 Operating Temperature: -40°F to 131°F -40°C to 55°C



ACCESSORIES FOR DOCK BASE



SLMB23W



SLMB23N



SLM-RR








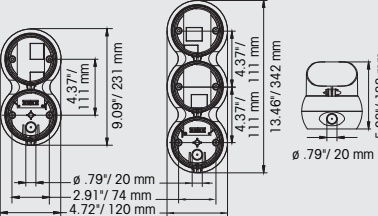
SLMB23V

HOW TO ORDER

- Specify model number SLM200 and color
- Specify required mounting base (see chart)
- Optional dome guard
 For shallow mounting base (SLMDG3)
 For deep mounting base (SLMDG4)
- Accessories for Twin and Wall Mount Bases
 Cable Gland, M20, Gray, 2 Pack (K77700416)
 Cable Gland, M20, Red, 2 Pack (K77700416-01)
- Accessories for Pipe Mount Base
 1" NPT Adapter (SLMNPT1)
 1/2" NPT Adapter (SLMNPT2)
- Accessories for Dock Base
 Wall Mount Bracket (SLMB23W)
 1/2" NPT Adaptor (SLMB23N)
 Retaining Ring (SLM-RR)
 Light Visor (SLMB23V)

MOUNTING BASE OPTIONS

Mounting bases are rated Type 4X. Final product rating is determined by top module. In combination with SLM200 and included/required retaining ring (SLM-RR), the unit is Type 4X, IP66. For IP69K compliance, pair with shallow, deep or pipe mount base.

	Shallow Base	Model Number	Base Color	Voltage	
		SLMBS-012-024GY	Gray	12-24VAC/DC	
		SLMBS-012-024R	Red	12-24VAC/DC	
	Deep Base	SLMBD-012-024GY	Gray	12-24VAC/DC	
		SLMBD-012-024R	Red	12-24VAC/DC	
		SLMBD-120-240GY	Gray	120-240VAC	
		SLMBD-120-240R	Red	120-240VAC	
	Wall Mount	SLMBW-012-024GY	Gray	12-24VAC/DC	
		SLMBW-120-240GY	Gray	120-240VAC	
	Pipe Mount	SLMBP-012-024GY	Gray	12-24VAC/DC	
		SLMBP-120-240GY	Gray	120-240VAC	
	Twin Wall Mount	SLMBT-012-024GY	Gray	12-24VAC/DC	
		SLMBT-120-240GY	Gray	120-240VAC	
 	2-Stack Dock Base	SLMB2-024GY	Gray	24VAC/DC	
		SLMB2-120-240GY	Gray	120-240VAC	
		SLMB3-024GY	Gray	24VAC/DC	
		SLMB3-120-240GY	Gray	120-240VAC	
	Note: Dock bases allow one function per position and include visors. Dock bases are NPN compatible only.				

Rev. B