


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER	MATERIAL	"B" HEIGHT +/- .062	"C" IMPRINT AREA +/- .062	"D" VERTICAL REPEAT +/- .062	LABELS PER ROW	STANDARD PKG. QTY.
S100X075VA1Y	GMV17	0.75 [19.1]	0.25 [6.35]	1.00 [25.4]	4	2500
S100X125VA1Y	GMV17	1.25 [31.8]	0.38 [9.65]	1.50 [38.1]		
^A S100X150VA1Y	GMV17 OR GMV19	1.50 [38.1]	0.50 [12.7]	1.80 [45.7]		
S100X225VA1Y	GMV17 OR GMV18	2.25 [57.2]	0.75 [19.1]	2.50 [63.5]		1500
S100X250VA1Y		2.50 [63.5]	1.00 [25.4]	2.75 [69.8]		
S100X400VA1Y		4.00 [101.6]	1.00 [25.4]	4.25 [108.0]		1000
S100X650VA1Y		6.50 [[165.1]	1.50 [38.1] +/- .10	6.75 [171.4]		250

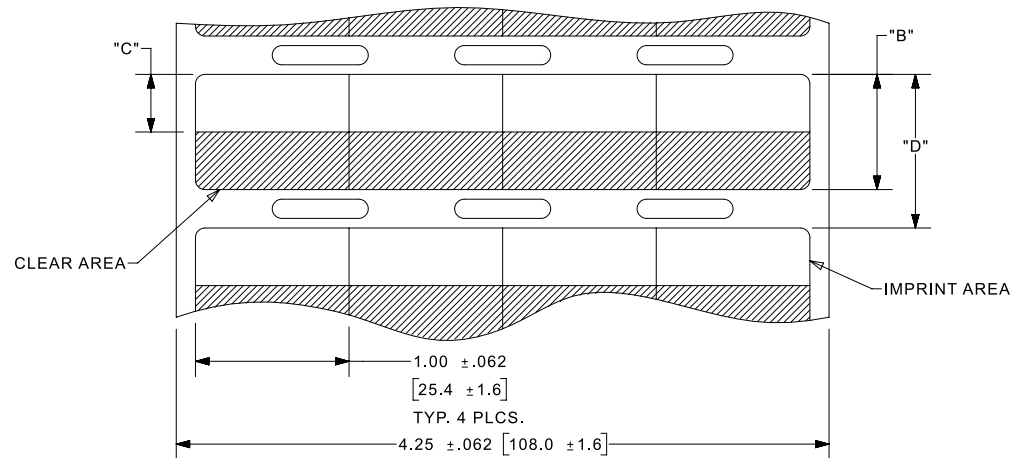

NOTES:
1. MILLIMETERS ARE IN [].

14	7/31/2024	RVU	RYCL	MSAD	A. PN: S100X150VA1Y, REPLACED FROM GMV17 OR GMV18 TO GMV17 OR GMV19.	GAECN07202
13	8/4/2022	JEFP	DAPE	MSAD	CHANGED TO GMV17 OR GMV18 FOR S100X150VA1Y, S100X225VA1Y, S100X250VA1Y, S100X400VA1Y, AND S100X650VA1Y	GAECN06570
12	7/11/22	JEFP	DAPE	MSAD	CHANGED S100X250VA1Y, S100X400VA1Y, AND S100X650VA1Y TO GMV18	GAECN06545
11	1/28/2021	RVU	JADE	RCMC	S100X150VA1Y & S100X225VA1Y MUST use the GMV18 material. S100X075VA1Y, S100X125VA1Y, S100X250VA1Y, S100X400VA1Y, & S100X650VA1Y should be USE GMV17.	GAECN05874
10	12/14/2020	RVU	JADE	RCMC	GMV18 WAS GM16 OR GM17.	GAECN05803
9	12/7/15	RVU	SEWH	JHAC	S100X650VA1Y WAS S100X600VA1Y.	GAECN03273
8	8/18/15	RVU	SEWH	JHAC	UPDATE ON NEW BOARDER WTIH PANDUIT LOGO.	GAECN03102
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE		S100X***VA1Y OPTIMUM SELF-LAMINATING THERMAL TRANSFER PRINTABLE LABELS CUSTOMER DRAWING	
ITEM REVISION NAME		100472BS/18	
DATASET FILE NAME		100472BS_DC/18B C10194_RV14 CUST DWG	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: SEE TABLE	
.x ± .12 [3.05] .xxx ± .025 [.635] .xx ± .062 [1.57] ANGLES ±		DRAWING NUMBER: C10194	
THIRD ANGLE PROJECTION		SIZE A	
DRAWN BY	DATE	CHK	SCALE
RVU	9/22/04	JHAC	NTS
SHT 1 OF 1			