
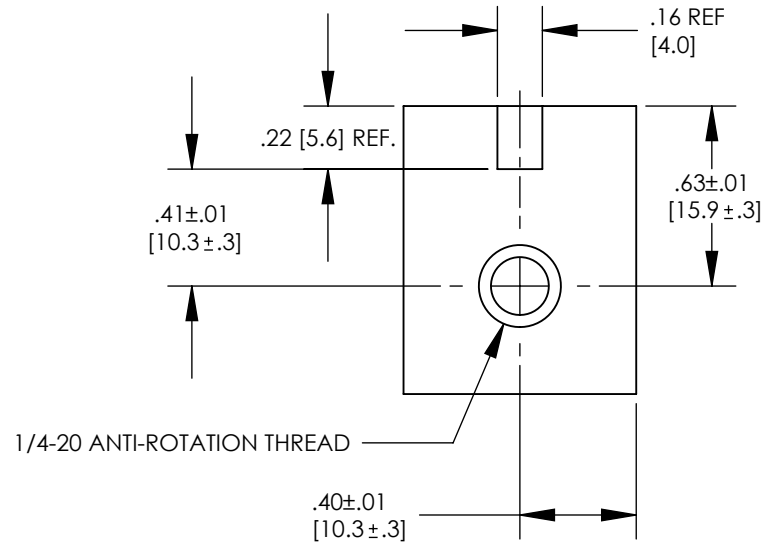
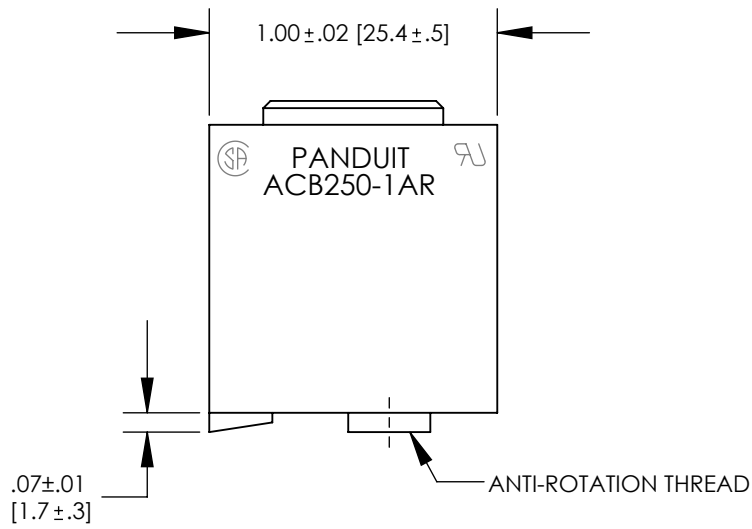
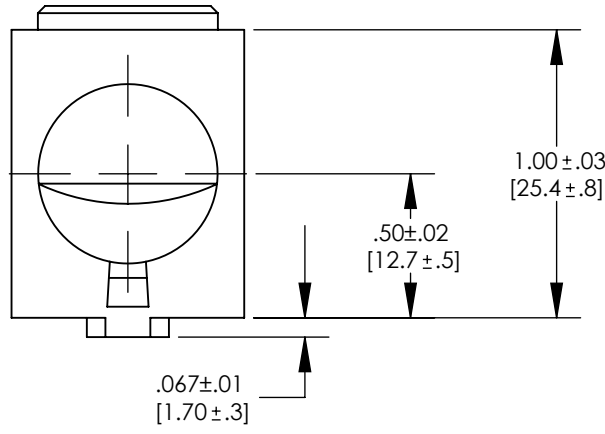
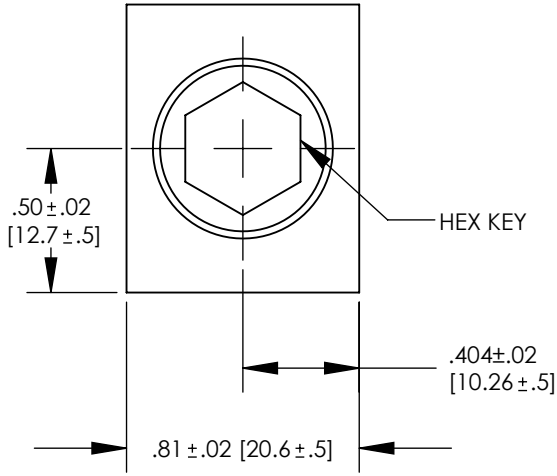



- NOTES:
1. UL RECOGNIZED
CSA CERTIFIED UP TO 600V
CU7AL RATED
 2. TO BE USED WITH COPPER OR ALUMINUM
STRANDED WIRE.
 3. MATERIAL: ALUMINUM, TIN PLATED
 4. CONDUCTOR RANGE: 250 kcmil - #6 AWG
 5. DIMENSIIONS ARE INCHES. DIMENSIONS IN
PARENTHESIS ARE MILLIMETERS.



PA RT NUMBER	PKG. QTY.	WIRE RANGE COPPER/ALUMINUM	WIRE STRIP LENGTH IN [mm]	ANTI-ROTATION THREAD	INSTA LLATION TORQUE IN-LBS [N-m]	HEX KEY	SCREW MAT'L	PART WEIGHT LB [kg]
ACB250-1AR-Q	25	250 kcmil - 6 AWG	1.25 [31.8]	1/4/-20	275 [31.1]	5/16"	ALUMINUM	.053 lb [.024kg]

							TITLE ALUMINUM CONNECTOR BLOCK (ACB250-1AR-Q) CUSTOMER DRAWING					
							ITEM REVISION NAME N41775BA-C41775/01					
							DATASET FILE NAME C41775/01.SLDDRW					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XX ±  THIRD ANGLE PROJECTION			MATERIAL SEE NOTES		
01	11/13	JHNU	JHNU	RGB	REMOVED ACB250-1AR-C REVISED TITLE BLOCK & TOLERANCES	N41775BA-C41775						
00	9/09	JHNU	JHNU	JAC	DRAWING RELEASED				DRAWING NUMBER C41775_01			
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY JHNU	DATE 9/09	CHK JAC	SCALE N/A	SHEET 1 OF 1	SIZE B