
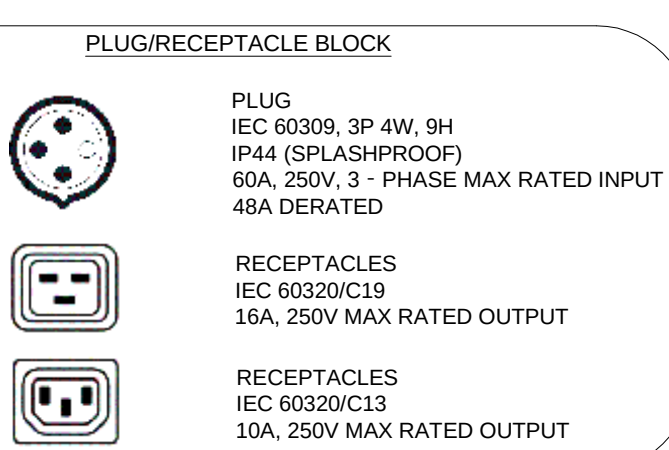
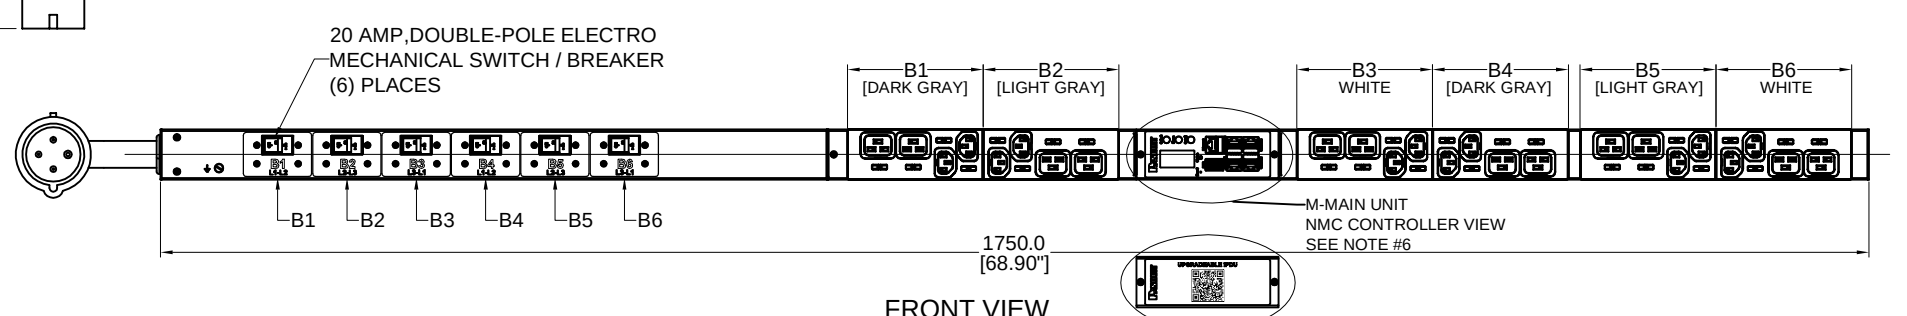
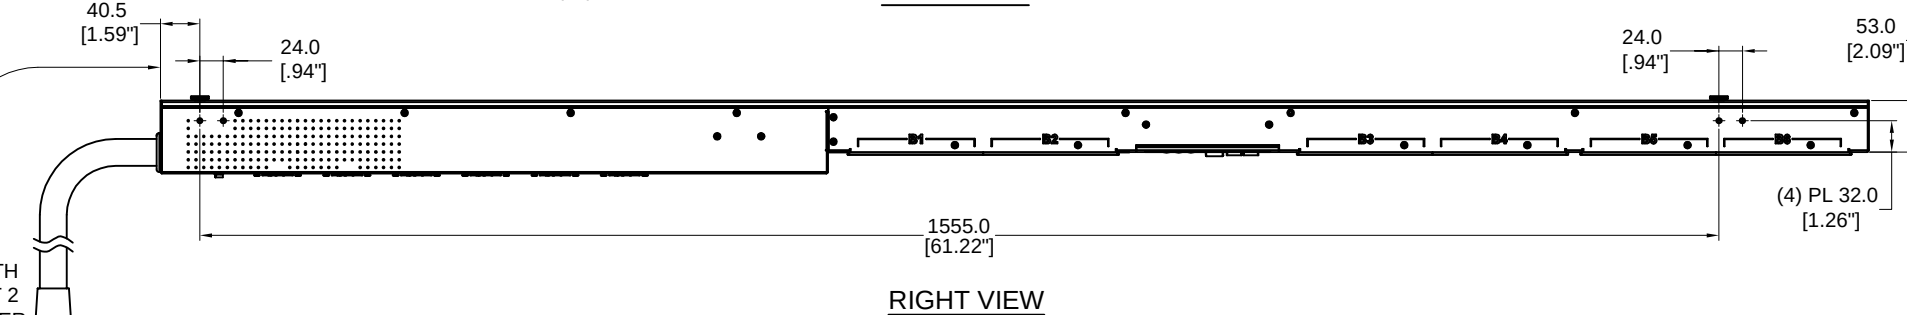
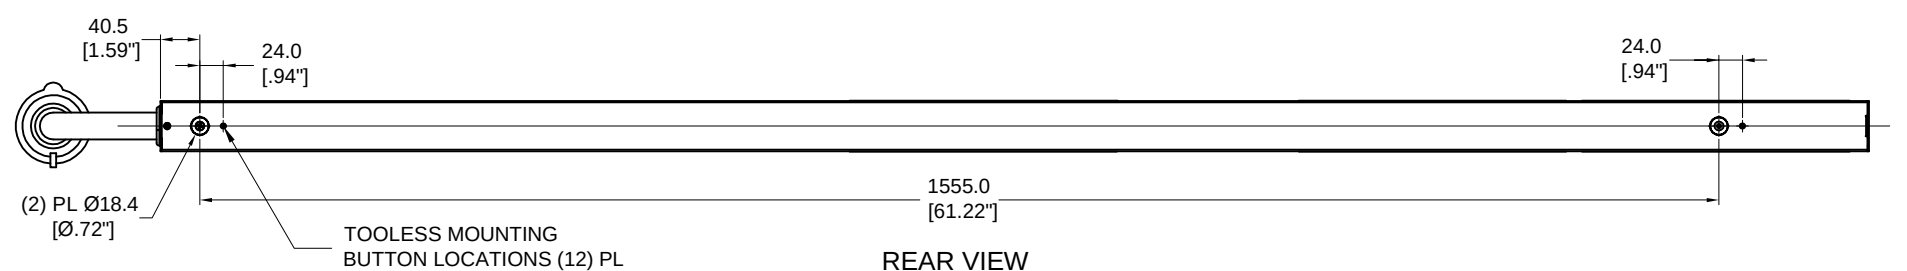


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

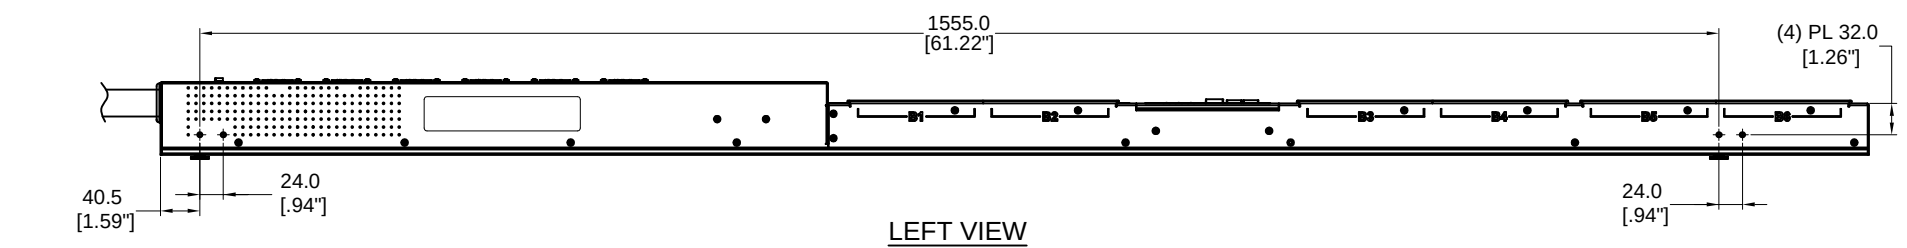

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04A	05/12/2022	FYZ	MIM	MJD	1.ADDED UPGRADEABLE PDU OPTION 2.REMOVED OBSOLETE SKU'S	P24D34M
03B	07/06/2020	CWW	MIM	JAWI	UPDATED THE OUTLET DESIGN	P24D34M
02B	06/21/2019	WKM	MIM	JAWI	UPDATE PLUG DESCRIPTION IN PLUG/RECEPTACLE BLOCK	P24D34M
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO 1 NCLUDE CONFIGURABLE OPTION 'DE-CODER'	P24D34M
01A	07/17/2017	WSJ	MIM	EDM	INITIAL RELEASE	P24D34M


PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

- SPECIFICATION:**
- 1. STANDARD:
 - UNIT TYPE: SEE SHEET 2
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY & TYPE: (12) C13, (12) C19
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 60A (48A DERATED)
 - BREAKER QTY & TYPE: (6) 20AMP, DOUBLE-POLE
 - INPUT PHASE: THREE-PHASE, DELTA
 - RATED POWER: 17.3 kVA
 - INPUT PLUG: IEC 60309 3P+E 9H 60A
 - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT
 - 2. ADDITIONAL: NONE
 - 3. ACCESSORIES:
 - (1) QUICK-START GUIDE

- NOTES:**
- 1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
 - 2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
 - 3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
 - 4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
 - 5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION
 - 6. PARTS USING UPGRADEABLE iPDU BLANKING PANEL CAN BE UPGRADED TO INTELLIGENT MODELS USING PANDUIT CONTROLLER PART NUMBER MA002

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P24D34M-XX Y Z

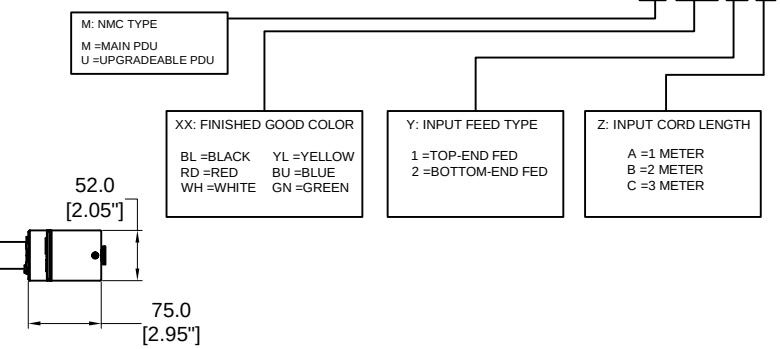

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.


SIGN _____
DATE _____
PRINT _____

TITLE INTELLIGENT SERIES PDU P24D34M-XXYZ CUSTOMER DRAWING	
ITEM REVISION NAME	PANDUIT
DATASHEET FILE NAME:	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0-4<50 ±0.5 50-4<250 ±1.0 250-4<500 ±1.5 500-4<1000 ±2.5 1000-4<2000 ±4.0	
DRAWING NUMBER: P24D34M_DC	
DRAWN BY WSJ	DATE 07/17/2017
CHK SEAN	SCALE NONE
SHT 1 OF 2	
SCALE B	

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

MAIN PDU CONFIGUGRATIONS				
FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24D34M	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10''-5"]	13.7kg
P24D34M-BL1A	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'[+3.5''-1.75"]	11.3kg
P24D34M-RD1A	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'[+3.5''-1.75"]	11.3kg
P24D34M-RD1C	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'[+10''-5"]	13.7kg
P24D34M-YL1A	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'[+3.5''-1.75"]	11.3kg
P24D34M-YL1C	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'[+10''-5"]	13.7kg
P24D34M-BU1A	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'[+3.5''-1.75"]	11.3kg
P24D34M-BU1C	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'[+10''-5"]	13.7kg
P24D34M-BL2A	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3'[+3.5''-1.75"]	11.3kg
P24D34M-BL2C	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10''-5"]	13.7kg
P24D34M-RD2A	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3'[+3.5''-1.75"]	11.3kg
P24D34M-RD2C	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10'[+10''-5"]	13.7kg
P24D34M-YL2A	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3'[+3.5''-1.75"]	11.3kg
P24D34M-YL2C	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10'[+10''-5"]	13.7kg
P24D34M-BU2A	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3'[+3.5''-1.75"]	11.3kg
P24D34M-BU2C	VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10'[+10''-5"]	13.7kg
UPGRADEABLE PDU CONFIGUGRATIONS				
FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24D34U	UPGRADEABLE,VERTICAL,(12) C13,(12)C19,MONITORED INPUT, 200-240V/60A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10'[+10''-5"]	13.4kg

04A	05/12/2022	FYZ	MIM	MJD	1.ADDED UPGRADEABLE PDU OPTION 2.REMOVED OBSOLETELED SKU'S	P24D34M
03B	07/06/2020	CWW	MIM	JAWI	UPDATED THE OUTLET DESIGN	P24D34M
02B	06/21/2019	WKM	MIM	JAWI	UPDATE PLUG DESCRIPTION IN PLUG/RECEPTACLE BLOCK	P24D34M
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO I NCLUDE CONFIGURABLE OPTION 'DE-CODER'	P24D34M
01A	07/17/2017	WSJ	MIM	EDM	INITIAL RELEASE	P24D34M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE INTELLIGENT SERIES PDU P24D34M-XYZ CUSTOMER DRAWING			
ITEM REVISION NAME			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION		N/A	
		DRAWING NUMBER: P24D34M_DC	
DRAWN BY WSJ	DATE 07/17/2017	CHK SEAN	SCALE NONE
SHT 2 OF 2			SCALE B