


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	1250 kcmil
Wire Type	Stranded Copper; Class B; Compressed or Concentric
Wire Strip Length	3-3/8 in.
Stud Size	1/2 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	N/A
Panduit Color Code on Barrel	YELLOW
Panduit Die Index No. on Barrel	P140
Alternate Industry Die Index No. () on Barrel	(29)

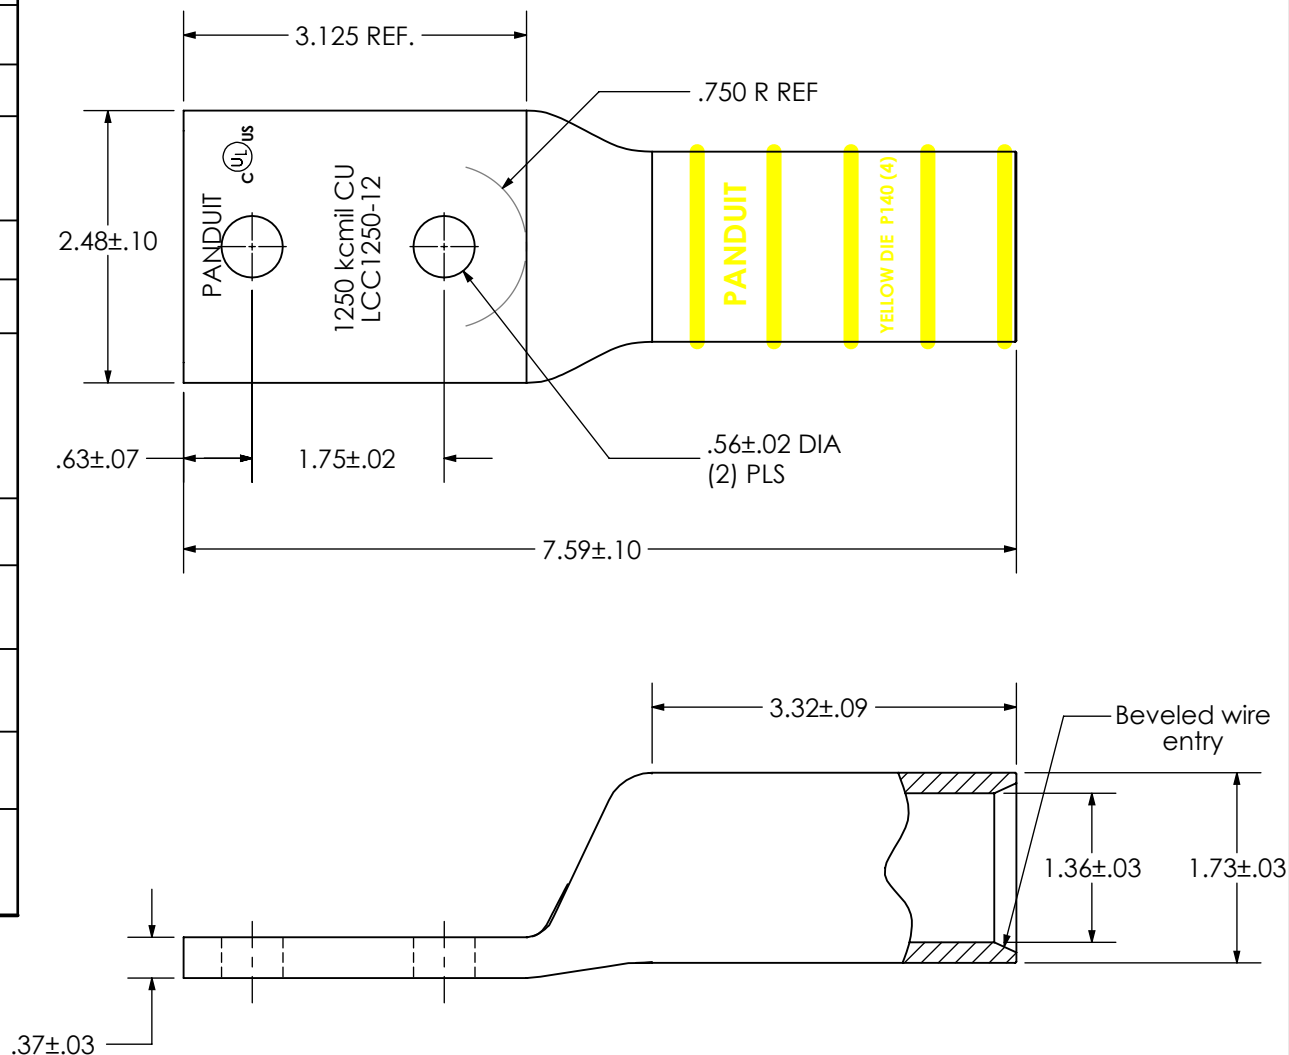

								 PANDUIT CORP. TINLEY PARK, ILLINOIS	
01	4/19	JHNU	TMR	REVISED TOLERANCES, REVISED ALTERNATE DIE INDEX # REVISED BARREL LENGTH: 3.32 WAS 3.31, ADDED TONGUE LENGTH DIM	046154	RGB	RGB	LCC1250-12-3 Copper Lug - Two-Hole, Long Barrel	
00	11/16	JHNU	JHNU	DRAWING RELEASED	019777	RGB	RGB		
REV	DATE	BY	CHK	DESCRIPTION	ECN	-R	SUP	SCALE N/A	DRAWING NO / CAD FILE LCC1250-12-CUST