



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

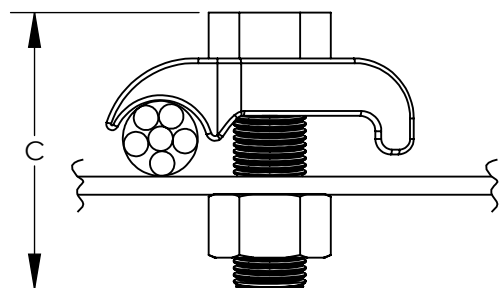


NOTES:

1. MADE FROM HIGH COPPER CONTENT ALLOY. FURNISHED WITH FULL THREADED SILICON BOLT, NUTS, AND LOCKWASHERS.
2. THESE CONNECTORS ARE UL LISTED FOR GROUNDING AND BONDING, AND DIRECT BURIAL APPLICATIONS.
3. SEE www.PANDUIT.com FOR PACKAGE QUANTITIES.

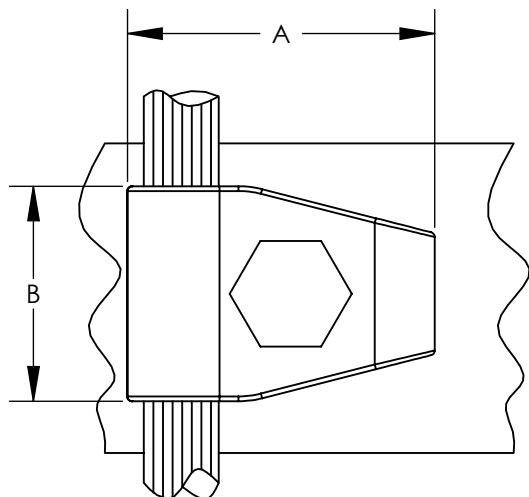

DB 
RATED

PANDUIT PART NUMBER	CONDUCTOR RANGE	DIMENSIONS - IN [mm] ±.1 [2.5]			BOLT DIA
		A	B	C	
GMS-1-X	8 SOL - 4 STR	1.25 [32]	1.00 [25]	1.63 [41]	3/8"
GMS-2-Q	4 SOL - 2/0 STR	1.63 [41]	1.13 [28]	1.75 [44]	3/8"
GMS-3-Q	2/0 SOL - 250 kcmil	2.13 [54]	1.50 [38]	2.00 [51]	1/2"
GMS-4-X	300 kcmil - 500 kcmil	2.38 [60]	1.63 [41]	2.50 [63]	1/2"

							TITLE BRONZE GROUND CLAMP GMS SERIES CUSTOMER DRAWING								
							ITEM REVISION NAME N41170BA/06			PANDUIT					
							DATASET FILE NAME N41170BA-C41170/06.SLDDRW								
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XXX ± .XX ± ANGLES ± THIRD ANGLE PROJECTION						MATERIAL SEE NOTES		
06	7/18	JHNU	JHNU	RGB	ADDED GMS-4-X	038340									
05	11/15	JHNU	JHNU	RGB	REVISED WIRE RANGE FOR GMS-3-Q: 2/0 SOL WAS 2/0 STR	N41170BA-C41170							DRAWING NUMBER C41170		
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY ED	DATE 10/95	CHK WJB	SCALE N/A	SHEET 1 OF 1		SIZE A		