

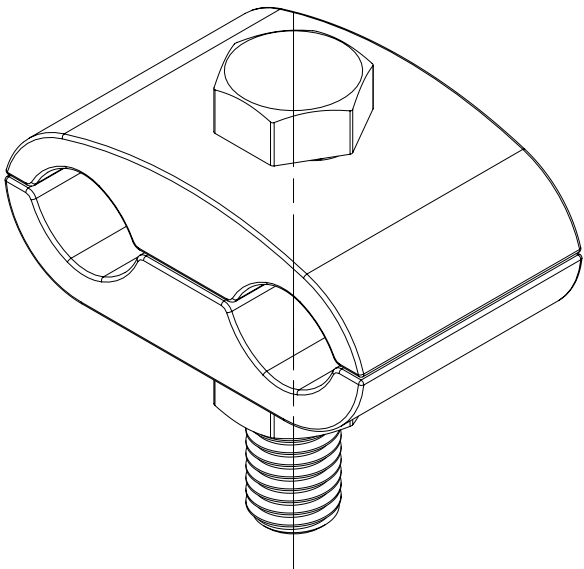


PANDUIT PART NUMBER	COPPER CONDUCTOR RANGE	HARWARE SIZE	TORQUE	DIMENSIONS (IN.)		
				A	B	C
GH-1-Q	8 SOL. - 4 STR.	3/8"-13	20 FT.-LB.	1-1/4"	1-1/2"	1-3/8"
GH-2-X	4 SOL. - 2/0 STR.	3/8"-13	20 FT.-LB.	1-1/2"	2"	1-5/8"
GH-5-1	500 - 750 KCMIL	5/8"- 11	55 FT.-LB.	3-1/4"	3-3/8"	2-3/8"
GH-6-1	750 - 1000 KCMIL	5/8"- 11	55 FT.-LB.	3-5/8"	3-3/4"	2-1/2"

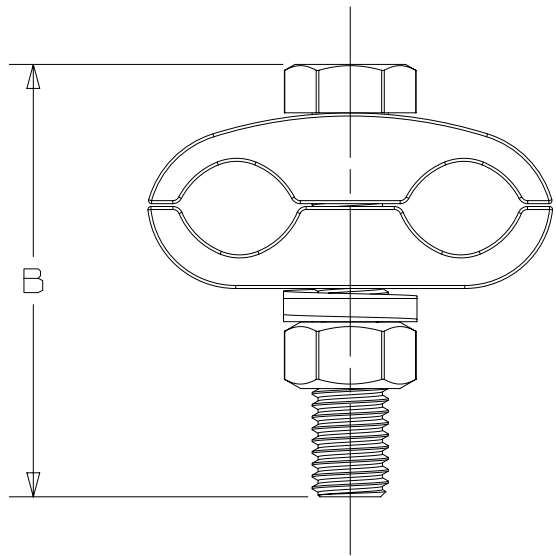


NOTES:

1. MATERIAL: HIGH COPPER CONTENT ALLOY (BODY); SILICON BRONZE HARDWARE
2. PARTS ARE cULus LISTED TO UL467/CSA22.22 No. 41 FOR GROUNDING AND BONDING.
3. CONNECTIONS ACCOMMODATE TWO EAQUAL SIZE CONDUCTORS IN SPECIFIED RANGE.
4. ACCOMMODATE BAR THICKNESS OF 0.250 (6.35) MAX.
5. RATED FOR DIRECT BURIAL.
6. SEE PACKAGING LABEL FOR TIGHTENING TORQUE.

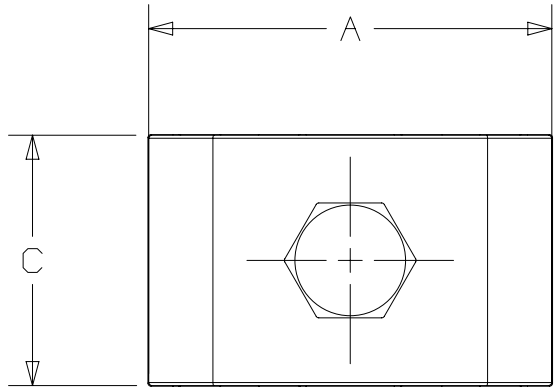

467
LISTED
SUITABLE FOR
DIRECT BURIAL

							TITLE					
							GH-SERIES GROUND BAR CLAMP CONNECTORS					
							CUSTOMER DRAWING					
							ITEM REVISION NAME			00143EAK/00		
							DATASET FILE NAME			00143EAK-GH-SERIES GROUND CLAMPS-DC/00A		
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			MATERIAL:		
							.X ± .XXX ± .XX ± 0.05			ANGLES ±		SEE NOTES
00	6-24-18	RWK	-	RGB	DRAWING ISSUED.					THIRD ANGLE PROJECTION		DRAWING NUMBER: 00143EAK - DC
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE B
							RWK	6/24/2018	-	N/A		