



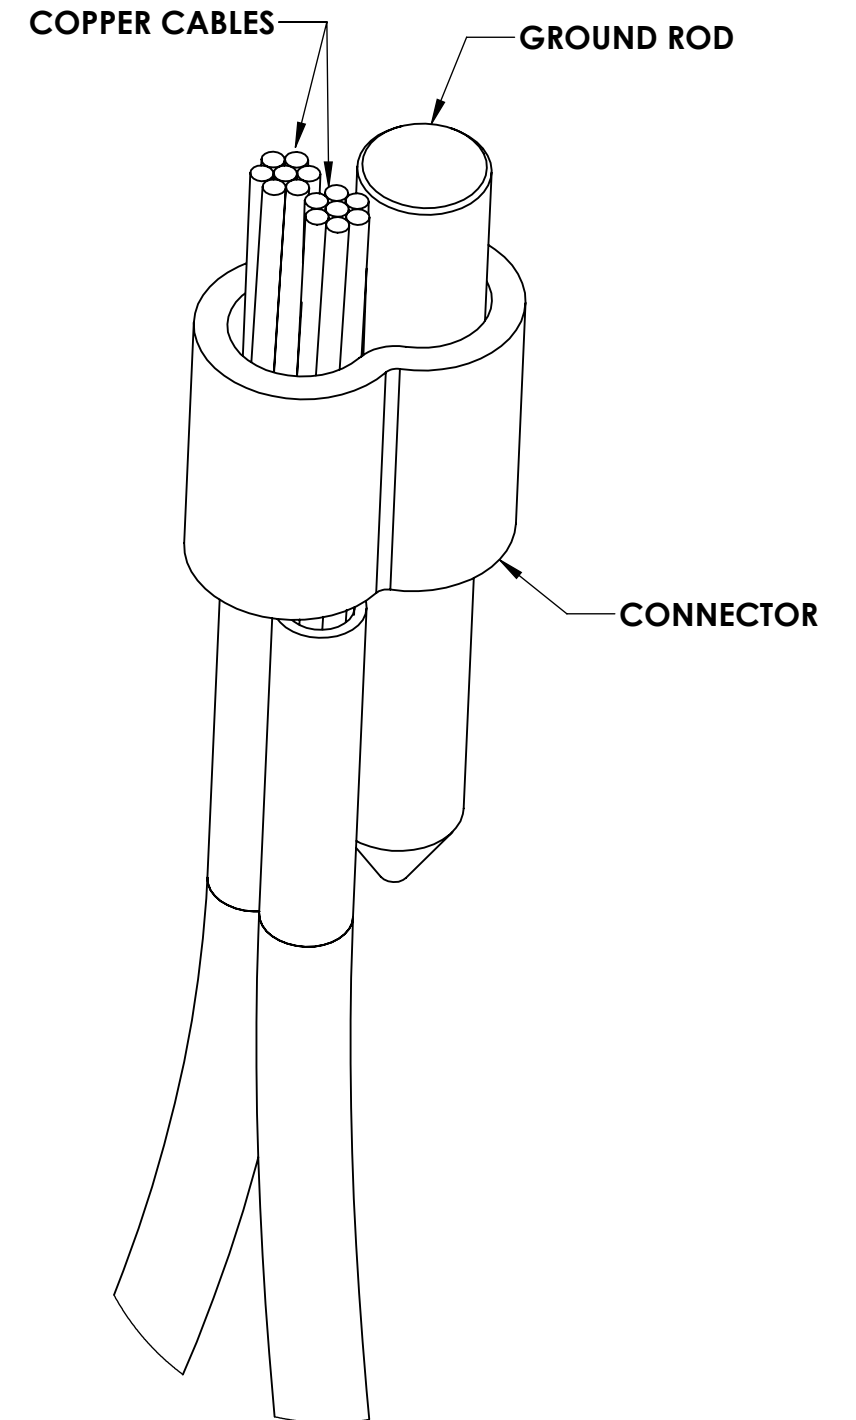


PANDUIT PART NUMBER	NOMINAL GROUND ROD SIZE	COPPER CABLE - AWG (METRIC)	DIMENSIONS - IN [mm]				PANDUIT DIE COLOR CODE INDEX (QTY OF CRIMPS)	STD. PKG. QTY.
			WIRE O.D.	ROD O.D.	WIDTH	WALL		
PTC-1/2-26	1/2" ROD (12.7mm)	ONE CABLE: 6 AWG - 3/0 AWG (16-70 sq mm) TWO CABLES: 6 AWG - 2 AWG (16-25 sq mm)	0.85 [21.59]	0.85 [21.59]	1.31 [33.20]	0.16 [4.06]	BROWN P87 (2)	1
PTC-5/8-26	5/8" ROD (15.9mm)	ONE CABLE: 6 AWG - 4/0 AWG (16-95 sq mm) TWO CABLES: 6 AWG - 2 AWG (16-25 sq mm)	0.89 [22.61]	0.89 [22.61]	1.42 [36.07]	0.14 [3.56]		1
PTC-3/4-140	3/4" ROD (19.1mm)	ONE CABLE: 1/0 AWG - 4/0 AWG (70-95 sq mm)	0.99 [25.15]	1.19 [30.10]	1.80 [45.72]	0.20 [5.08]	PINK P99 (2)	1

NOTES:

1. DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.
2. ALL PARTS ARE cULus LISTED TO UL 467 FOR GROUNDING AND BONDING APPLICATIONS.
3. ALL PARTS ARE SUITABLE FOR DIRECT BURIAL IN EARTH OR CONCRETE.
4. FOR USE WITH COPPER CLAD GROUND RODS ONLY.
5. FOR USE WITH STRANDED WIRE ONLY, NO SOLID WIRE.

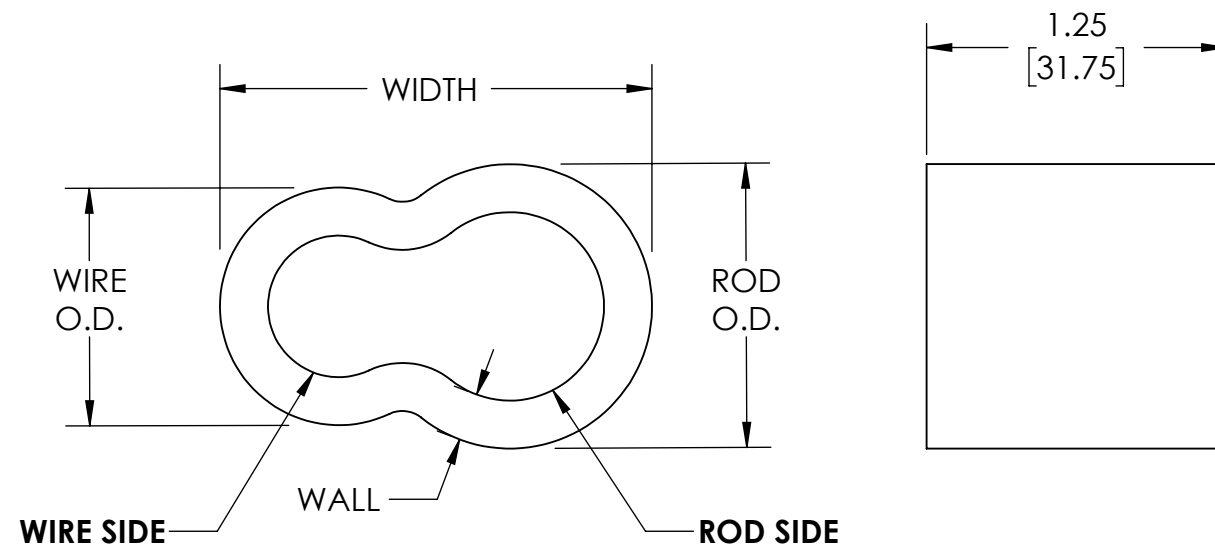

							TITLE PIGTAIL FIGURE 8 COPPER COMPRESSION GROUNDING TAP CONNECTORS CUSTOMER DRAWING						
							ITEM REVISION NAME 00195EFD/01						
							DATASET FILE NAME 00195EFD-DC/01.SLDDRW						
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XX ±					MATERIAL HIGH CONDUCTIVITY COPPER	
01	1/19	DAOS	JHNU	RGB	REVISED METRIC WIRE RANGE							DRAWING NUMBER 00195EFC-DR	
00	8/18	DAOS	JHNU	RGB	DRAWING RELEASED		THIRD ANGLE PROJECTION						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY DAOS	DATE 8/24/18	CHK JHNU	SCALE N/A	SHEET 1 OF 1	SIZE B	