


overview

The Panduit® SmartZone™ UPS with maintenance free VRLA battery, 3-Phase 230/400 V unit is a true Online Double Conversion system that delivers highly efficient and reliable power protection for your computer IT equipment. With excellent electrical performance, enhanced intelligent monitoring, and network functions, complying with EMC and safety standards to meet the continually growing power demands of Data Center, Enterprise and Edge IT equipment.

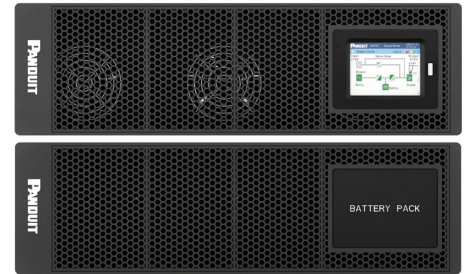

key features and benefits

Online double conversion with fully digital control	Provides stable and clean power with less ripple and by filtering noise, automatic voltage regulation (AVR) and surge protection
Wide input voltage range	138-485Vac, covering extended voltage range, applicable for severe situation such as large power grid fluctuation
High efficiency	Up to 98.5%, reducing the energy waste and the cost of electricity
Energy savings	High Efficiency on Smart ECO mode for Online Double Conversion models
Green design	RoHS and Reach, CE/UL/ENERGY STAR® 2.0 compliant for North America units
Output unity power factor	Means more active power for customer's load
Input power factor	Power factor correction topology on the input side dramatically reducing the total harmonic distortion (THD)
Matchable battery packs	Allows to connect maximum four external battery packs, extending the UPS backup time
Three-stage battery charging method	Three-stage battery charging method matching the most optimal curve and temperature compensated with advanced algorithms prolonging the battery life
EPO function (emergency power off)	Allows to quickly and easily shut down the UPS when emergency event occurs
Generator compatible	Wide input frequency and voltage, supports connecting to generators, ensuring the uninterruptible operation
Hot-Swappable battery design	Can perform the replacement of battery cartridge without powering down the UPS
Cold start function	Allows to boot up the UPS without mains input but with batteries
Intelligent fan speed regulation	Automatic adjustment of fan speed due to the ambient temperature and load percentage
Touch-screen colorful LCD	Colorful LCD with cold start button and LED indicators, providing intuitive display
Multiple communication interface	RS232/RS485/USB/intelligent slot, realizing communication and monitoring function
Comprehensive protection function	Short-circuit, overload, overheat, battery overcharge and over discharge, output low voltage and fan fault alarm
Parallel functionality	Connect up to 4 units to achieve very high availability of backup power
Inverter design	3-Level IGBT for significant advantages of high efficiency, impact resistance, and reliability
Additional redundancy	Shared battery group and support dual input to achieve very high availability of backup power
Output options	Supports 3-Phase or single phase output
Intelligent Network Card (included with N models*)	Provides hardened security remote access via Ethernet Secure SNMPv3 protocol to monitor and manage the UPS, micro-USB for firmware upgrade and RS-485 for connecting environmental and security sensors. Built-in WiFi and Bluetooth hardware support with future optional firmware upgrade.
SmartZone™ Cloud Ready (included with N models*)	Support for technology allowing to easily, securely, and quickly connect to SmartZone™ Cloud DCIM with management, monitoring, control and alerting of Power Chain, Environmental, Cooling, Security, Asset and Connectivity Infrastructure Assets.
SmartZone™ mPower Management Software	Configure, monitor, and manage the UPS (includes graceful equipment shutdown) remotely via RS-232 or USB or Ethernet. Software is available for free download from www.panduit.com/ups .

*N Model UPS has an N in the 4th digit of the part number, e.g. U10N32V

product specifications

International 10-20kVA Lead-Acid 230/400V 3-Phase Units							
MODEL		U10S32V / U10N32V		U15S32V / U15N32V		U20S32V / U20N32V	
Output power capacity		10000 VA		15000 VA		20000 VA	
Max Configurable Power (Watts)		10000 W		15000 W		20000 W	
Nominal output voltage		380/400 (default) / 415 Vac (3Ph+N+PE) 220 / 230 / 240 Vac (1Ph+N+PE)					
Output voltage distortion	Linear Load	<2%					
	Non Linear Load	<5%					
Output frequency	Online mode	50 / 60 ± 10% Hz (± 5%, ± 4%, ± 2%, ± 1% selectable)					
	Battery mode	50/60 ± 0.1 Hz					
Output power factor		1					
Topology		Double Conversion Online					
Waveform		Pure Sine Wave					
Overload capability	Online mode	105% - 110%: 60 min; 110% - 125%: 10 min; 125% - 150%: 1 min; > 150%: 500 ms, transfer to bypass					
	Battery mode	105% - 110%: 60 min; 110% - 125%: 10 min; 125% - 150%: 1 min; > 150%: 500 ms, shut down					
Transfer time (typical)	Online mode <-> Battery mode	0 ms					
	Inverter <-> Bypass	0 ms					
Efficiency	Online mode	95.5%	95.5%		95.5%		
	ECO mode	98.0%	98.5%		98.5%		
Output connection		HW terminal					
Bypass		Internal					
INPUT							
Nominal input voltage		380/400 (default) / 415 Vac (3Ph+N+PE)					
Input voltage range	Full load	305 - 485 Vac					
	Half load	138 - 485 Vac					
Input frequency range		40 - 70 Hz (auto sensing)					
Input connection		HW terminal (L+N+G)					
Input power factor		>0.99 (full load)					
BATTERY							
Battery type		VRLA					
Typical recharge time		4-5 hrs.					
Battery voltage		480 Vdc					
Battery quantity × capacity		40 × 12 V/9 Ah					
Charging current (max.)		12A					
Backup time	Full load	11 min.	6.4 min.		4.1 min.		
	Half load	28.7 min.	19 min.		11.8 min.		
Expected Battery Life (years)		3-5 yrs.					
EBP Replacement Cartridge		UVD480					
Additional External Battery Pack (EBP)		UVP480					
Maximum External Battery Pack (EBP) quantity		8 units					

product specifications

International 10-20kVA Lead-Acid 230/400V 3-Phase Units (continued)

COMMUNICATION & MANAGEMENT

Communication ports	USB, RS232, RS485, intelligent slot		
Pre-Installed SmartZone™ iNMC Card	N model only		
Local Display/Control Panel	3.5 inch colorful touch screen		
Audible Alarm	Yes		
Emergency Power Off (EPO)	Yes		

ENVIRONMENTAL

Operating temperature	32°F - 104°F (0°C - 40°C) (no derating)		
Storage temperature	-25°C - 55°C (without batteries)		
Relative humidity	0 - 95% (non-condensing)		
Operating elevation	Up to 3000 m (derated 10%)		
Online thermal dissipation	1607 BTU/hr.	2411 BTU/hr.	3215 BTU/hr.
Protection Class	IP20		
Noise level	<58dB at 1 m		

CONFORMANCE

Safety	CB: IEC62040-1:2013, CE-LVD: EN62040-1:2008+A1:2013, UKCA: BS62040-1-2013		
EMC	IEC 62040-2-2016, EN 62040-2-2018, BS62040-2-2018		
Transportation	ISTA Procedure 2B		
Surge protection	IEEE/ANSI C62, 41 Category A, Level 3; 600Joules		

CUSTOMER SERVICE

Warranty	3 years for UPS and EBP, 2 years for VRLA battery cartridges		
----------	--	--	--

SUSTAINABLE OFFER STATUS

Proposition 65 Warning	See Safety Sheet (IM053)		
------------------------	--------------------------	--	--

PHYSICAL

Maximum Height	131mm UPS + 175mm Battery		
Maximum Width	440mm + 443mm Battery		
Maximum Depth	660mm + 896mm Battery		
Rack Height	7 RU		
Net Weight	180kg		
Shipping Weight	220kg		
Shipping Height	280mm UPS + 340mm Battery + 114mm Pallet		
Shipping Width	770mm Pallet		
Shipping Depth	1060mm Pallet		
Color	Black		

EBP specifications

MODEL	UVP480
MATCHED UPS	U10S32V / U15S32V / U20S32V / U10N32V / U15N32V / U20N32V
BATTERY SYSTEM	
Battery type	VRLA (lead acid maintenance free battery)
Typical battery life	3-5 years, depend on discharging cycle and ambient temperature
System voltage	480Vdc
Battery quantity	40 pcs.
Battery capacity	12 V/9 Ah
Replacement cartridge set	UVD480
PHYSICAL	
Maximum Height	131mm
Maximum Width	443mm
Maximum Depth	896mm
Rack Height	4 RU
Net Weight	153kg
Shipping Weight	180kg
Shipping Height	340mm Battery + 114mm Pallet
Shipping Width	770mm Pallet
Shipping Depth	1060mm Pallet
ENVIRONMENTAL	
Operating temperature	0°C - 40°C
Relative humidity	0 - 95% (non-condensing)
Noise level	0dB
CONFORMANCE	
Safety	CB: IEC62040-1:2013, CE-LVD: EN62040-1:2008+A1:2013, UKCA: BS62040-1-2013
Transportation	ISTA Procedure 2B

PDU 10-20k

PANDUIT MODEL		UMB20K	
Power capacity		20kVA/20kW (10-15kVA/kW compatible)	
Transfer time		0 ms	
Single line diagram			
Model		3:01	3:3
INPUT			
Input power capacity		20kVA/20kW (10-15kVA/kW compatible)	
Nominal input voltage		Mains: 380/400/415 VAC Bypass: 220/230/240 VAC	Mains & Bypass: 380/400/415 VAC
Input connection		Hardwire connection (L1+L2+L3+N+PE)	Hardwire connection (L1+L2+L3+N+PE)
Input voltage range		138 to 485 VAC	138 to 485 VAC
Maximum input current		Mains: 42.9A Bypass: 125.1A	Mains: 42.9A Bypass: 41.7
OUTPUT			
Output power capacity		20kVA/20kW (10-15kVA/kW compatible)	
Nominal output voltage		220/230/240 VAC	380/400/415 VAC
Output connection		Hardwire connection (L+N+PE)	Hardwire connection (L1+L2+L3+N+PE)
Maximum total current		90.9A	30.4A
MBS		Yes	Yes
MAIN CIRCUIT WIRING SIZE (Typical)			
Single Feed	Input	35mm²	16mm²
	Output	25mm²	10mm²
Dual Feed	Input	16mm² (Mains)	16mm²
		35mm² (Bypass)	
	Output	25mm²	10mm²
MBS circuit wiring size (Typical)		0.5mm²	
INTERNAL WIRING DIMENSIONS			
Connection mode		Input	Output
Main		Black 1015 8 AWG RoHS	Black 1015 8 AWG RoHS
Bypass		Black 1015 8 AWG RoHS	Black 1015 8 AWG RoHS
Maintenance bypass		Black 1015 8 AWG RoHS	Black 1015 8 AWG RoHS
MBS terminal		Black 60227IEC53(RVV) 2C/0.5mm² Power cable RoHS	

PDU 10-20k (continued)

BREAKER	
Input & Output & Maintain	Mains: NDB1-63 C50A/3P 50A/400/415Vac 6KA RoHS Bypass: NDB1-63 C50A/3P 50A/400/415Vac 6KA RoHS Output: NDB1-63 C50A/3P 50A/400/415Vac 6KA RoHS Maintenance: NDB1-63 C50A/3P50A/400/415Vac 6KA RoHS
ENVIRONMENTAL	
Operating Temperature	0°C to 40°C
Storage Temperature	-25°C to +55°C
Operating/Storage Humidity	0 - 95% (non-condensing)
Operating Elevation	0 to 2000 m
PHYSICAL	
Dimension W × D × H	440 × 660 × 131mm
Net Weight	15kg
REGULATORY COMPLIANCE	
Safety	CB: IEC62040-1:2013, CE-LVD: EN62040-1:2008+A1:2013, UKCA: BS62040-1-2013
EMC verification	IEC 62040-2-2016, EN 62040-2-2018, BS62040-2-2018
Transport	ISTA Procedure 2B


UPS accessories

UNCP01	Panduit® Intelligent Network Management Card (iNMC)
UMB20K	SmartZone™ PDU (Maintenance Bypass Switch) (17.3 in. × 25.98 in. × 5.1 in.) (440mm × 660mm × 131mm) (15kg)
URMKIT2	Rack mount rail kit for 5-20kVA UPS and 5-10kVA EBP
URM480	Rack mount rail kit for External Battery Pack 480 V Chassis
EXTWLAUPS3	10-20kVA LEAD ACID UPS 1 YR Extended Warranty, for up to 3 years. The extended warranty includes repair or replacement of UPS and covers your battery
EXTWLABPS3	10-20kVA LEAD ACID Battery Pack 1 YR Extended Warranty, for up to 3 years. The extended warranty includes repair or replacement and covers your battery


U10N32V / U15N32V / U20N32V (Rear)



UVP480 (Rear)

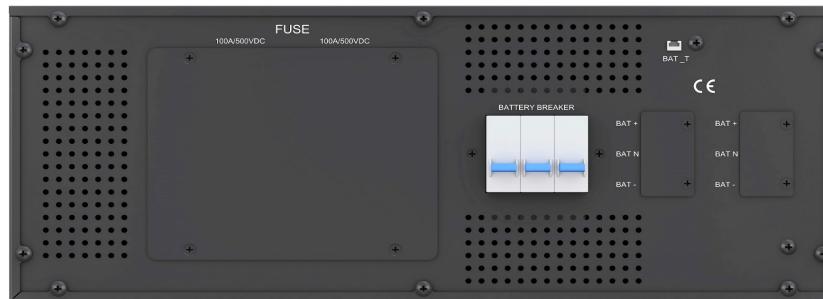

UMB20K (Front)

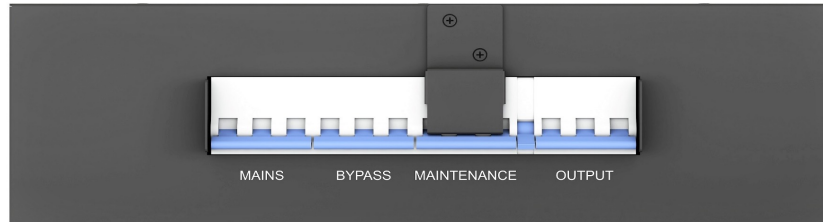

UMB20K (Rear)



WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT®

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

© 2023 Panduit Corp.
ALL RIGHTS RESERVED.
PUSP84-WW-ENG
2/2023