

2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

T568B WIRING SCHEME

PLUG POSITION:	CABLE WIRE:
1	WHITE/ORANGE
2	ORANGE
3	WHITE/GREEN
4	BLUE
5	WHITE/BLUE
6	GREEN
7	WHITE/BROWN
8	BROWN


PART NUMBER	LENGTH	CABLE JACKET COLOR	CABLE JACKET FLAME RATING
FC-OCC01MBL	1m (39.4")	BLACK	CM
FC-OCC03MBL	3m (118.1")	BLACK	CM

NOTES:

1. NOMINAL CORD JACKET DIAMETER IS .290in. (7.3mm).
2. CONSTRUCTED WITH 26AWG STRANDED CAT 6A SF/UTP CABLE.
3. TERMINATED WITH (8 POSITION) CAT 6A MODULAR PLUG AT ONE END PER T568B AND FIELD TERMINABLE SPLICE MODULE ON OTHER END.
4. TERMINATES 22-26AWG SOLID OR STRANDED UTP CABLE
5. COMPATIBLE WITH CABLE JACKET $\varnothing$ 0.249" (6.3mm) - 0.323" (8.2mm)
5. MATERIALS:
PLUG: POLYCARBONATE
SPLICE HOUSING: NICKEL PLATED STEEL
6. DIMENSIONS IN [] ARE IN METRIC.

CAT 6A SF/UTP CABLE

0.94
[23.8]

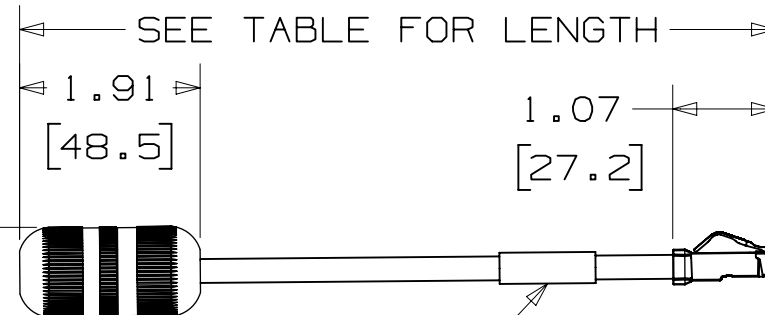

IDENTIFICATION LABEL

FIELD TERMINABLE SPLICE MODULE

MODULAR PLUG

PART NUMBER		SEE TABLE	
TITLE		TX6A™ Shielded/Outdoor FieldCord™	
CUSTOMER DRAWING			
ITEM REVISION NAME	00564EAA/04		
DATASET FILE NAME	00564EAA_DC_04B		
MATERIAL		SEE NOTES	
DRAWN BY		DATE	
BJN		9-28-21	
CHK		BSN	
SCALE		NONE	
DRAWING NUMBER		00564EAA-DC	
SHEET 1 OF 1		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04B	11-4-21	JB0	BSN	TMBA	UPDATED DIMENSION, SEE ECN FOR DETAILS	00564EAA-DC

2

1