


D10100DB/17


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

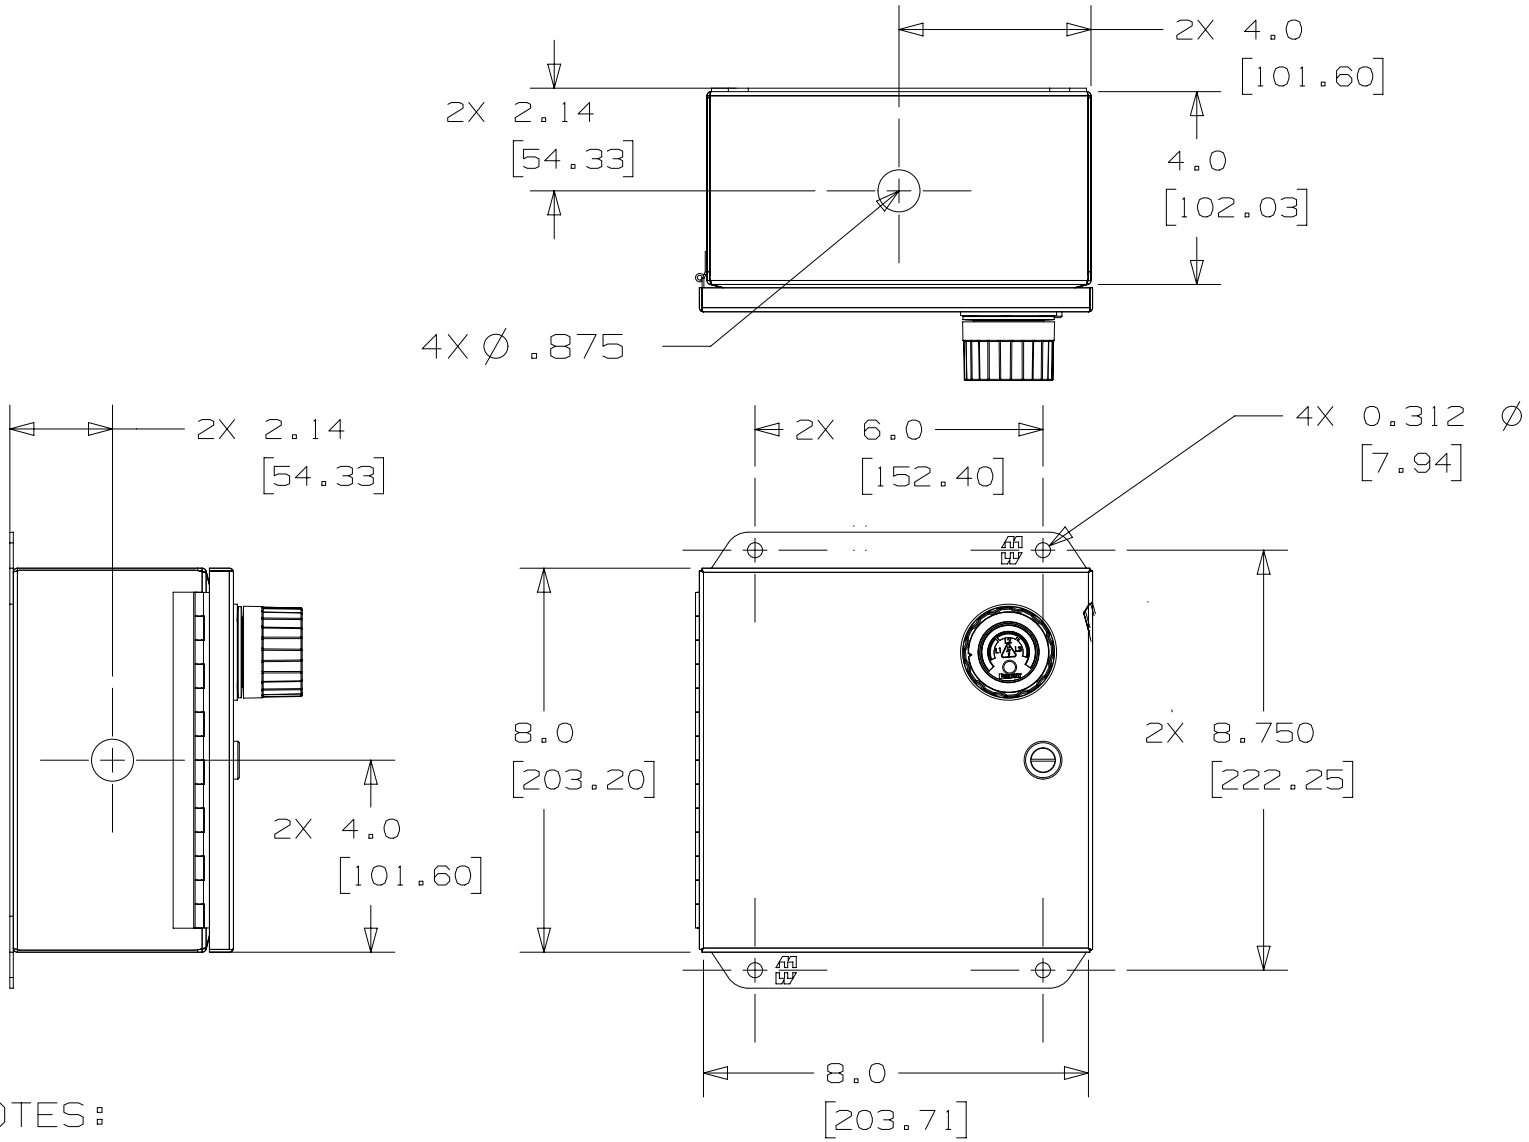

NOTES:

1. PRODUCT INCLUDES ONE VERISAFE ABSENCE OF VOLTAGE TESTER
2. RETROFIT BOX ALLOWS REMOTE INSTALLATION OF INDICATOR AND ISOLATION MODULE
3. BOX MEETS UL508A TYPE 3R, 4, 12, AND 13 CSA TYPE 3R, 4, 12, AND 13 COMPLIES WITH NEMA TYPE 3R, 4, 12, AND 13 IEC 60529, IP66
4. CONDUIT FITTING SIZE IS 1/2" NPT OR SIMILAR.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
1	8/16/18	DFA	KJM	MSAD	ADDED HOLE DIA DIM. AND NOTE 4.	GAECN05337
0	6/26/18	DFA	DPG	MSAD	INITIAL RELEASE	GAECN05302

PRODUCT SPEC		PACKAGING SPEC	
PART NUMBER		WORK INSTRUCTION	
VS - AVT - RBOX			
INSPECTION INSTRUCTION NUMBER		FMEA & CONTROL PLAN NUMBER	
TITLE			
VERISAFE RETROFIT BOX			
CUSTOMER DRAWING			
ITEM REVISION NAME		18Z111BW/01	
DATASET FILE NAME		18Z111BW_DC/01	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL :	
.x ± .1 [2.54] .xxx ± .005 [.127]		BOX: PAINTED STEEL EXPOSED VERISAFE IS NYLON AND POLYESTER	
.xx ± .01 [.25] ANGLES ± 5 °		DRAWING NUMBER:	
		18Z111BW_DC	
THIRD ANGLE PROJECTION			
DRAWN BY	DATE	CHK	SCALE
DFA	6/26/18	MSAD	NONE
SHT 1 OF 1			SIZE
			B