PANDUIT P/N	WEIGHT
P24D23M	7.9kg

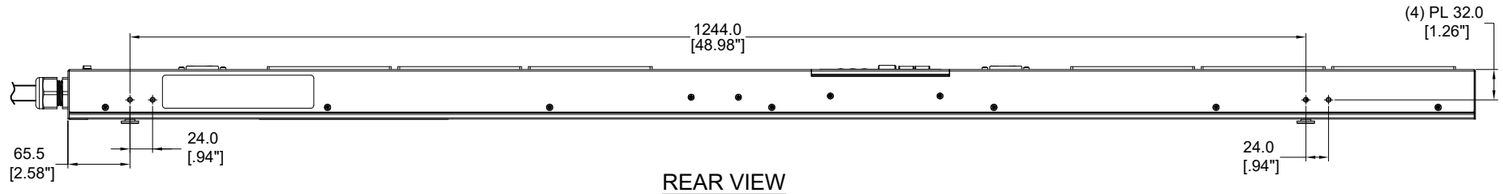

REAR VIEW

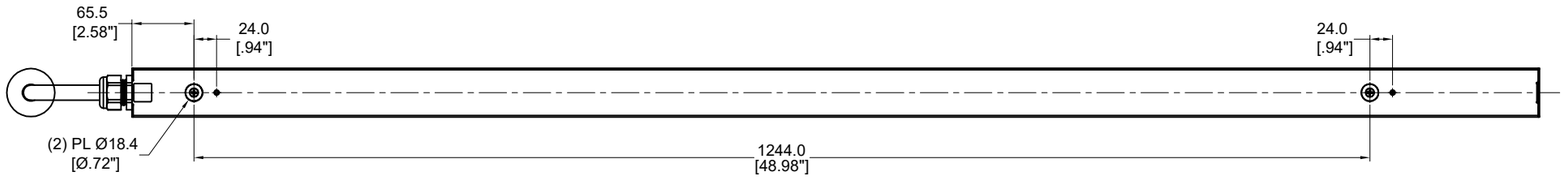

REAR VIEW

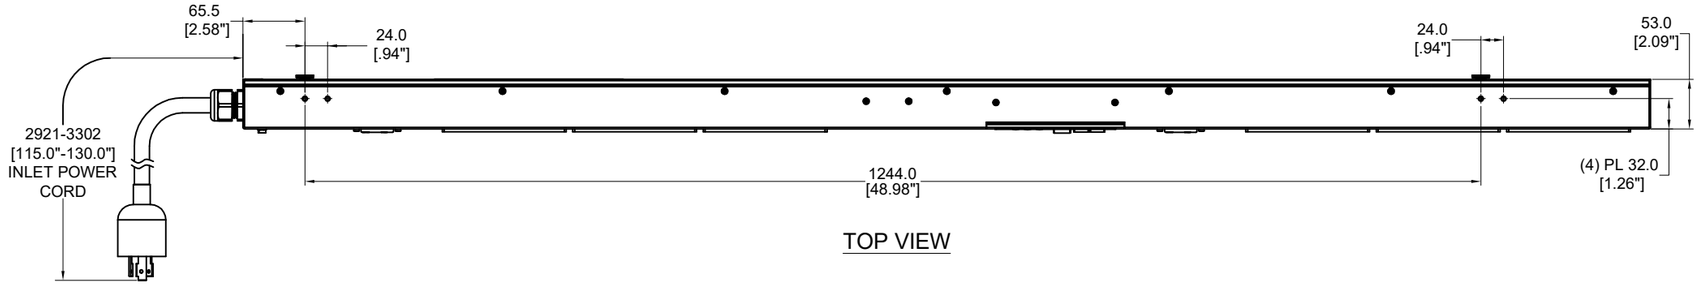

TOP VIEW

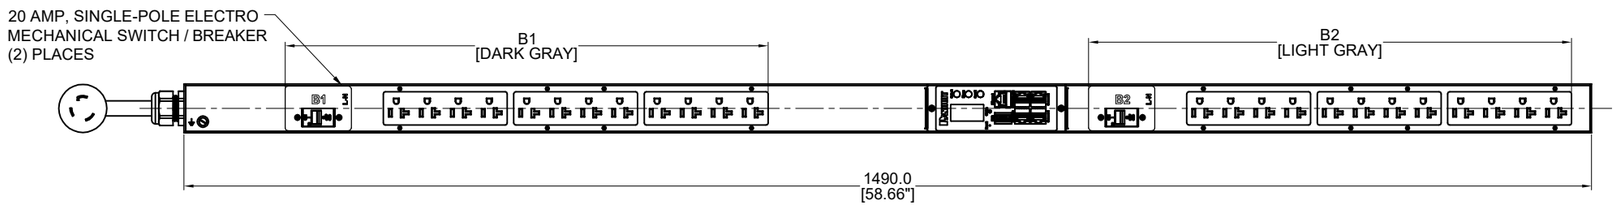

FRONT VIEW



SIDE VIEW

SPECIFICATION:

1. STANDARD

UNIT TYPE:	MONITORED INPUT
ORIENTATION:	VERTICAL, MID
OUTLET QTY & TYPE:	(24) 5-20R
INPUT VOLTAGE:	100-120VAC
INPUT CURRENT:	30A (24A DERATED)
BREAKER QTY & TYPE:	(2) 20AMP, SINGLE-POLE
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	2.9 kVA
INPUT PLUG:	NEMA L5-30P
INPUT POWER CORD:	3m [10'], TOP FEED
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:
   NONE
3. ACCESSORIES:
   POCKET GUIDE

NOTE:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL

IDENTIFICATION

PART NUMBER	DESCRIPTION
P24D23M	MI PDU, 24AMP, (24)5-20R, NEMA L5-30P-3M, BLACK



PLUG
NEMA L5 - 30P, 2P 3W
30A, 125V MAX RATED INPUT
24A DERATED

TWENTY-FOUR(24)
RECEPTACLES
NEMA 5 - 20R
16A, 125V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	05/27/2020	Leo	MIM	EDM	UPDATED THE DESCRIPTION & UPDATED THE COMPLIANCE LABEL	P24D23M
01A	07/17/2017	WSJ	MIM	EDM	INITIAL RELEASE	P24D23M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN
DATE
PRINT

TITLE
INTELLIGENT SERIES PDU
P24D23M
CUSTOMER DRAWING

ITEM REVISION NAME

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

THIRD ANGLE PROJECTION

Tolerance(mm)	
0<L≤50	±0.5
50<L≤250	±1.0
250<L≤500	±1.5
500<L≤1000	±2.5
1000<L≤2000	±4.0

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P24D23M_DC

DRAWN BY	DATE	CHK	SCALE		SCALE
WSJ	07/17/2017	SEAN	NONE	SHT 1 OF 1	B