





PANDUIT P/N	WEIGHT
P36D29M-XXYZ	SEE SHEET 2



FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P36D29M-XX Y Z

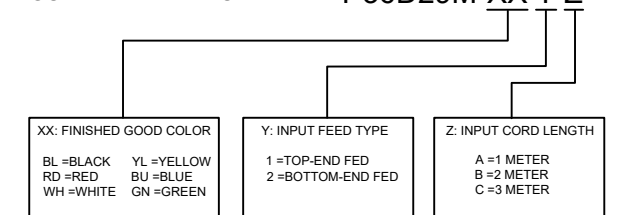

PLUG
CS8365, 3P 4W
50A, 250V, 3-PHASE MAX RATED INPUT
40A DERATED




RECEPTACLE
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLE
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

04A	06/11/2020	CWW	MIM	JAWI	UPDATED THE OUTLET DESIGN	P36D29M
03A	04/02/2020	Leo	MIM	JAWI	1. INPUT PLUG CS8365 WAS SHOWN CS8265	P36D29M
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36D29M
01A	07/27/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36D29M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P36D29M-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME:					
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]			MATERIAL/COLOR:		
 THIRD ANGLE PROJECTION			N/A		
Tolerance(mm) 04<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0			DRAWING NUMBER: P36D29M_DC		
DRAWN BY GEORGE	DATE 07/27/2017	CHK SEAN	SCALE NONE	SHT 1 OF 2	
				SCALE B	



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36D29M	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+ 10"/-5"]	7.9kg
P36D29M-BL1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+ 178MM/-89MM) 3.3' [+ 3.5"/-1.75"]	6.1kg
P36D29M-BL1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+ 178MM/-89MM) 6.5' [+ 7"/-3.5"]	7.0kg
P36D29M-RD1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+ 178MM/-89MM) 3.3' [+ 3.5"/-1.75"]	6.1kg
P36D29M-RD1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+ 178MM/-89MM) 6.5' [+ 7"/-3.5"]	7.0kg
P36D29M-RD1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+ 10"/-5"]	7.9kg
P36D29M-WH1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+ 178MM/-89MM) 3.3' [+ 3.5"/-1.75"]	6.1kg
P36D29M-WH1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+ 178MM/-89MM) 6.5' [+ 7"/-3.5"]	7.0kg
P36D29M-WH1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+ 10"/-5"]	7.9kg
P36D29M-YL1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+ 178MM/-89MM) 3.3' [+ 3.5"/-1.75"]	6.1kg
P36D29M-YL1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+ 178MM/-89MM) 6.5' [+ 7"/-3.5"]	7.0kg
P36D29M-YL1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+ 10"/-5"]	7.9kg
P36D29M-BU1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+ 178MM/-89MM) 3.3' [+ 3.5"/-1.75"]	6.1kg
P36D29M-BU1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+ 178MM/-89MM) 6.5' [+ 7"/-3.5"]	7.0kg
P36D29M-BU1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+ 10"/-5"]	7.9kg
P36D29M-GN1A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+ 178MM/-89MM) 3.3' [+ 3.5"/-1.75"]	6.1kg
P36D29M-GN1B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+ 178MM/-89MM) 6.5' [+ 7"/-3.5"]	7.0kg
P36D29M-GN1C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+ 10"/-5"]	7.9kg
P36D29M-BL2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+ 178MM/-89MM) 3.3' [+ 3.5"/-1.75"]	6.1kg
P36D29M-BL2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+ 178MM/-89MM) 6.5' [+ 7"/-3.5"]	7.0kg
P36D29M-BL2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+ 10"/-5"]	7.9kg
P36D29M-RD2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+ 178MM/-89MM) 3.3' [+ 3.5"/-1.75"]	6.1kg
P36D29M-RD2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+ 178MM/-89MM) 6.5' [+ 7"/-3.5"]	7.0kg
P36D29M-RD2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+ 10"/-5"]	7.9kg
P36D29M-WH2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+ 178MM/-89MM) 3.3' [+ 3.5"/-1.75"]	6.1kg
P36D29M-WH2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+ 178MM/-89MM) 6.5' [+ 7"/-3.5"]	7.0kg
P36D29M-WH2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+ 10"/-5"]	7.9kg
P36D29M-YL2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+ 178MM/-89MM) 3.3' [+ 3.5"/-1.75"]	6.1kg
P36D29M-YL2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+ 178MM/-89MM) 6.5' [+ 7"/-3.5"]	7.0kg
P36D29M-YL2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+ 10"/-5"]	7.9kg
P36D29M-BU2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+ 178MM/-89MM) 3.3' [+ 3.5"/-1.75"]	6.1kg
P36D29M-BU2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+ 178MM/-89MM) 6.5' [+ 7"/-3.5"]	7.0kg
P36D29M-BU2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+ 10"/-5"]	7.9kg
P36D29M-GN2A	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+ 178MM/-89MM) 3.3' [+ 3.5"/-1.75"]	6.1kg
P36D29M-GN2B	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+ 178MM/-89MM) 6.5' [+ 7"/-3.5"]	7.0kg
P36D29M-GN2C	VERTICAL,(30) C13,(6) C19,MONITORED INPUT, 200-240V/50A/3 PHASE DELTA , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+ 10"/-5"]	7.9kg

B



A

04A	06/11/2020	CWW	MIM	JAWI	UPDATED THE OUTLET DESIGN	P36D29M
03A	04/02/2020	Leo	MIM	JAWI	1. INPUT PLUG CS8365 WAS SHOWN CS8265	P36D29M
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36D29M
01A	07/27/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36D29M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN



WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P36D29M-XYZ CUSTOMER DRAWING			
ITEM REVISION NAME:			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A	
THIRD ANGLE PROJECTION		DRAWING NUMBER: P36D29M_DC	
DRAWN BY GEORGE	DATE 07/27/2017	CHK SEAN	SCALE NONE
SHT 2 OF 2			SCALE B

B



A