

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P24D24M-XYZ	SEE SHEET 2

SPECIFICATION:


1. STANDARD:	UNIT TYPE: MONITORED INPUT
	ORIENTATION: VERTICAL, MID
	OUTLET QTY & TYPE: (20) C13, (4) C19
	INPUT VOLTAGE: 100-240VAC
	INPUT CURRENT: 20A (16A DERATED)
	BREAKER QTY & TYPE: N/A
	INPUT PHASE: SINGLE-PHASE
	RATED POWER: 3.3 kVA
	INPUT PLUG: NEMA L6-20P
	INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
	REGULATORY STANDARD: RoHS COMPLIANT

2. ADDITIONAL:
NONE
3. ACCESSORIES:
(1) QUICK-START GUIDE


- NOTES:
1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
 2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
 3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
 4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
 5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P24D24M-XX Y Z

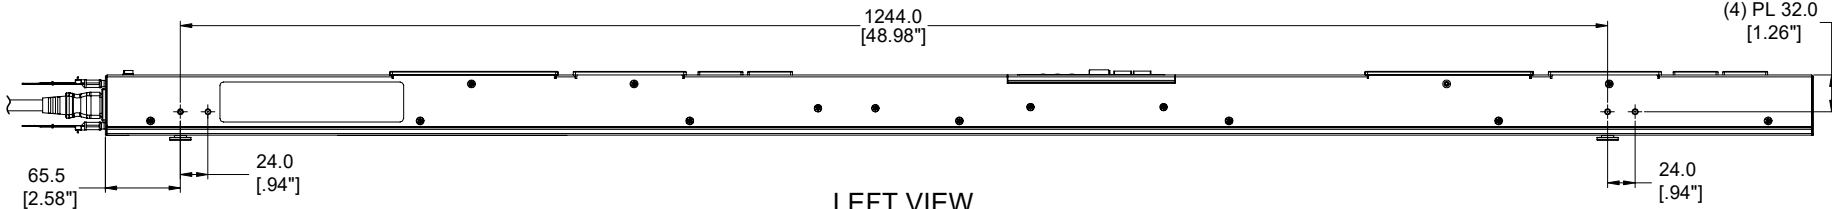


LEFT VIEW

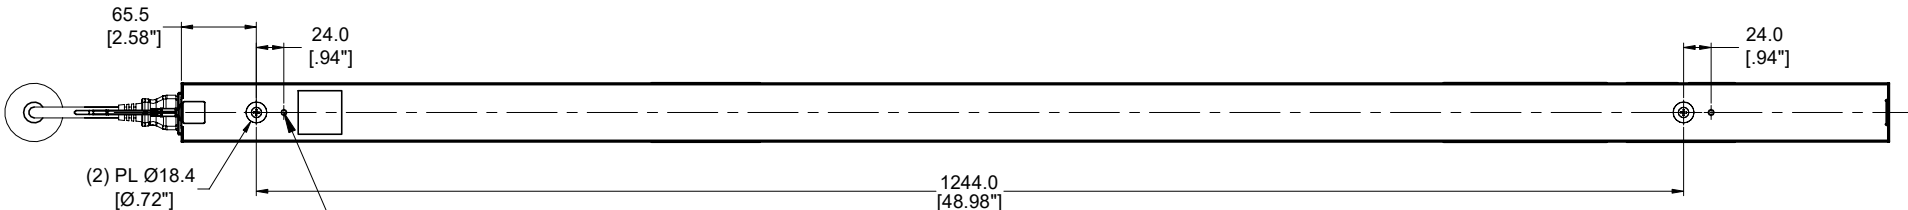


REAR VIEW

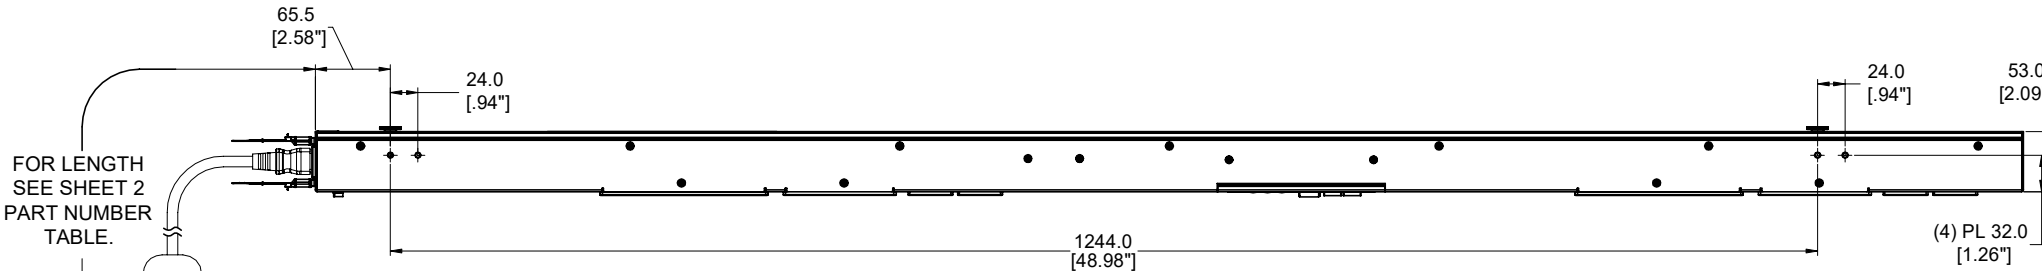

RIGHT VIEW

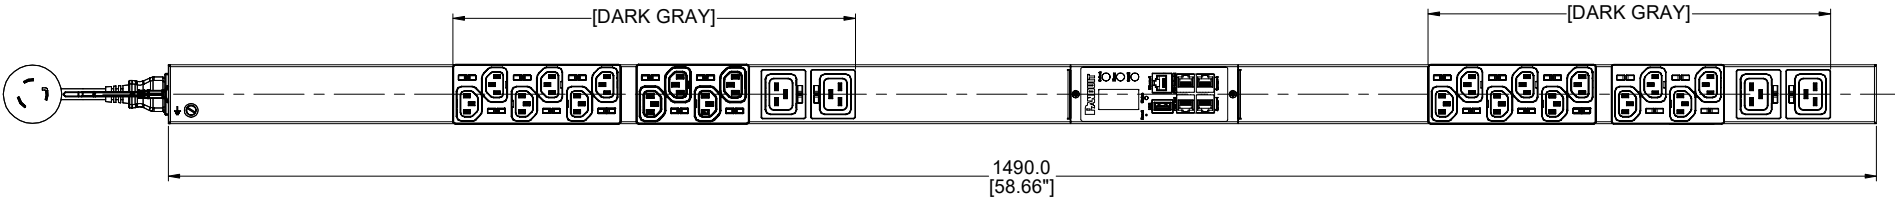

FRONT VIEW



BOTTOM VIEW

XX: FINISHED GOOD COLOR
BL=BLACK
RD=RED
WH=WHITE
YL=YELLOW
BU=BLUE
GN=GREEN

Y: INPUT FEED TYPE
1=TOP-END FED
2=BOTTOM-END FED

Z: INPUT CORD LENGTH
A=1 METER
B=2 METER
C=3 METER

PLUG/RECEPTACLE BLOCK



PLUG
NEMA L6 - 20P, 2P 3W
20A, 250V MAX RATED INPUT
16A DERATED



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	06/12/2020	LWB	MIM	JAWI	UPDATED THE OUTLET DESIGN	P24D24M
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION "DE-CODER"	P24D24M
01A	07/17/2017	WSJ	MIM	EDM	INITIAL RELEASE	P24D24M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE		INTELLIGENT SERIES PDU P24D24M-XYZ CUSTOMER DRAWING
ITEM REVISION NAME		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		
THIRD ANGLE PROJECTION		
Tolerance(mm)		
DRAWN BY		DATE
WSJ		07/17/2017
CHK		SEAN
SCALE		NONE
MATERIAL/COLOR:		N/A
DRAWING NUMBER:		P24D24M_DC
SHT 1 OF 2		SCALE B



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24D24M	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10'"/-5"]	7.2kg
P24D24M-BL1A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3' [+3.5'"/-1.75"]	6.6kg
P24D24M-BL1B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5' [+7'"/-3.5"]	6.9kg
P24D24M-RD1A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3' [+3.5'"/-1.75"]	6.6kg
P24D24M-RD1B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5' [+7'"/-3.5"]	6.9kg
P24D24M-RD1C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+10'"/-5"]	7.2kg
P24D24M-WH1A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3' [+3.5'"/-1.75"]	6.6kg
P24D24M-WH1B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5' [+7'"/-3.5"]	6.9kg
P24D24M-WH1C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+10'"/-5"]	7.2kg
P24D24M-YL1A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3' [+3.5'"/-1.75"]	6.6kg
P24D24M-YL1B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5' [+7'"/-3.5"]	6.9kg
P24D24M-YL1C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+10'"/-5"]	7.2kg
P24D24M-BU1A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3' [+3.5'"/-1.75"]	6.6kg
P24D24M-BU1B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5' [+7'"/-3.5"]	6.9kg
P24D24M-BU1C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+10'"/-5"]	7.2kg
P24D24M-GN1A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3' [+3.5'"/-1.75"]	6.6kg
P24D24M-GN1B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5' [+7'"/-3.5"]	6.9kg
P24D24M-GN1C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+10'"/-5"]	7.2kg
P24D24M-BL2A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3' [+3.5'"/-1.75"]	6.6kg
P24D24M-BL2B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5' [+7'"/-3.5"]	6.9kg
P24D24M-BL2C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10'"/-5"]	7.2kg
P24D24M-RD2A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3' [+3.5'"/-1.75"]	6.6kg
P24D24M-RD2B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5' [+7'"/-3.5"]	6.9kg
P24D24M-RD2C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+10'"/-5"]	7.2kg
P24D24M-WH2A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3' [+3.5'"/-1.75"]	6.6kg
P24D24M-WH2B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5' [+7'"/-3.5"]	6.9kg
P24D24M-WH2C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+10'"/-5"]	7.2kg
P24D24M-YL2A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3' [+3.5'"/-1.75"]	6.6kg
P24D24M-YL2B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5' [+7'"/-3.5"]	6.9kg
P24D24M-YL2C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+10'"/-5"]	7.2kg
P24D24M-BU2A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3' [+3.5'"/-1.75"]	6.6kg
P24D24M-BU2B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5' [+7'"/-3.5"]	6.9kg
P24D24M-BU2C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+10'"/-5"]	7.2kg
P24D24M-GN2A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3' [+3.5'"/-1.75"]	6.6kg
P24D24M-GN2B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5' [+7'"/-3.5"]	6.9kg
P24D24M-GN2C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT, 100-240V/20A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+10'"/-5"]	7.2kg

B

B

A

A

03A	06/12/2020	LWB	MIM	JAWI	UPDATED THE OUTLET DESIGN	P24D24M
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO I NCLUDE CONFIGURABLE OPTION 'DE-CODER'	P24D24M
01A	07/17/2017	WSJ	MIM	EDM	INITIAL RELEASE	P24D24M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P24D24M-XXYZ CUSTOMER DRAWING		
ITEM REVISION NAME		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		
THIRD ANGLE PROJECTION		MATERIAL/COLOR: N/A
Tolerance(mm) 04<50 ±0.5 504<250 ±1.0 2504<500 ±1.5 5004<1000 ±2.5 10004<2000 ±4.0		DRAWING NUMBER: P24D24M_DC
DRAWN BY WSJ	DATE 07/17/2017	CHK SEAN
SCALE NONE		SHT 2 OF 2
		SCALE B

