

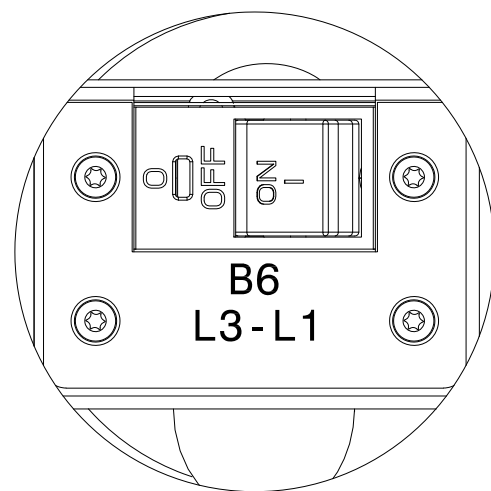
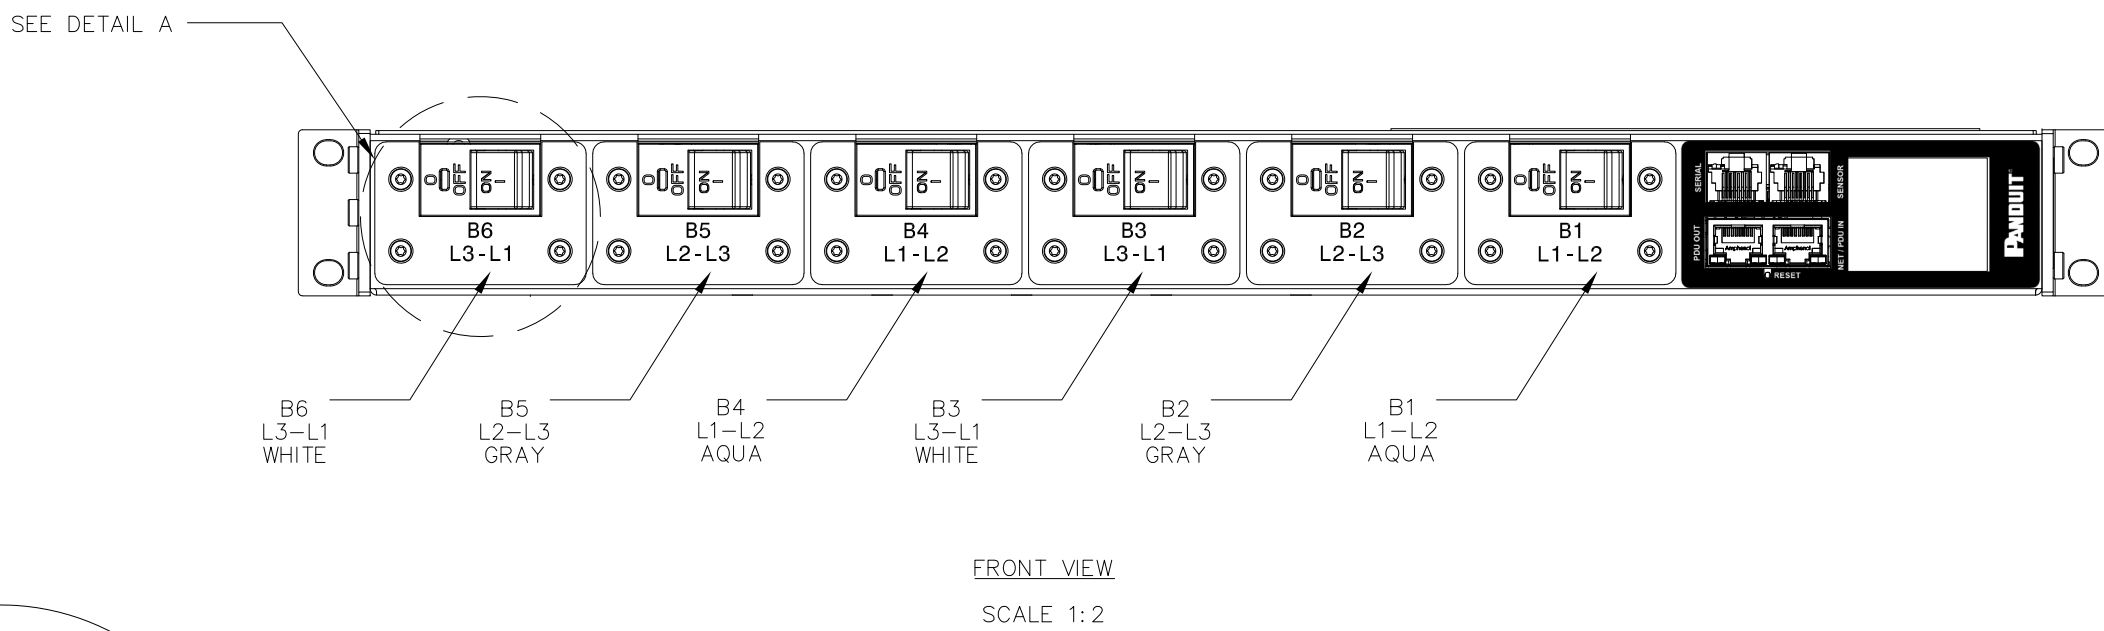
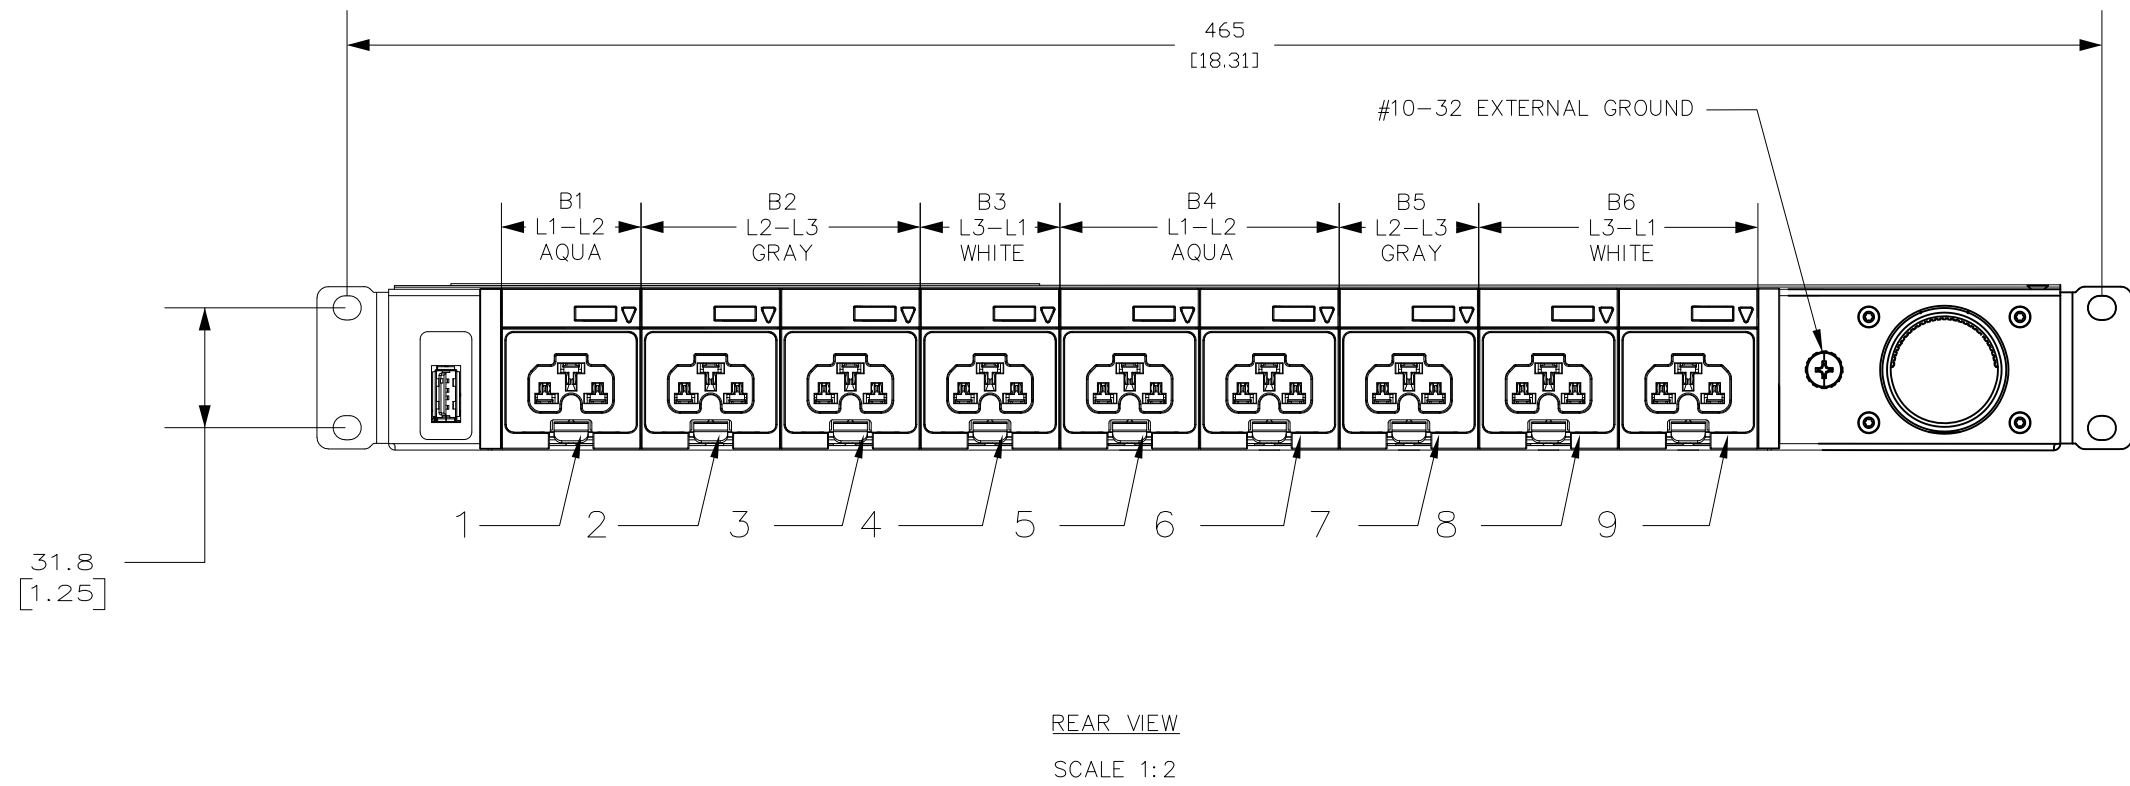
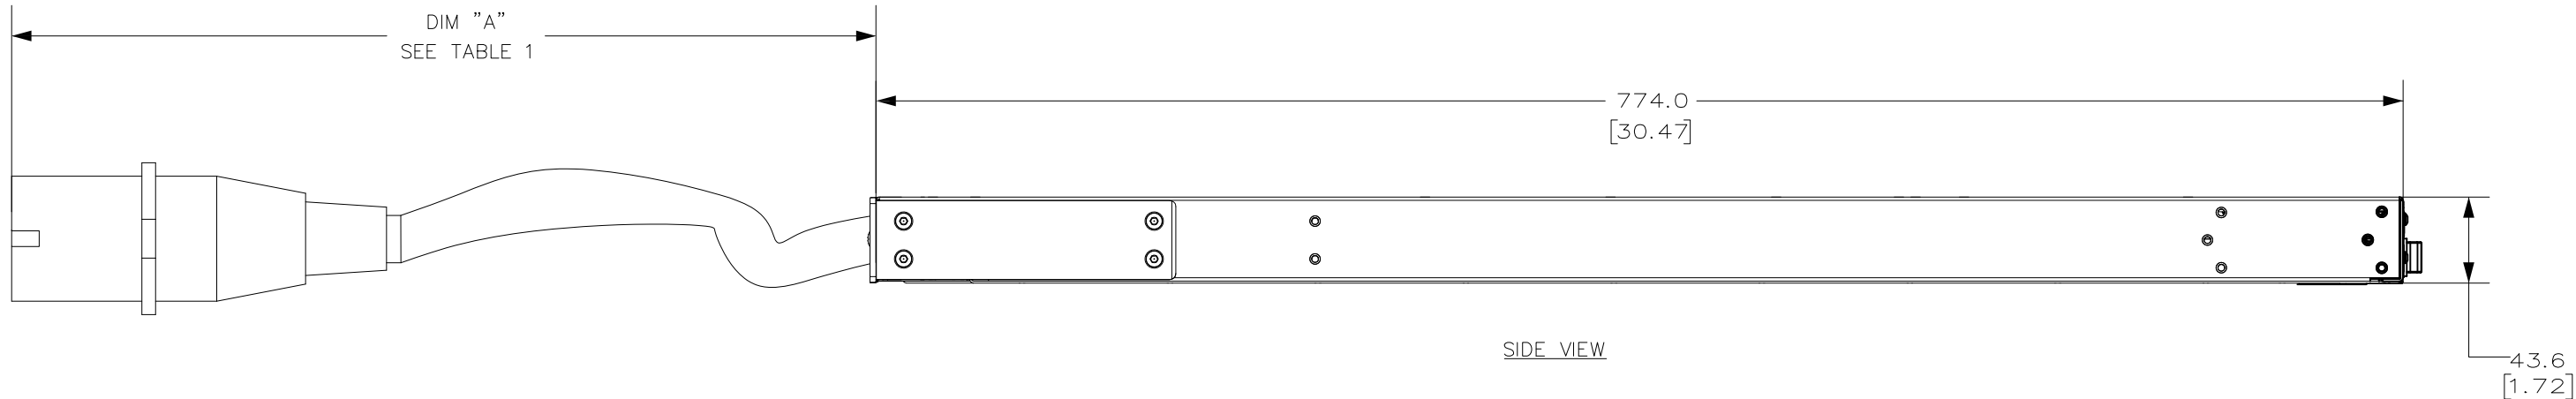


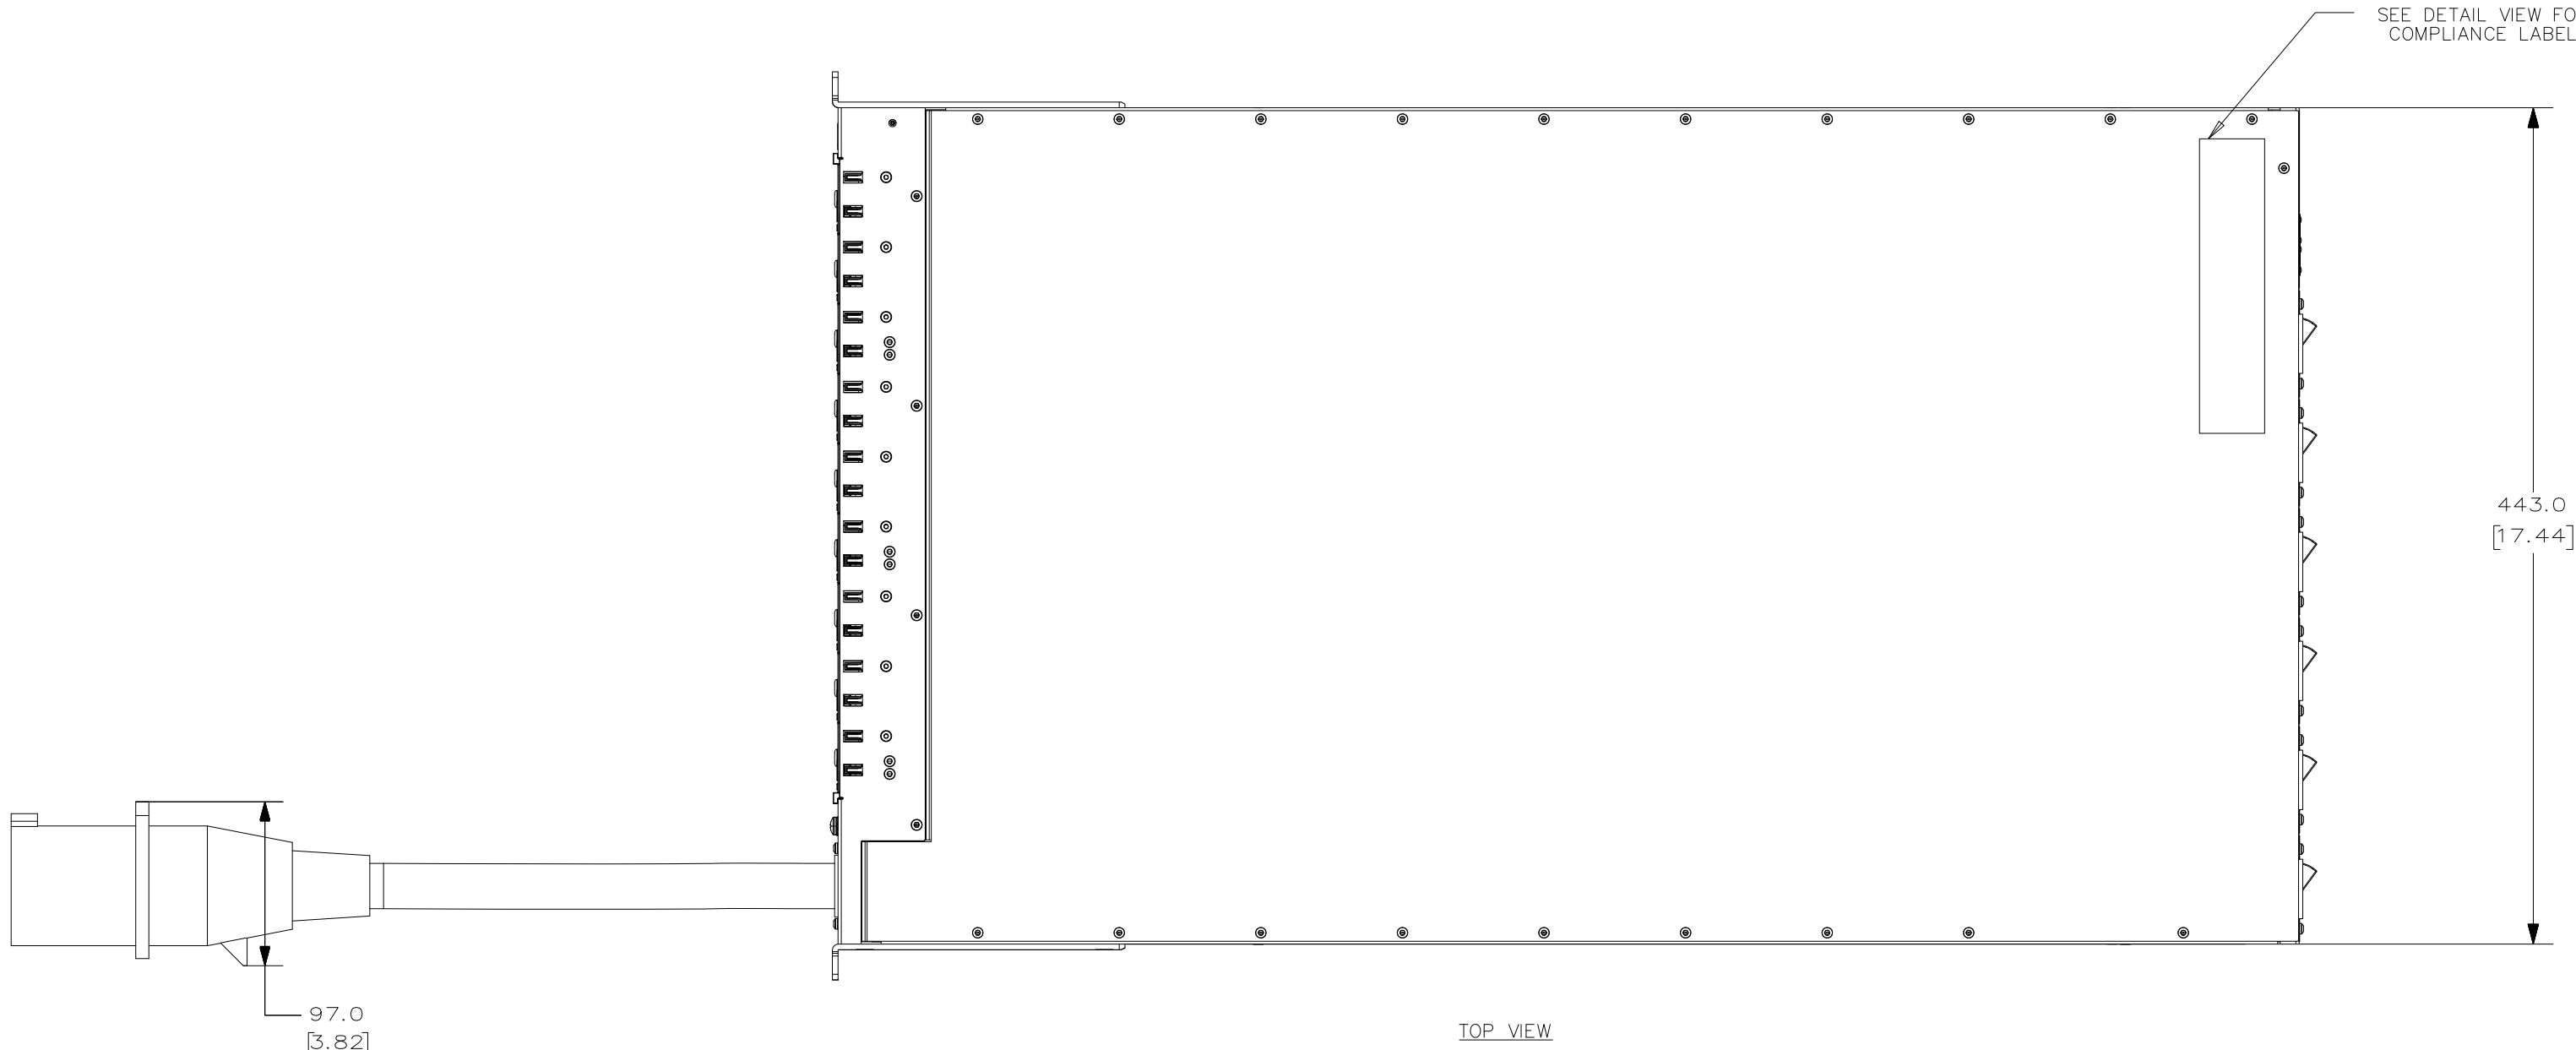

INPUT PLUG FRONT VIEW

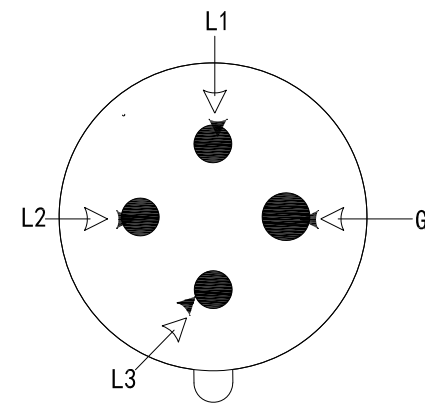

COMPLIANCE LABEL VIEW

PANDUIT
18900 Panduit Drive, 60487, USA
www.panduit.com

Power Distribution Unit / Unidad de distribución de Energía

Model/Modelo: S2-GD048DV
Input/Entrada: 200-240VAC, DELTA, 3Ø, 50/60Hz, 48A
Output per Outlet/Salida por Receptáculo:
C19; 200-240VAC, 16A per outlet
48A Total

CAN ICES-003(A)/NMB-003(A)
Exclusivo para uso interior.
Prohibido su uso en exteriores.
No modificar ni reparar.
Revisarla periódicamente.
Desconectarla cuando no se utilice.
No sobrepasar la corriente indicada.
Conectar la clavija totalmente.

UPC: XXXXXXXXXX
SKU: E09G01L

SN: XXXXXXXXXX
MAC: XXXXXXXXXX

Made in / Hecho en TAIWAN

SPECIFICATION

- STANDARD:
 - UNIT TYPE: MSPO
 - ORIENTATION: HORIZONTAL, 1U
 - OUTLET QTY & TYPE: (9)C13/C15/C19/C21
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 60A (48A DERATED)
 - BREAKER QTY & TYPE: (6) 20AMP, DOUBLE-POLE
 - INPUT PHASE: THREE-PHASE DELTA, L-L
 - RATED POWER: 17.3VA
 - INPUT PLUG: IEC 60309 3P+E 9H 60A(IP44)
- ADDITIONAL:
 - CORD TYPE: 4W 6AWG 500W
- ACCESSORIES:
 - MOUNTING BRACKET HARDWARE KIT
 - PRODUCT SAFETY WARNING SHEET

NOTES

- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E09G01L	EL2P MSPO PDU, 60 AMP, (9)C13/C15/C19/C21, IEC 60309 3P+E 9H 60A(IP44)	3000 +178/-89 [118.1 +7/-3.5]	BLACK (RAL 9005)	TBD

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	08/04/2025	CHF	CSH	MJD	RELEASE FOR DV BUILD	E09G01L

TITLE		CUSTOMER DRAWING	
E09G01L		E09G01L-00	
ITEM REVISION NAME		E09G01L-DC/00A	
DATABASE FILE NAME		E09G01L-DC/00A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]		NOT APPLICABLE	
THIRD ANGLE PROJECTION		DRAWING NUMBER: E09G01L-DC	
DRAWN BY DATE	CHF 08/04/2025	CHK	CSH
SCALE	3:10	SHT	1 OF 1
SIZE	D		