
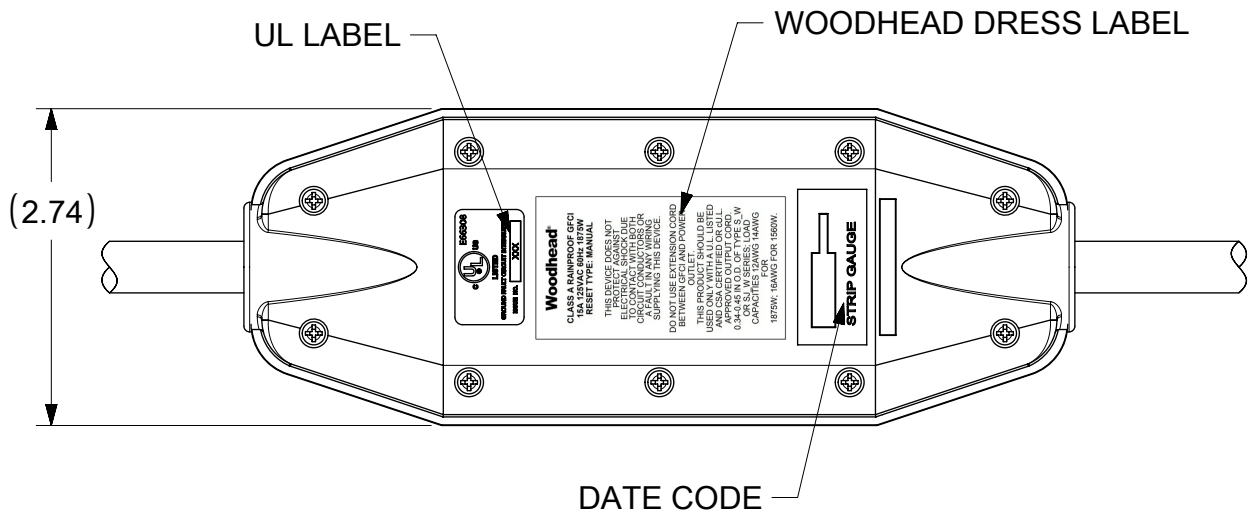
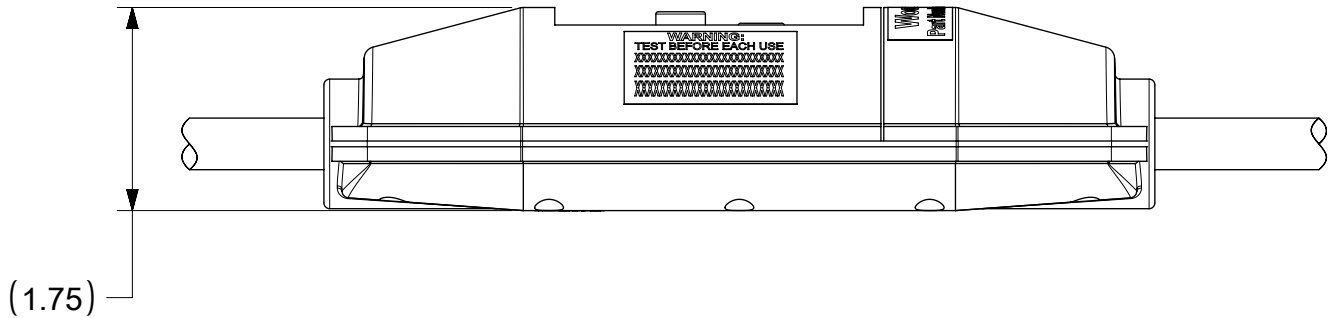


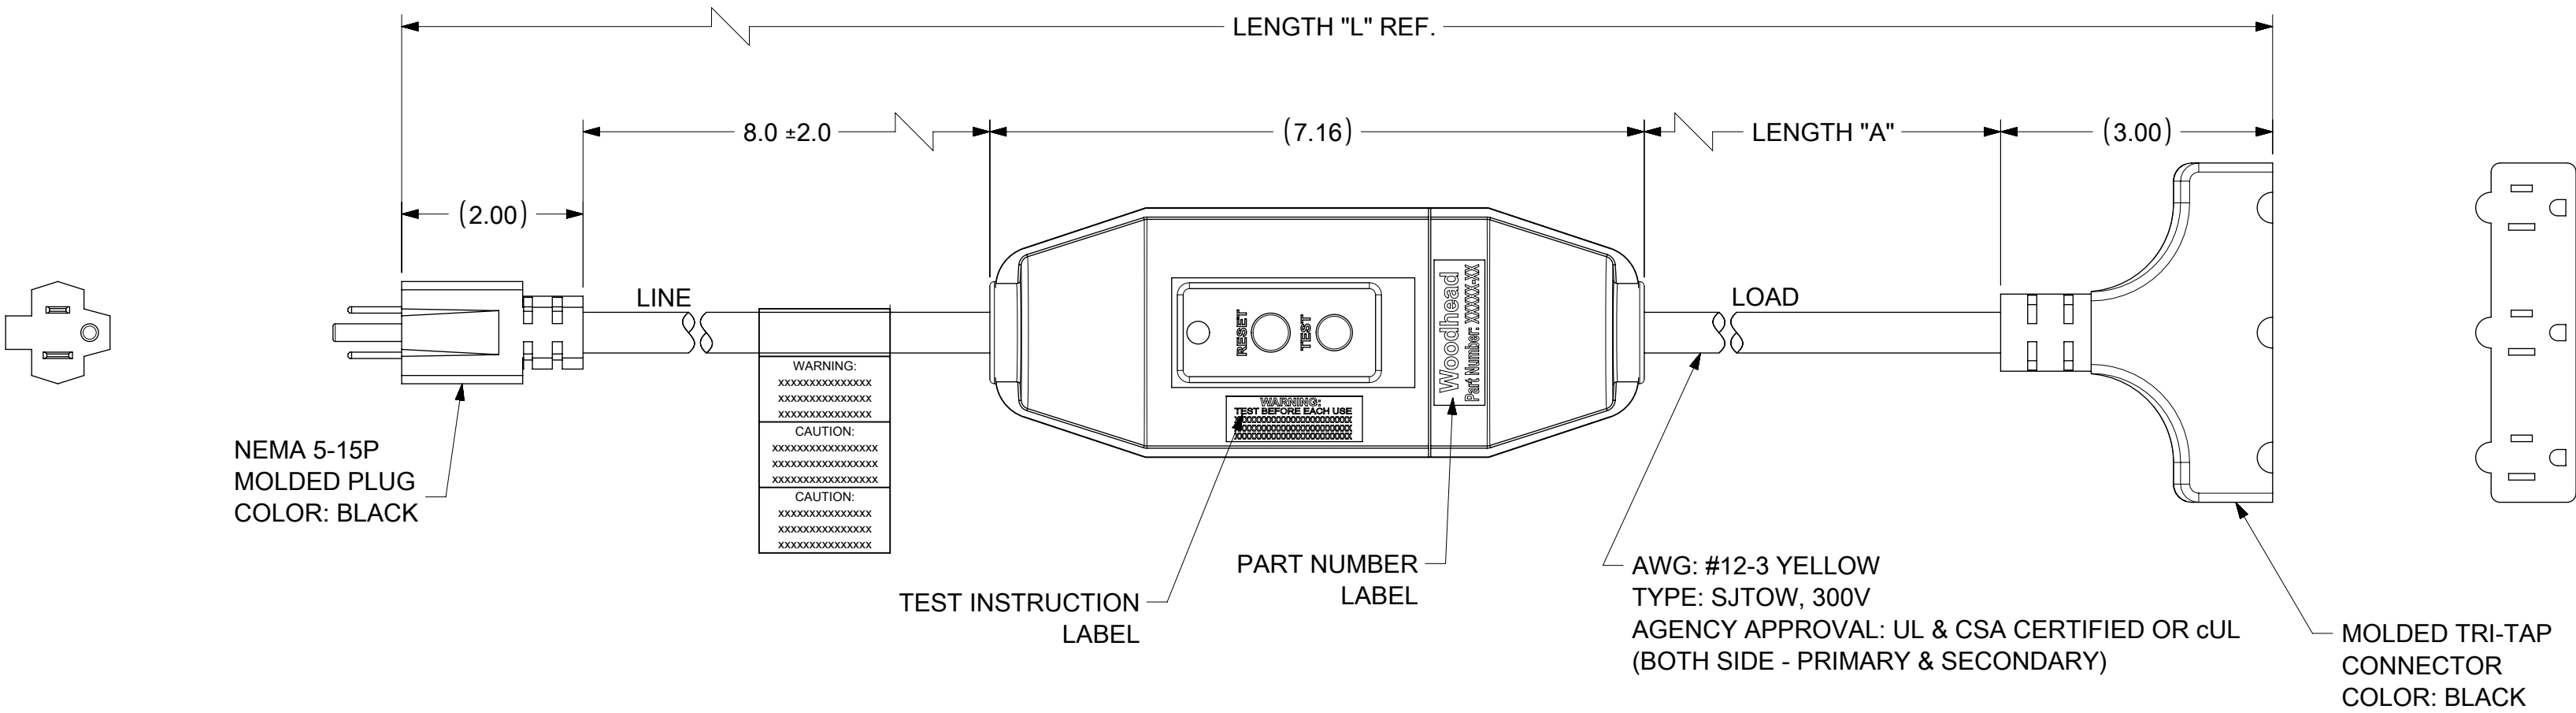

TECHNICAL

LISTED:	UL & CSA
RATED SUPPLY VOLTAGE:	120VAC
RATED CURRENT:	UP TO 15 AMPS
RESET TYPE:	AUTO OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
OVERLOAD CURRENT:	90 AMPS, 0.45 PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 3R

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530029	15050-3TTA	2 FT 8 IN	1 FT ± 1 IN	AUTO
1301530040	15050-6TTA	7 FT 8 IN	6 FT ± 2 IN	AUTO
1301530026	15050-25TTA	26 FT 8 IN	25 FT ± 2 IN	AUTO
1301530034	15050-50TTA	51 FT 8 IN	50 FT ± 4 IN	AUTO
1301530030	15050-1TTM	2 FT 8 IN	1 FT ± 1 IN	MANUAL
1301530041	15050-6TTM	7 FT 8 IN	6 FT ± 2 IN	MANUAL
1301530027	15050-25TTM	26 FT 8 IN	25 FT ± 2 IN	MANUAL
1301530035	15050-50TTM	51 FT 8 IN	50 FT ± 4 IN	MANUAL

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW SALES DRAWING CREATED			molex		
	INCH		NTS							
	GENERAL TOLERANCES (UNLESS SPECIFIED)							EC NO: 679783		
	ANGULAR TOL ± 0.5 °				DRWN: VBASUTHKARP 2021/10/05					
4 PLACES		±		CHK'D: DNGUYEN62 2021/10/05						
3 PLACES		±					APPR: HKNEELAND 2021/10/11			
2 PLACES		±		INITIAL REVISION:						DOCUMENT NUMBER 1301530029
1 PLACE		±					DRWN: VBASUTHKARP 2021/09/30			
0 PLACES		±		APPR: HKNEELAND 2021/10/11						PSD
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION					DRAWING	SERIES	MATERIAL NUMBER	
				C-SIZE	130153	SEE TABLE		GENERAL MARKET		1 OF 1

6



5

4

3

2

1

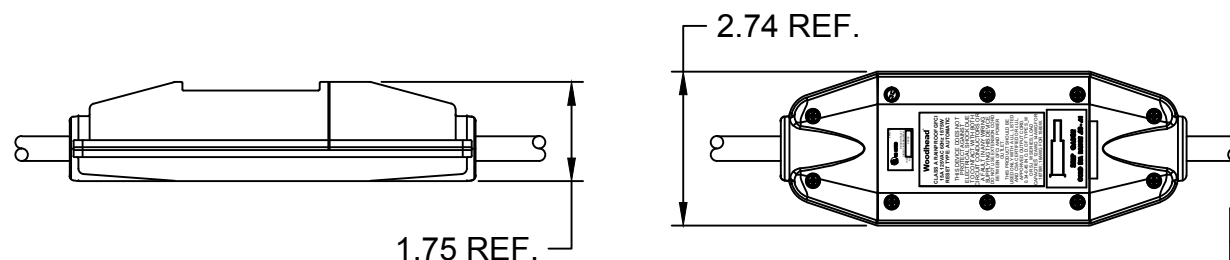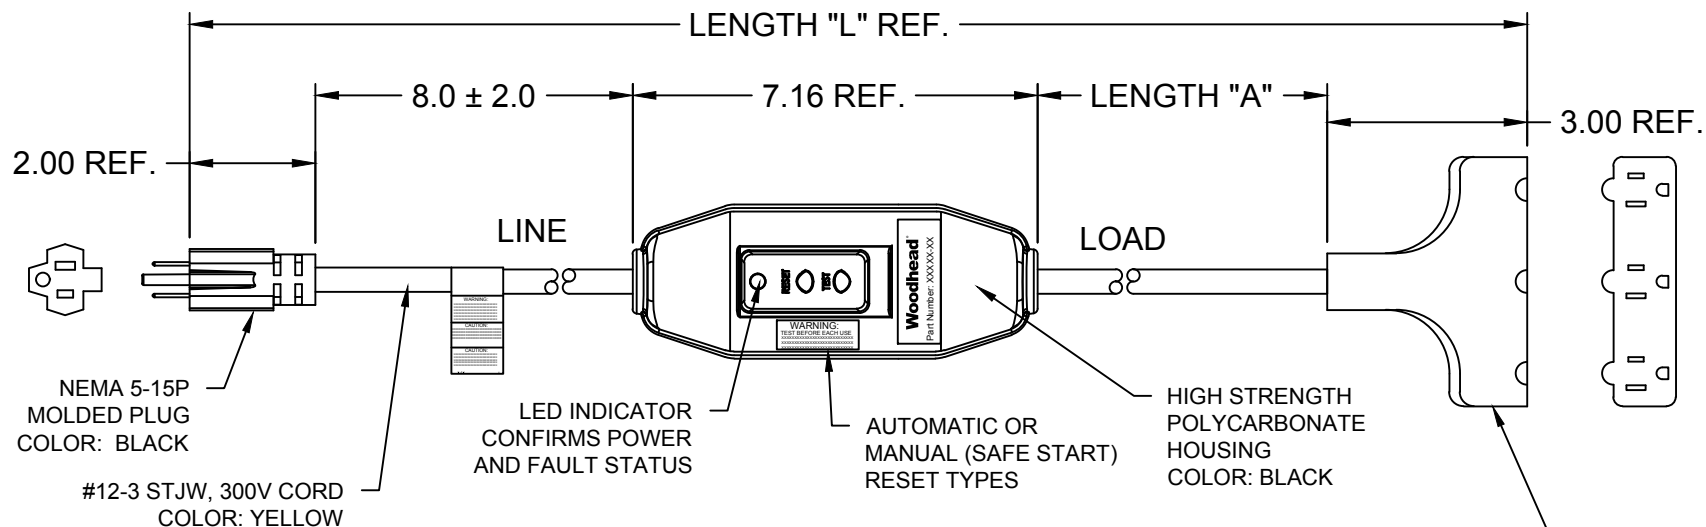

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530029	15050-3TTA	2 FT 8 IN	1 FT ± 1 IN	AUTO
1301530040	15050-6TTA	7 FT 8 IN	6 FT ± 2 IN	AUTO
1301530026	15050-25TTA	26 FT 8 IN	25 FT ± 2 IN	AUTO
1301530034	15050-50TTA	51 FT 8 IN	50 FT ± 4 IN	AUTO
1301530030	15050-1TTM	2 FT 8 IN	1 FT ± 1 IN	MANUAL
1301530041	15050-6TTM	7 FT 8 IN	6 FT ± 2 IN	MANUAL
1301530027	15050-25TTM	26 FT 8 IN	25 FT ± 2 IN	MANUAL
1301530035	15050-50TTM	51 FT 8 IN	50 FT ± 4 IN	MANUAL

TECHNICAL:**LISTED:**

RATED SUPPLY VOLTAGE:

RATED CURRENT:

RESET TYPE:

OPERATING FREQUENCY:

TYPE:

GROUND TRIP CURRENT:

OVERLOAD CURRENT:

INSULATION VOLTAGE:

ENDURANCE OPERATIONS:

UL AND cUL

120 VAC

UP TO 15 AMPS OR CABLE RATING

AUTOMATIC OR MANUAL

60 Hz

CLASS A

4-6 mA

90 AMP 125 VAC

1,500 VRMS – 1 MINUTE

3000 OPERATIONS

INITIAL RELEASE EC NO: IPG2013-1078 DRWN: HRUIZ01 2013/02/06 CHK'D: HKNEELAN 2014/07/22 APPR: JFMURPHY 2015/04/20	DESCRIPTION	QUALITY SYMBOLS =0 =0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE INCH		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY DATE	TITLE 120V 15A INLINE GFCI W/ TRIPLE TAP CONNECTOR NEMA 5-15				
			4 PLACES	±---	±---	HRUIZ01 2013/02/06					
			3 PLACES	±---	±.005	CHECKED BY DATE					
			2 PLACES	±0.13	±.010	HKNEELAN 2014/07/22	MOLEX INCORPORATED				
	1 PLACE	±0.25	±.020	APPROVED BY DATE							
	ANGULAR ±1/2°			JFMURPHY 2015/04/20	SD-130153-014						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.						DOCUMENT NO.	
				SEE TABLE		SD-130153-014		1 OF 1			
				SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						