



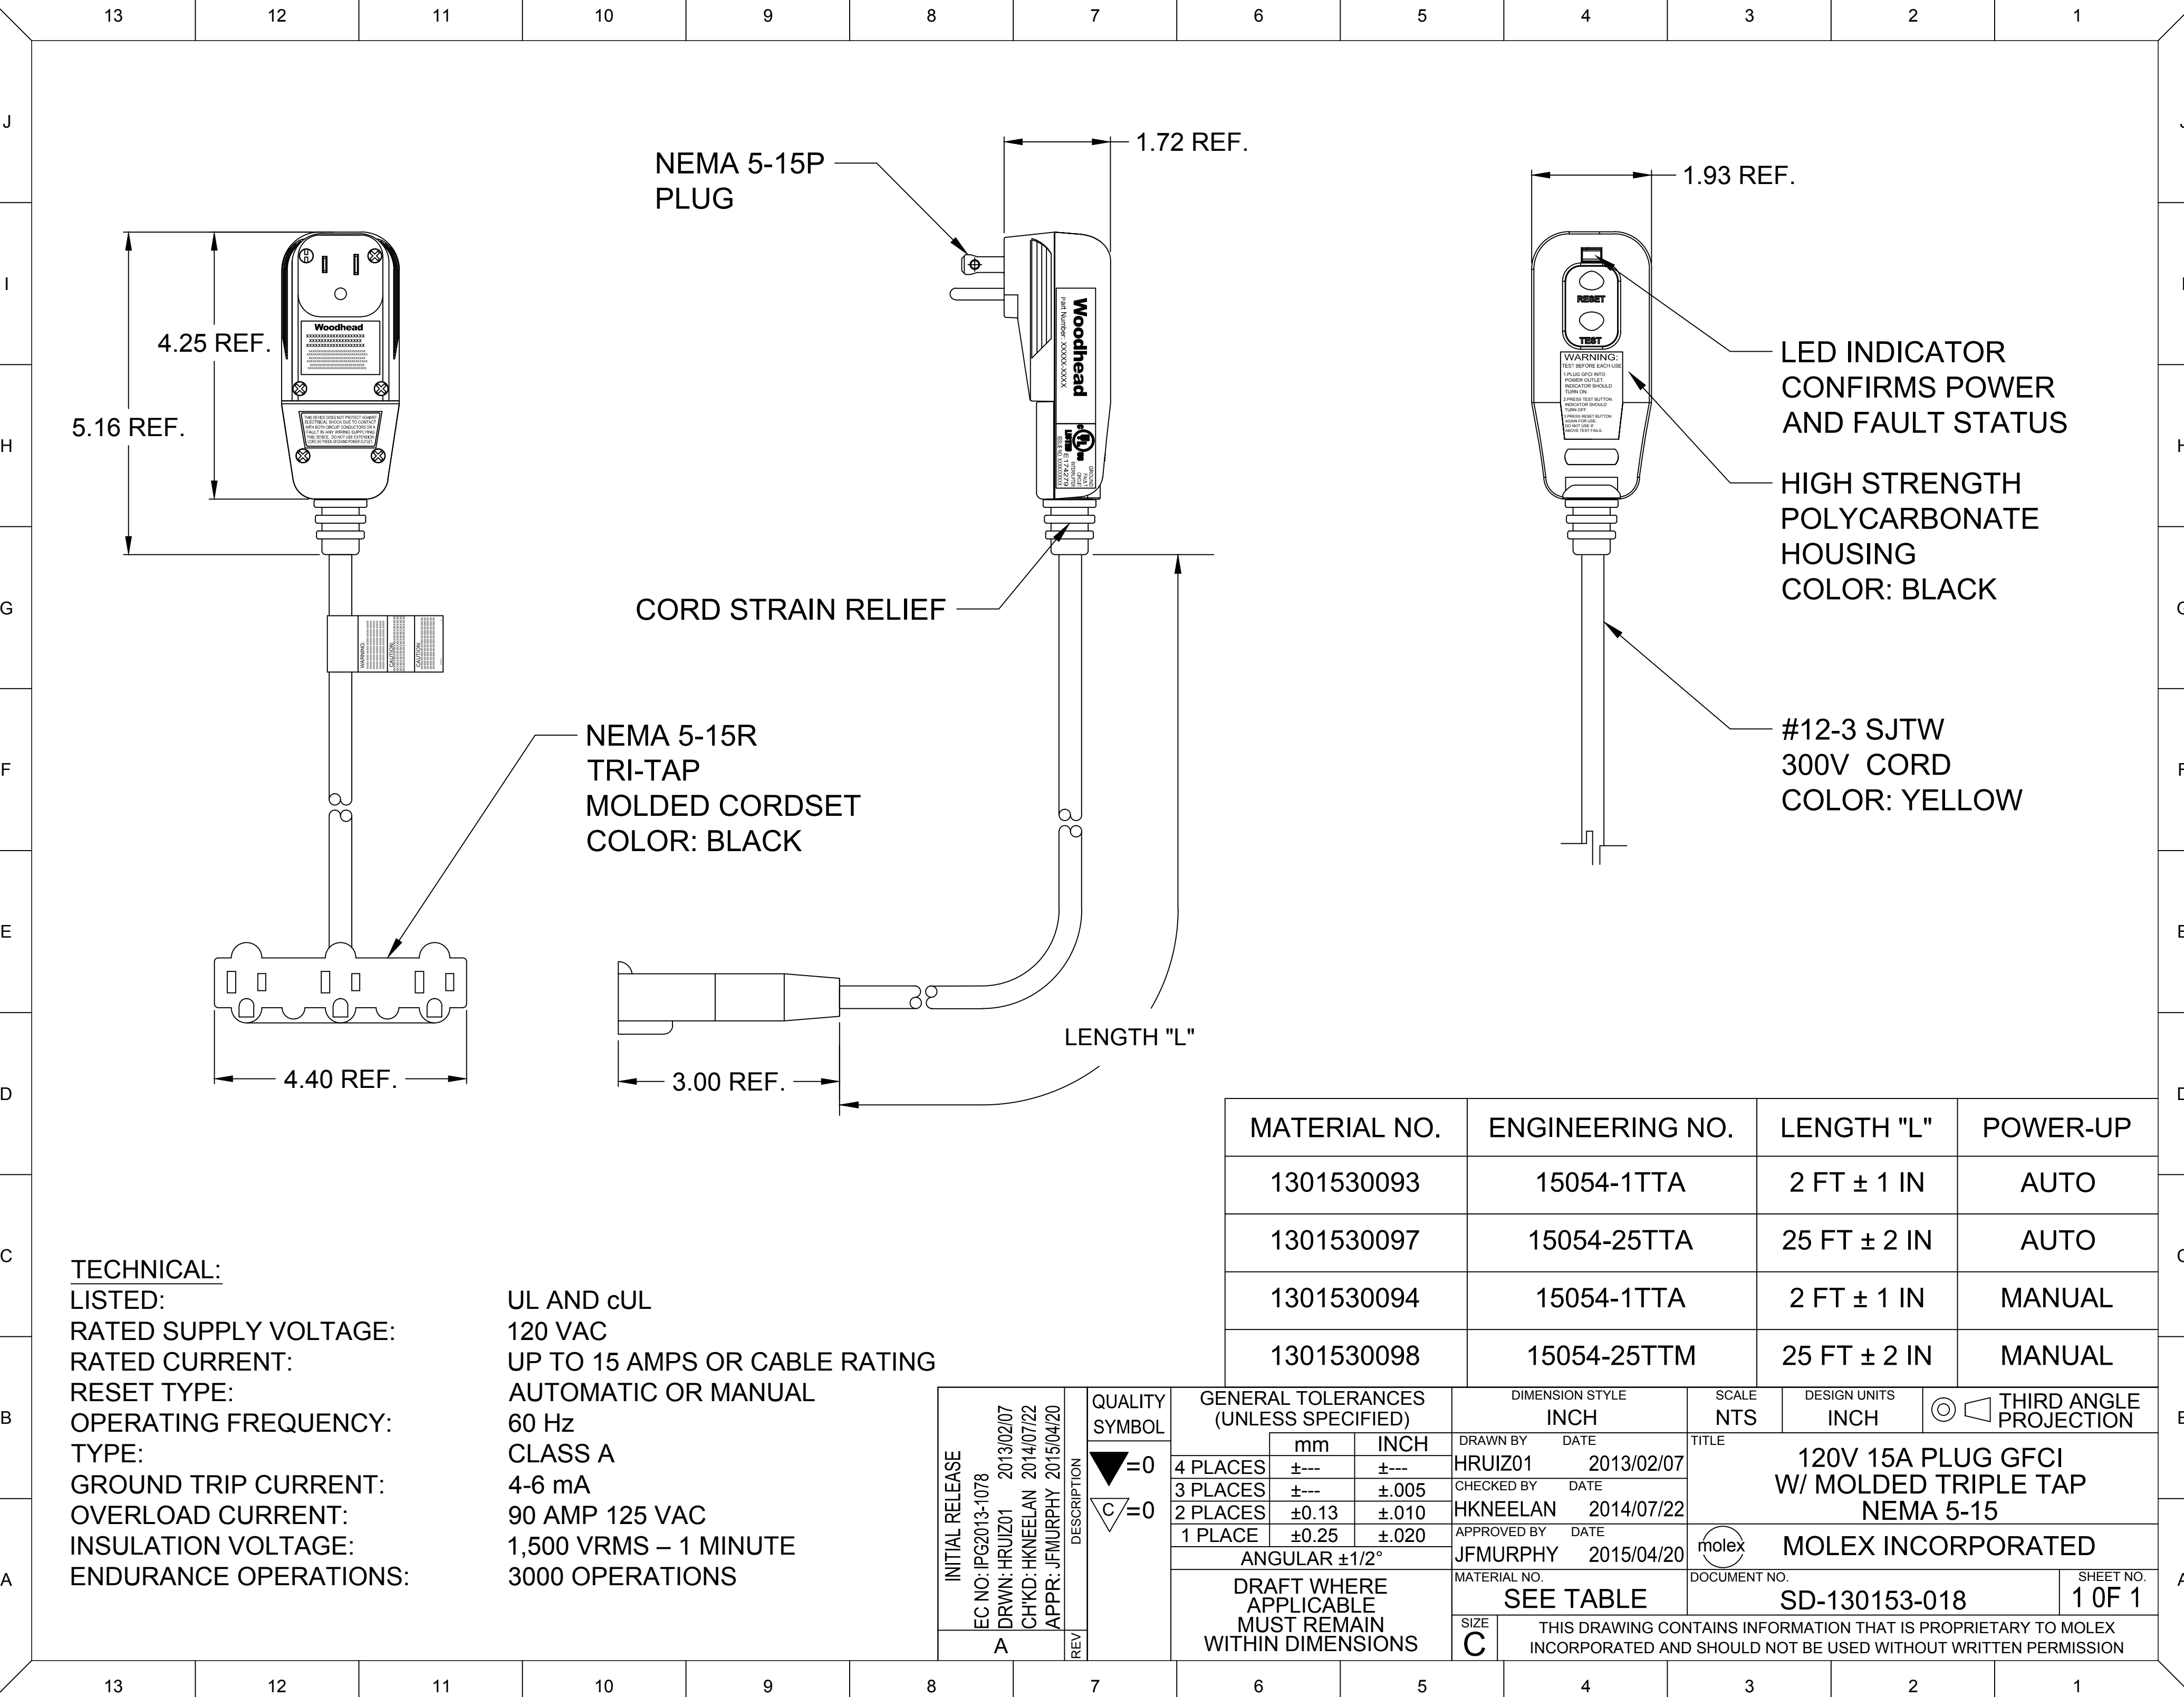


NEMA 5-15P
PLUG

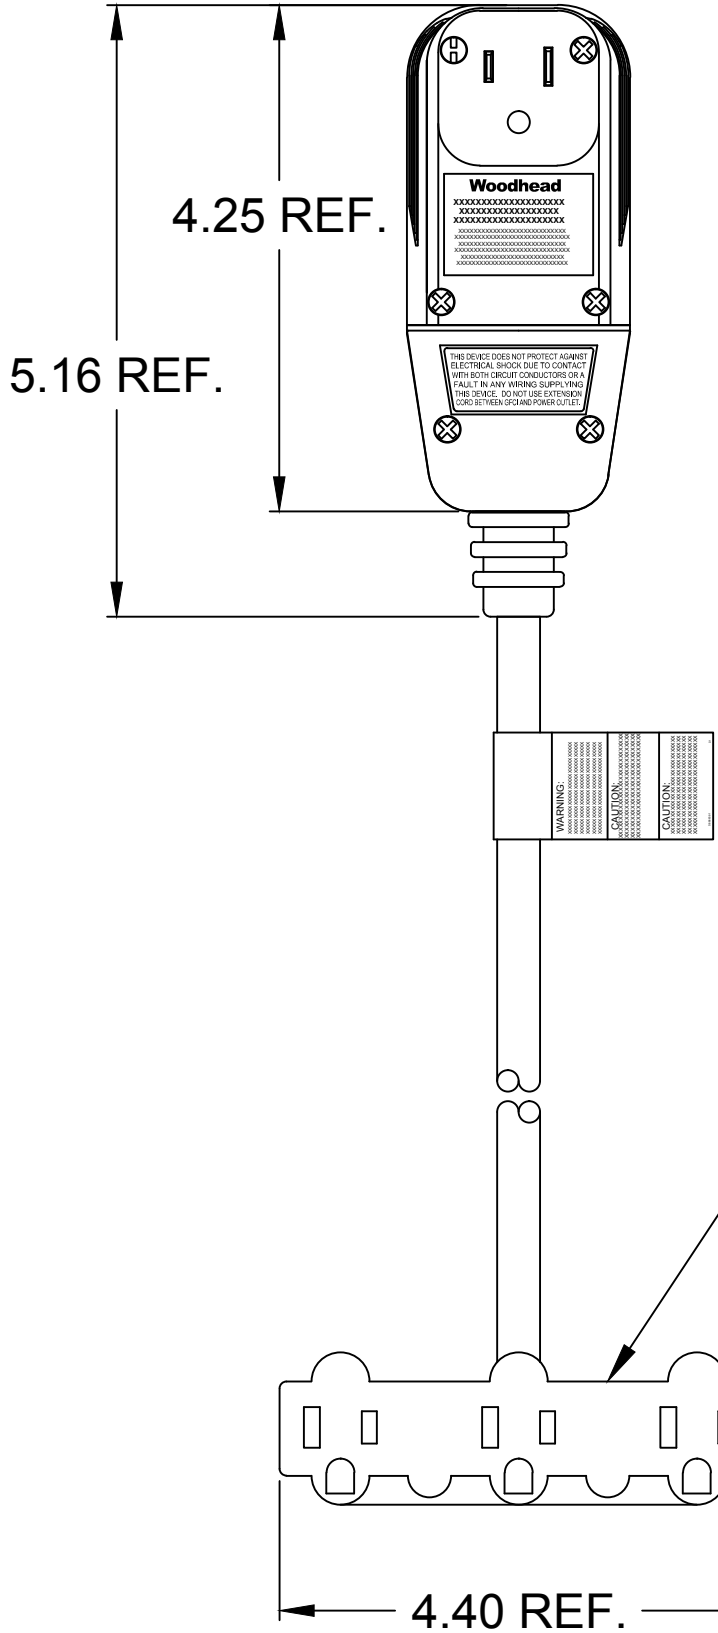

NEMA 5-15R
TRI-TAP
MOLDED CORDSET
COLOR: BLACK

CORD STRAIN RELIEF

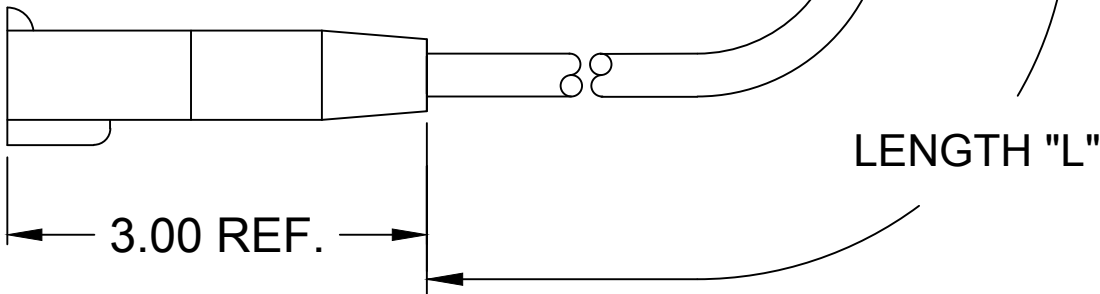

LENGTH "L"

1.72 REF.

1.93 REF.

LED INDICATOR
CONFIRMS POWER
AND FAULT STATUS

HIGH STRENGTH
POLYCARBONATE
HOUSING
COLOR: BLACK


#12-3 SJTW
300V CORD
COLOR: YELLOW

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	POWER-UP
1301530093	15054-1TTA	2 FT ± 1 IN	AUTO
1301530097	15054-25TTA	25 FT ± 2 IN	AUTO
1301530094	15054-1TTA	2 FT ± 1 IN	MANUAL
1301530098	15054-25TTM	25 FT ± 2 IN	MANUAL

TECHNICAL:

LISTED:
RATED SUPPLY VOLTAGE:
RATED CURRENT:
RESET TYPE:
OPERATING FREQUENCY:
TYPE:
GROUND TRIP CURRENT:
OVERLOAD CURRENT:
INSULATION VOLTAGE:
ENDURANCE OPERATIONS:

UL AND cUL
120 VAC
UP TO 15 AMPS OR CABLE RATING
AUTOMATIC OR MANUAL
60 Hz
CLASS A
4-6 mA
90 AMP 125 VAC
1,500 VRMS – 1 MINUTE
3000 OPERATIONS

INITIAL RELEASE EC NO: IPG2013-1078 DRWN: HRUIZ01 2013/02/07 CHKD: HKNEELAN 2014/07/22 APPR: JFMURPHY 2015/04/20	DESCRIPTION	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE INCH		SCALE NTS	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION					
				mm	INCH	DRAWN BY HRUIZ01	DATE 2013/02/07	TITLE 120V 15A PLUG GFCI W/ MOLDED TRIPLE TAP NEMA 5-15							
			4 PLACES	±---	±---	CHECKED BY HKNEELAN	DATE 2014/07/22								
			3 PLACES	±---	±.005	APPROVED BY JFMURPHY	DATE 2015/04/20	 MOLEX INCORPORATED							
			2 PLACES	±0.13	±.010	MATERIAL NO. SEE TABLE						DOCUMENT NO. SD-130153-018		SHEET NO. 1 OF 1	
			1 PLACE	±0.25	±.020										
			ANGULAR ±1/2°												
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS												
REV			SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												