
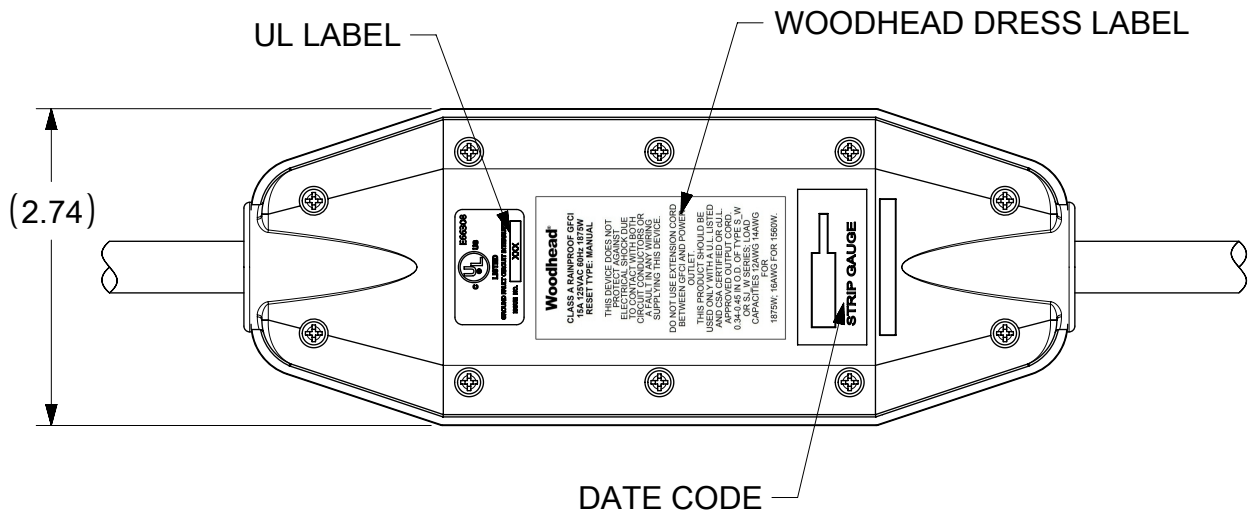
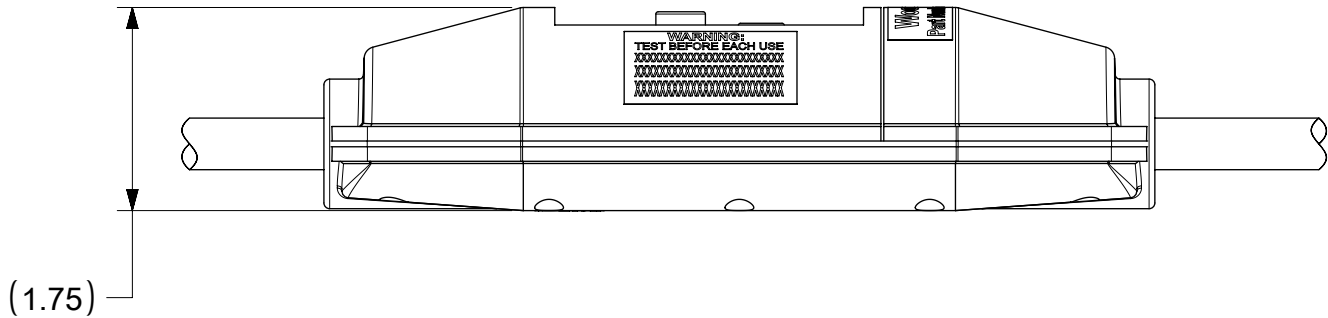


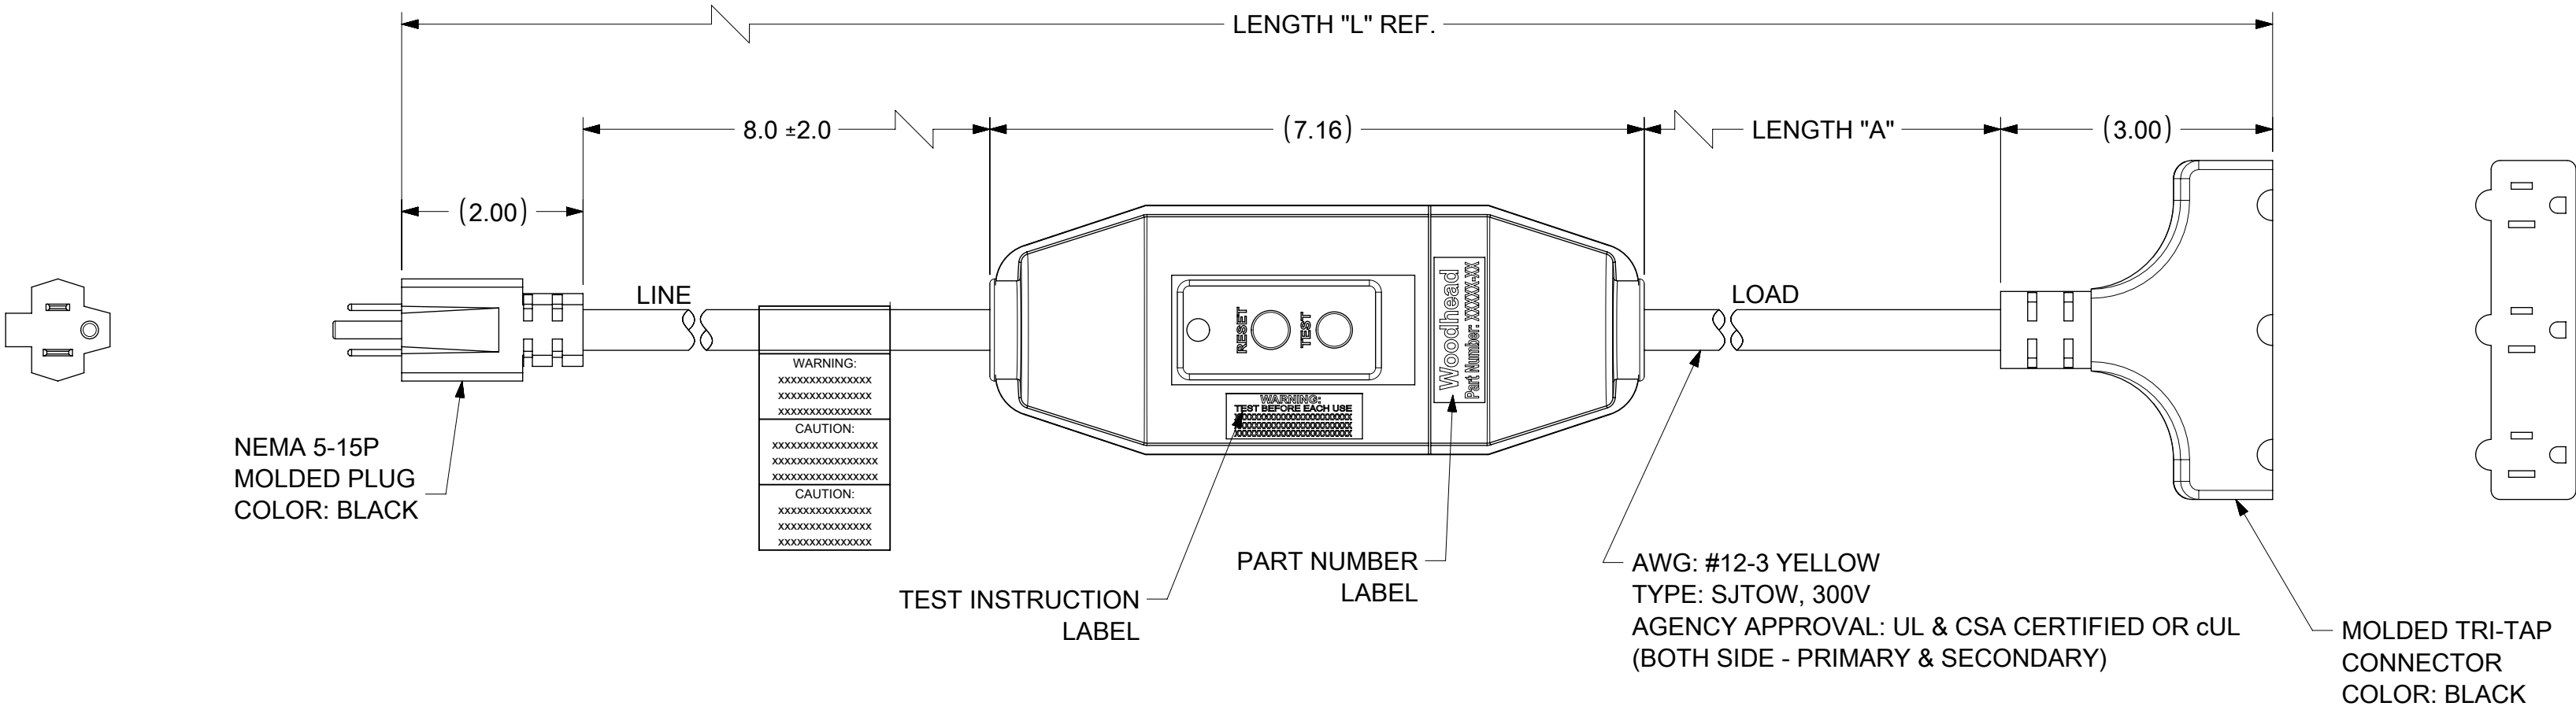

TECHNICAL

LISTED:	UL & CSA
RATED SUPPLY VOLTAGE:	120VAC
RATED CURRENT:	UP TO 15 AMPS
RESET TYPE:	AUTO OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	5mA +/- 1mA
OVERLOAD CURRENT:	90 AMPS, 0.45 PF
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
ENCLOSURE:	NEMA 3R

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530029	15050-3TTA	2 FT 8 IN	1 FT ± 1 IN	AUTO
1301530040	15050-6TTA	7 FT 8 IN	6 FT ± 2 IN	AUTO
1301530026	15050-25TTA	26 FT 8 IN	25 FT ± 2 IN	AUTO
1301530034	15050-50TTA	51 FT 8 IN	50 FT ± 4 IN	AUTO
1301530030	15050-1TTM	2 FT 8 IN	1 FT ± 1 IN	MANUAL
1301530041	15050-6TTM	7 FT 8 IN	6 FT ± 2 IN	MANUAL
1301530027	15050-25TTM	26 FT 8 IN	25 FT ± 2 IN	MANUAL
1301530035	15050-50TTM	51 FT 8 IN	50 FT ± 4 IN	MANUAL

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
	DIMENSION UNITS		SCALE		CURRENT REV DESC: NEW SALES DRAWING CREATED			molex							
	INCH		NTS												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
	ANGULAR TOL ± 0.5 °														
	4 PLACES		±					EC NO: 679783			PRODUCT CUSTOMER DRAWING				
	3 PLACES		±		DRWN: VBASUTHKARP 2021/09/30										
	3 PLACES		±		CHK'D: DNGUYEN62 2021/10/05										
	DIVISIONAL SYMBOLS	2 PLACES		±		APPR: HKNEELAND 2021/10/11			DOCUMENT NUMBER 1301530029			DOC TYPE PSD	DOC PART 000	REVISION A	
		1 PLACE		±		INITIAL REVISION:									
0 PLACES		±		DRWN: VBASUTHKARP 2021/09/30											
				APPR: HKNEELAND 2021/10/11											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
								C-SIZE 130153		SEE TABLE		GENERAL MARKET		1 OF 1	

DOCUMENT STATUS	P1	RELEASE DATE	2021/10/11	17:53:55
-----------------	----	--------------	------------	----------

6



5

4

3

2

1

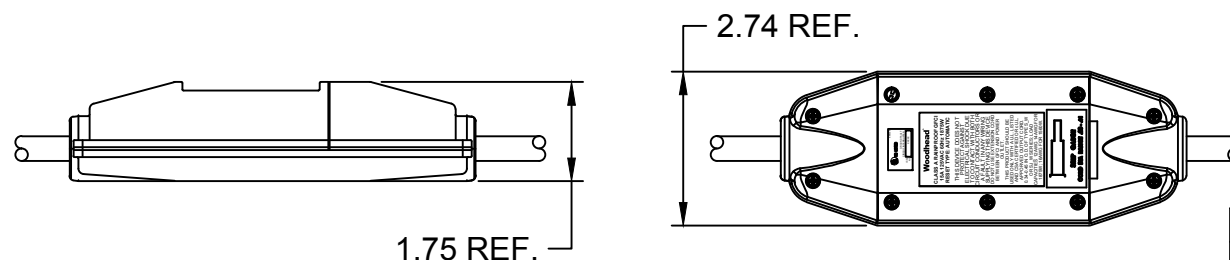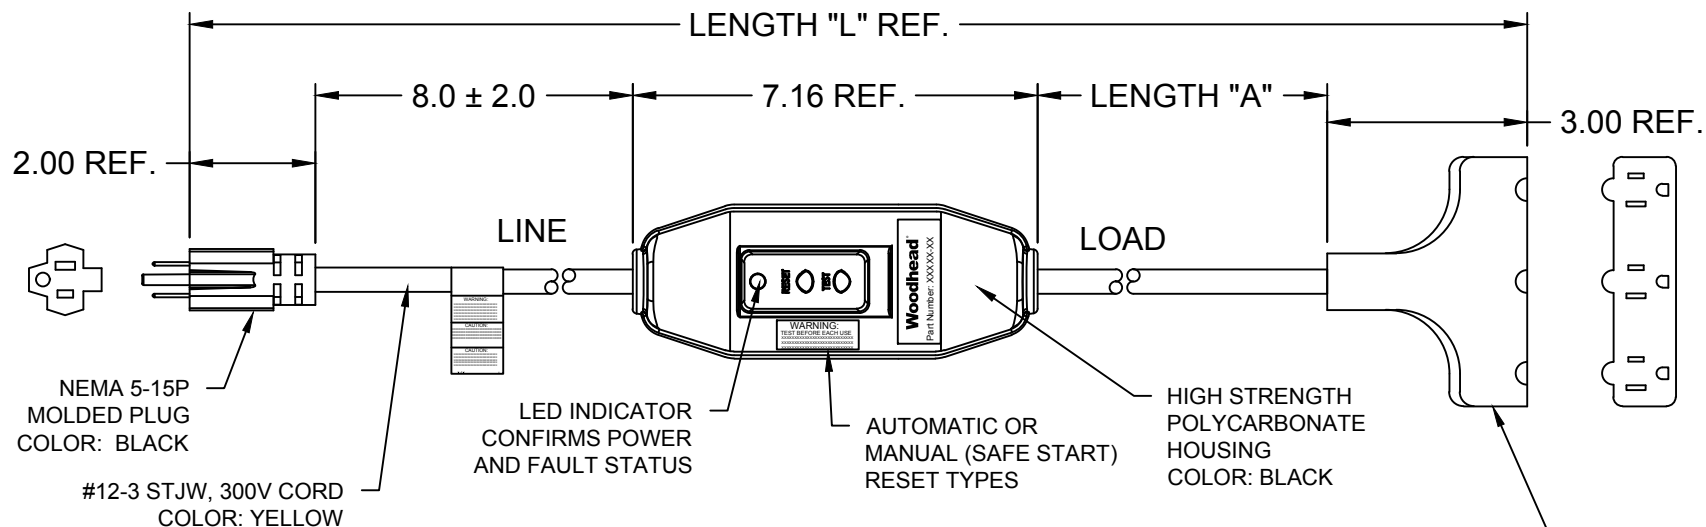

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530029	15050-3TTA	2 FT 8 IN	1 FT ± 1 IN	AUTO
1301530040	15050-6TTA	7 FT 8 IN	6 FT ± 2 IN	AUTO
1301530026	15050-25TTA	26 FT 8 IN	25 FT ± 2 IN	AUTO
1301530034	15050-50TTA	51 FT 8 IN	50 FT ± 4 IN	AUTO
1301530030	15050-1TTM	2 FT 8 IN	1 FT ± 1 IN	MANUAL
1301530041	15050-6TTM	7 FT 8 IN	6 FT ± 2 IN	MANUAL
1301530027	15050-25TTM	26 FT 8 IN	25 FT ± 2 IN	MANUAL
1301530035	15050-50TTM	51 FT 8 IN	50 FT ± 4 IN	MANUAL

TECHNICAL:

LISTED:

RATED SUPPLY VOLTAGE:

RATED CURRENT:

RESET TYPE:

OPERATING FREQUENCY:

TYPE:

GROUND TRIP CURRENT:

OVERLOAD CURRENT:

INSULATION VOLTAGE:

ENDURANCE OPERATIONS:

UL AND cUL

120 VAC

UP TO 15 AMPS OR CABLE RATING

AUTOMATIC OR MANUAL

60 Hz

CLASS A

4-6 mA

90 AMP 125 VAC

1,500 VRMS – 1 MINUTE

3000 OPERATIONS

INITIAL RELEASE EC NO: IPG2013-1078 DRWN: HRUIZ01 2013/02/06 CHK'D: HKNEELAN 2014/07/22 APPR: JFMURPHY 2015/04/20		DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE INCH		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
					mm	INCH	DRAWN BY HRUIZ01	DATE 2013/02/06	TITLE 120V 15A INLINE GFCI W/ TRIPLE TAP CONNECTOR NEMA 5-15			
				4 PLACES	±---	±---	CHECKED BY HKNEELAN	DATE 2014/07/22				
				3 PLACES	±---	±.005						
A				2 PLACES	±0.13	±.010	APPROVED BY JFMURPHY		DATE 2015/04/20	MOLEX MOLEX INCORPORATED		
				1 PLACE	±0.25	±.020	MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
				ANGULAR ±1/2°			SEE TABLE		SD-130153-014		1 OF 1	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			