

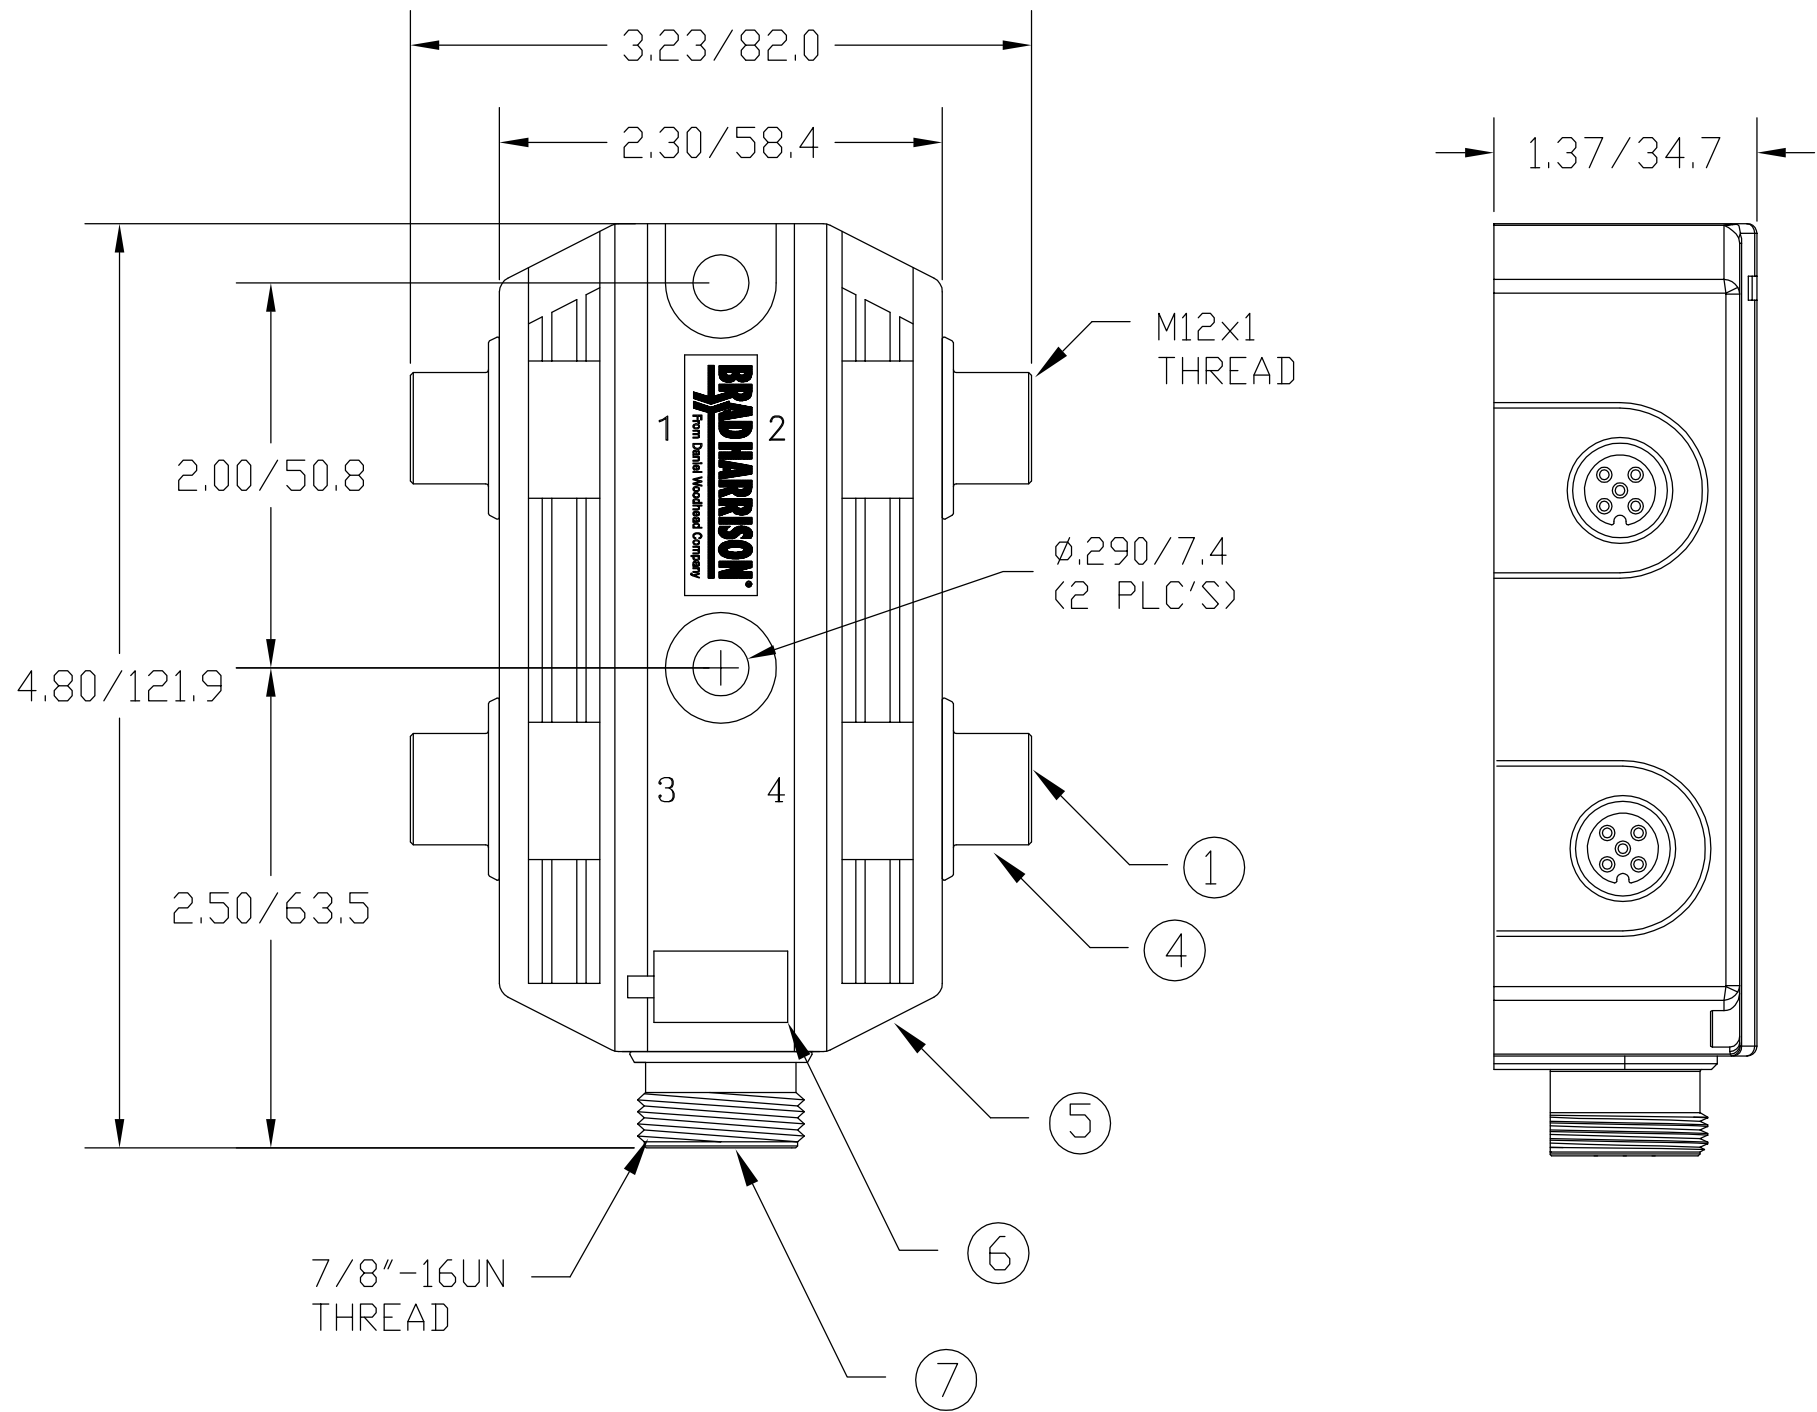


MATERIAL NUMBER	OLD PART NUMBER
130036-0011	DND4000

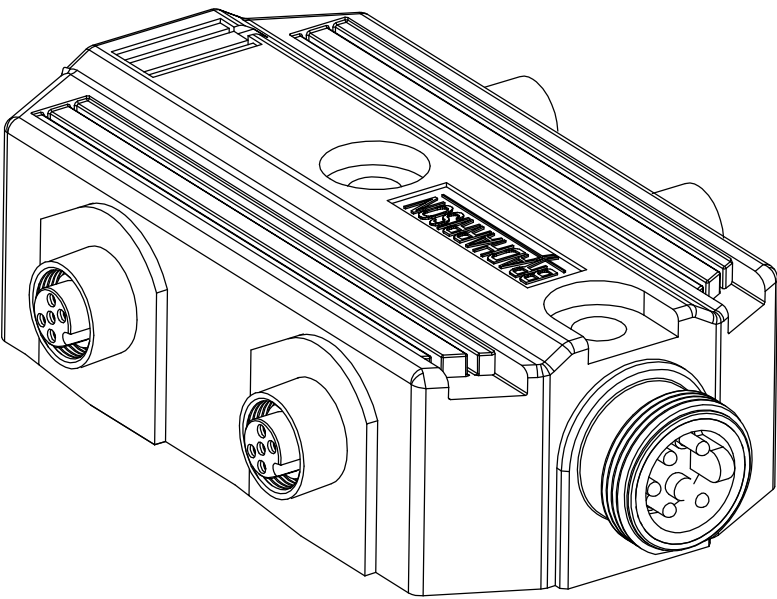

SCHEMATIC

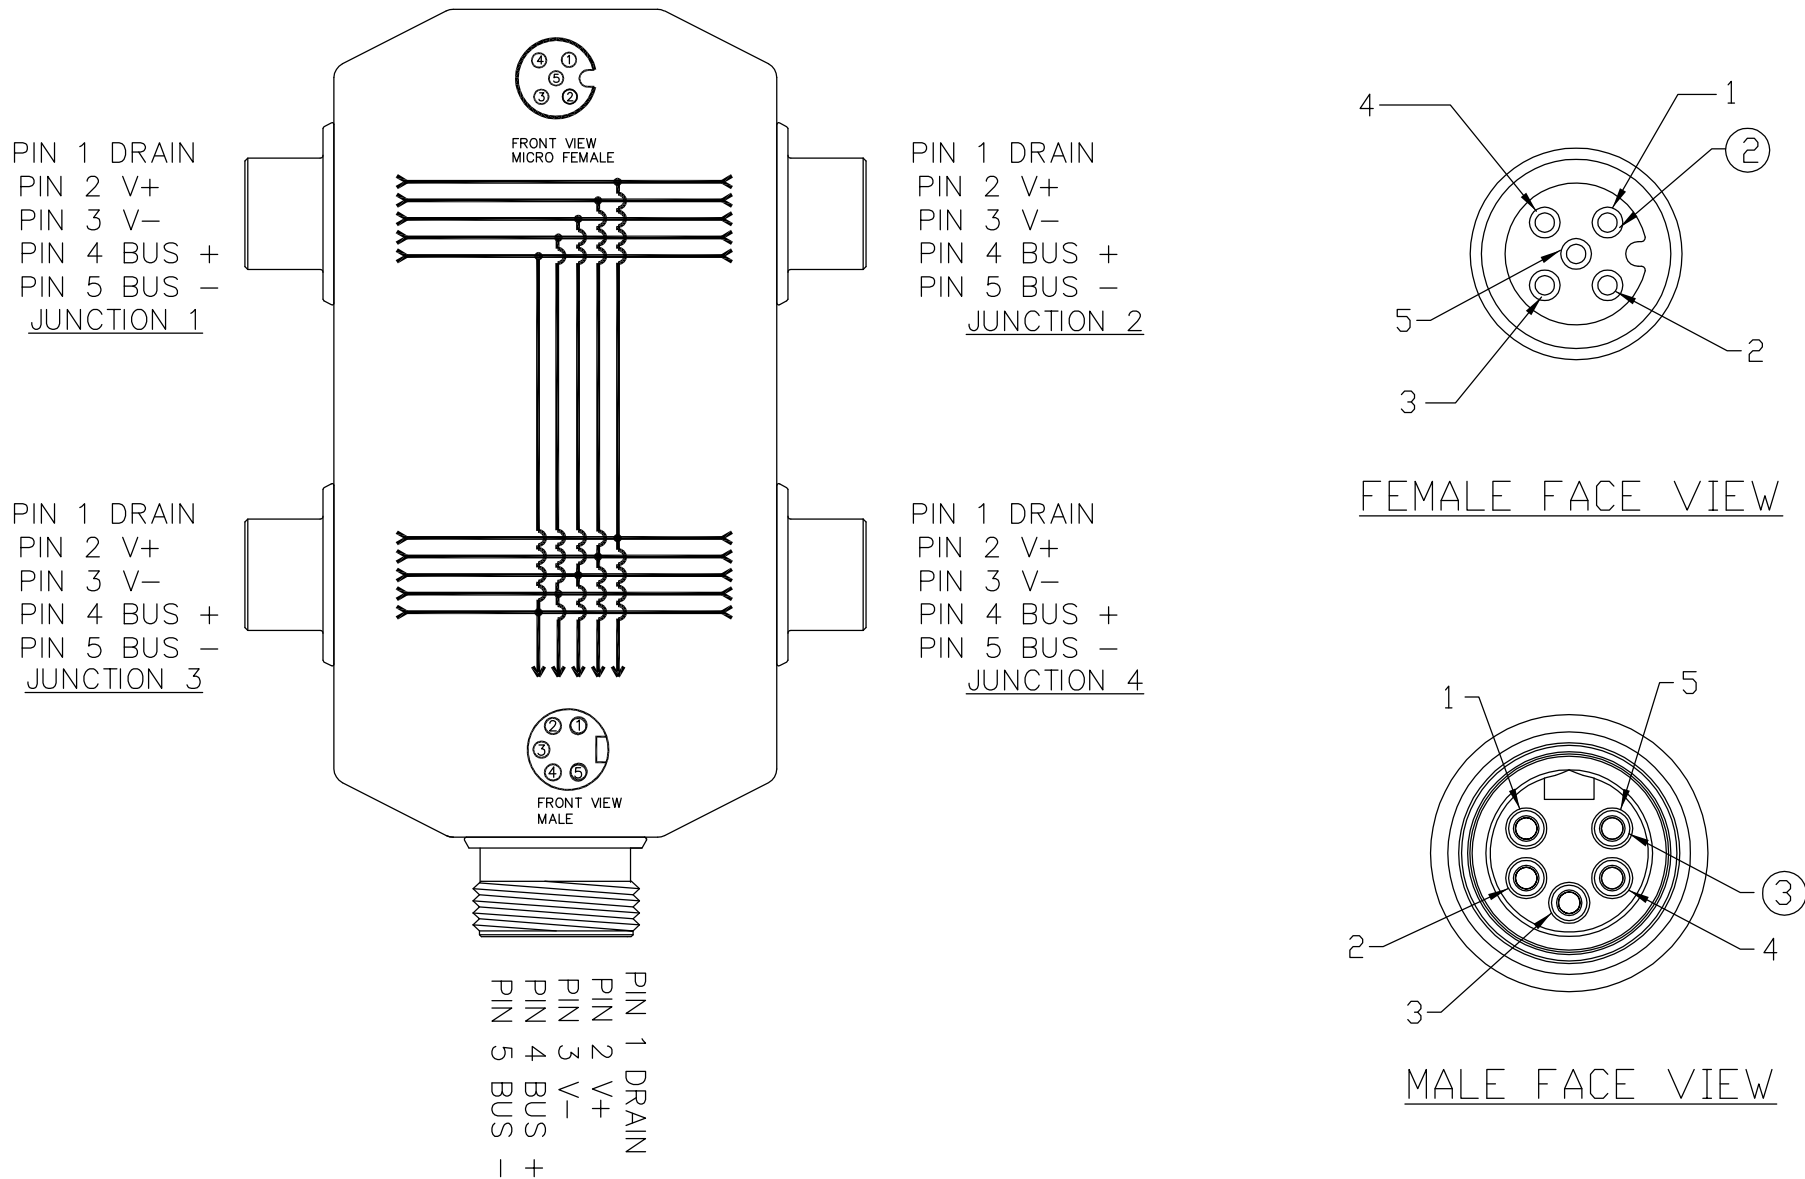

VOLTAGE RATING	120 VAC/VDC
AMPERAGE RATING	7 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	0°C TO 60°C

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NYLON	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	CONTACT PIN	COPPER ALLOY	GOLD OVER NICKEL
4	RECEPTACLE SHELL	ZINC DIE CAST	BLACK E-COATED
5	HOUSING	PBT	BLACK
6	LABEL	ABS	WHITE
7	INSERT	PVC	GRAY
	POTTING MATERIAL	EPOXY	BLACK

RLSD DRAWING EC NO: WNA2010-0020 DRWN: BWOODMAN 7/9/09 CH'KD: JM APPR: JFMURPHY 2009/07/20 A	DESCRIPTION REV	QUALITY SYMBOL ▽=0 C =0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE ----	DESIGN UNITS ----	THIRD ANGLE PROJECTION				
				mm	INCH	DRAWN BY BW	DATE 2009/07/09	TITLE MICRO 4 PORT DROP MPIS DEVICENET ----- MOLEX INCORPORATED						
			4 PLACES	±----	±----	CHECKED BY TW	DATE 2009/07/09							
			3 PLACES	±----	±----	APPROVED BY	DATE							
			2 PLACES	±----	±.01	-----	----							
			1 PLACE	±0.3	±----	MATERIAL NO. SEE CHART			DOCUMENT NO. SD-130036-006		SHEET NO. 1 OF 1			
			ANGULAR ±----°			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS											