
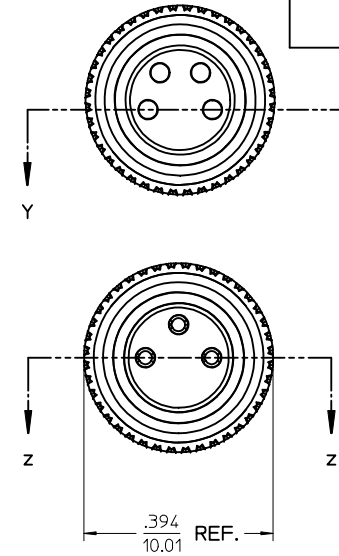
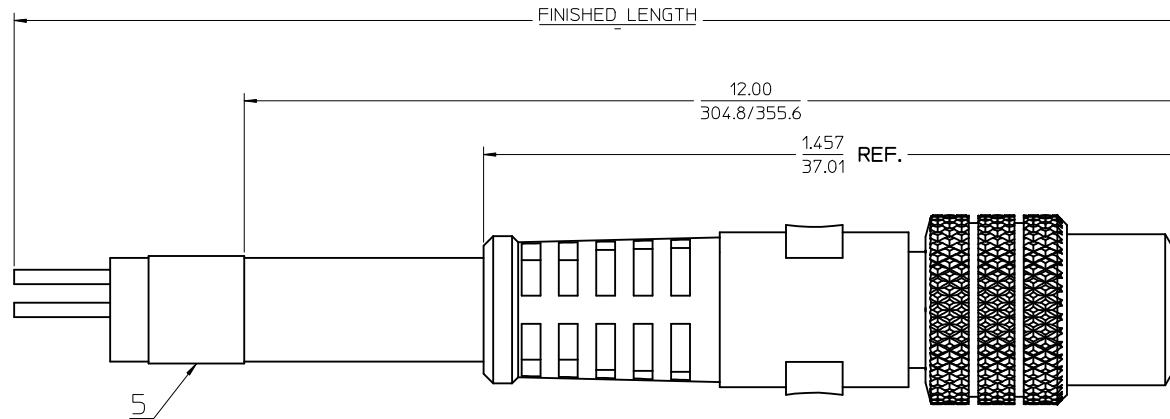


SEC Z-Z
FOR 3 POLE ONLY

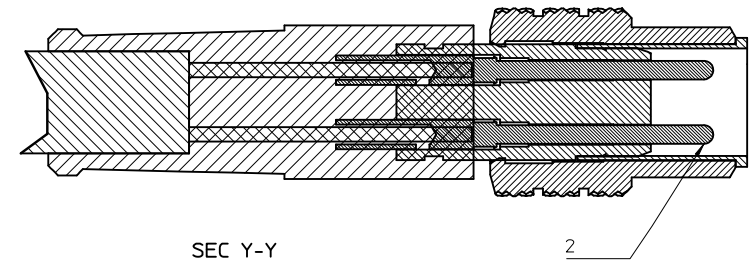




SEC Y-Y
FOR 4-5 POLE ONLY

MALE INSERT FRONT VIEW

3 POLE

4 POLE

5 POLE



1 BROWN
3 BLUE
4 BLACK

1 BROWN
2 WHITE
3 BLUE
4 BLACK

1 BROWN
2 WHITE
3 BLUE
4 BLACK
5 GREY

ENTER DESCRIPTION
EC NO: WNA2009-0840
DRAWN/SG
CHKD:
APPR: JFMURPHY
2009/07/14
2009/07/20

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .005	± .0005
2 PLACES	± .005	± .0005
1 PLACE	± .005	± .0005

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM

DRAWN BY
NKUMAR01

CHECKED BY
BWOODMAN

APPROVED BY
JFMURPHY

DATE
14/07/09

DATE
14/07/09

DATE
14/07/09

SEE CHART

SCALE
5:1

DESIGN UNITS
INCH

THIRD ANGLE PROJECTION

TITLE
NC 3P M/MP 2M
COUPLER 24AWG PV

MOLEX INCORPORATED

DOCUMENT NO.
SD-120086-132

SHEET NO.
1 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

J

I

H

G

F

E

D

C

B

A

J

I

H

G

F

E

D

C

B

A

				ASSEMBLY		
				3 POLE	4 POLE	5 POLE
SL.No	DESCRIPTION	MATERIAL	FINISH	QTY		
1	STAMP & FORM CONTACT	COPPER ALLOY	GOLD PLATED	3		
2	SCREW MACHINE CONTACT	COPPER ALLOY	GOLD PLATED		4	5
3	SLEEVE	BRASS	NICKEL PLATED	1	1	1
4	COUPLING NUT	BRASS	NICKEL PLATED			
5	LABEL	PLASTIC FILM	BLACK/YELLOW			
6	OVER MOLD	TPE	YELLOW			
7	CABLE, 24 AWG, 3 CONDUCTOR	PVC JACKET	YELLOW	1		
	CABLE, 24 AWG, 4 CONDUCTOR	PVC JACKET	YELLOW		1	
	CABLE, 24 AWG, 5 CONDUCTOR	PVC JACKET	YELLOW			1
8	INSERT MALE 3 POLE	PUR	BLACK	1		
	INSERT MALE 4 POLE	PUR	BLACK		1	
	INSERT MALE 5 POLE	PUR	BLACK			1

PART NUMBER	DESCRIPTION	FINISHED LENGTH
1200860132	403006A10M020	2M +90MM -0 [6' 6" +3.5" -0]
1200860133	403006A10M040	4M +150MM -0 [13' 1" +6" -0]
1200860134	403006A10M050	5M +150MM -0 [16' 4" +6" -0]
1200860575	403006A10M060	6M +150MM -0 [19' 7" +6" -0]
1200860135	403006A10M100	10M +300MM -0 [32' 4" +12" -0]
1200860183	404006A10M020	2M +90MM -0 [6' 6" +3.5" -0]
1200860184	404006A10M040	4M +150MM -0 [13' 1" +6" -0]
1200860185	404006A10M050	5M +150MM -0 [16' 4" +6" -0]
1200860576	404006A10M060	6M +150MM -0 [19' 7" +6" -0]
1200860577	404006A10M100	10M +300MM -0 [32' 4" +12" -0]
1200860206	405006A10M020	2M +90MM -0 [6' 6" +3.5" -0]
1200860207	405006A10M040	4M +150MM -0 [13' 1" +6" -0]
1200860208	405006A10M050	5M +150MM -0 [16' 4" +6" -0]
1200860541	405006A10M060	6M +150MM -0 [19' 7" +6" -0]
1200860579	405006A10M100	10M +300MM -0 [32' 4" +12" -0]

ENTER DESCRIPTION EC NO: WNA2009-0840 2009/07/14 DRWN:LSG CHKD: APPR:JFMURPHY 2009/07/20	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 5:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
				DRAWN BY NKUMAR01	DATE 14/07/09	TITLE NC 3P M/MP 2M COUPLER 24AWG PV		
				CHECKED BY BWOODMAN	DATE 14/07/09			
				APPROVED BY JFMURPHY	DATE 14/07/09			
				MATERIAL NO. 9999999999				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				