


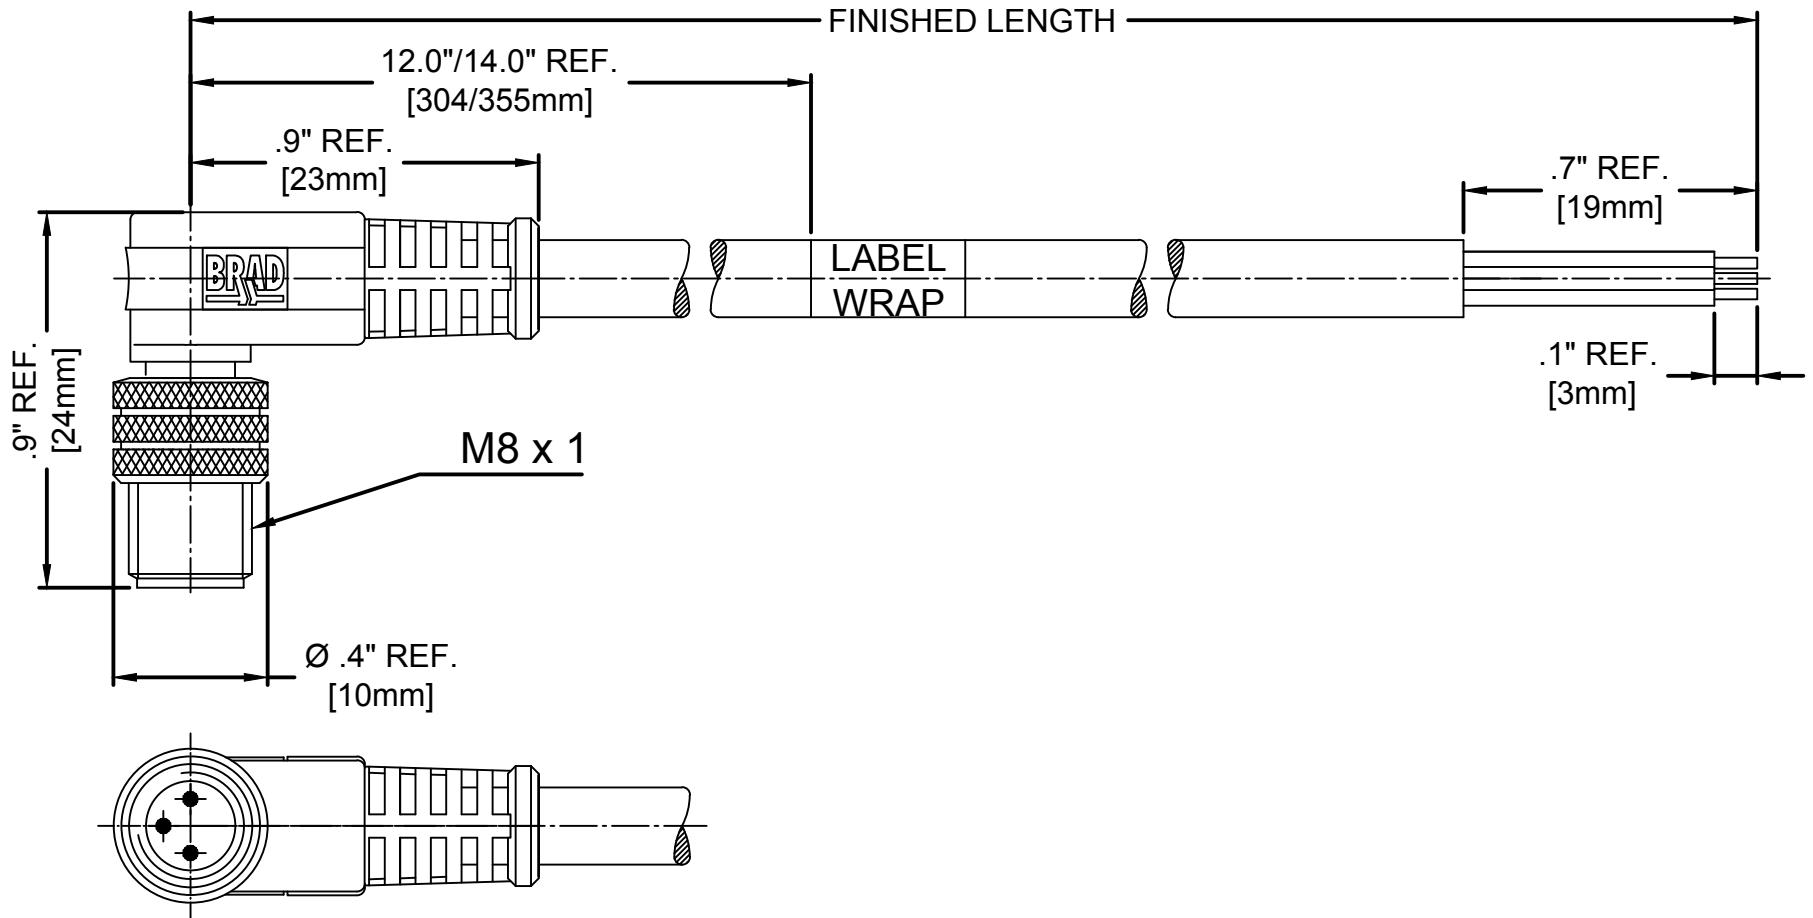

MALE FACE VIEW		
3-POLE	4-POLE	5-POLE
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GREY

403007A10M020

No Pole
3-5 Pole

cable type
#24/3-5
PVC YELLOW

cable length
020----2 Meters
100----10 Meters

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGHT IN/MM
1200860139	403007A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]
1200860141	403007A10M050	16.40' +6.50" -0 [5.0M +165.1 -0]
1200860142	403007A10M100	32.81' +12.50" -0 [10.0M +317.5 -0]
1200860186	404007A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]
1200860188	404007A10M050	16.40' +6.50" -0 [5.0M +165.1 -0]
1200860210	405007A10M020	6.56' +3.50" -0 [2.0M +88.9 -0]

SPECIFICATION DATA

COMPONENT	MATERIAL	FINISH
LABEL	MYLAR	BLACK/YELLOW
COUPLER	BRASS	NICKEL PLATED
CONTACT	COPPER ALLOY	Au OVER Ni
INSERT	PUR	BLACK
OVERMOLD	TPE	YELLOW
CABLE #24/3-5	PVC	YELLOW
VOLTAGE RATING:		3-4POL:60V/AC 75V/DC 5-POL: 30V/AC 36V/DC
AMPERAGE RATING:		3A
PROTECTION CLASS:		IP 68
OPERATING TEMPERATURE:		-20°C / 105°C

UPDATE FOR PART NUMBER MATRIX		EC NO:IPG2014-0989		DRWN:GGUSTAFS 11/27/13		CHKD:BARDEN		APPR:BWODMAN 2010/01/28		DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE NTS		DESIGN UNITS INCH		 THIRD ANGLE PROJECTION							
												 = 0		4 PLACES ± ---		mm		INCH		DRAWN BY REISSNER		DATE 2010/01/21		NC 3/4P M 90 24AWG PVC CABLE ----					
												 = 0		3 PLACES ± ---		±.005		CHECKED BY FP		DATE 2010/01/20									
														2 PLACES ±.13		±.010		APPROVED BY NSTAUDIG		DATE 2010/01/28		 MOLEX INCORPORATED		SHEET NO. 1 OF 1					
														1 PLACE ±.25		±.020													
														ANGULAR ± .5 °						DOCUMENT NO. SD-120086-030									
														DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE													
2																		SIZE A3				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							