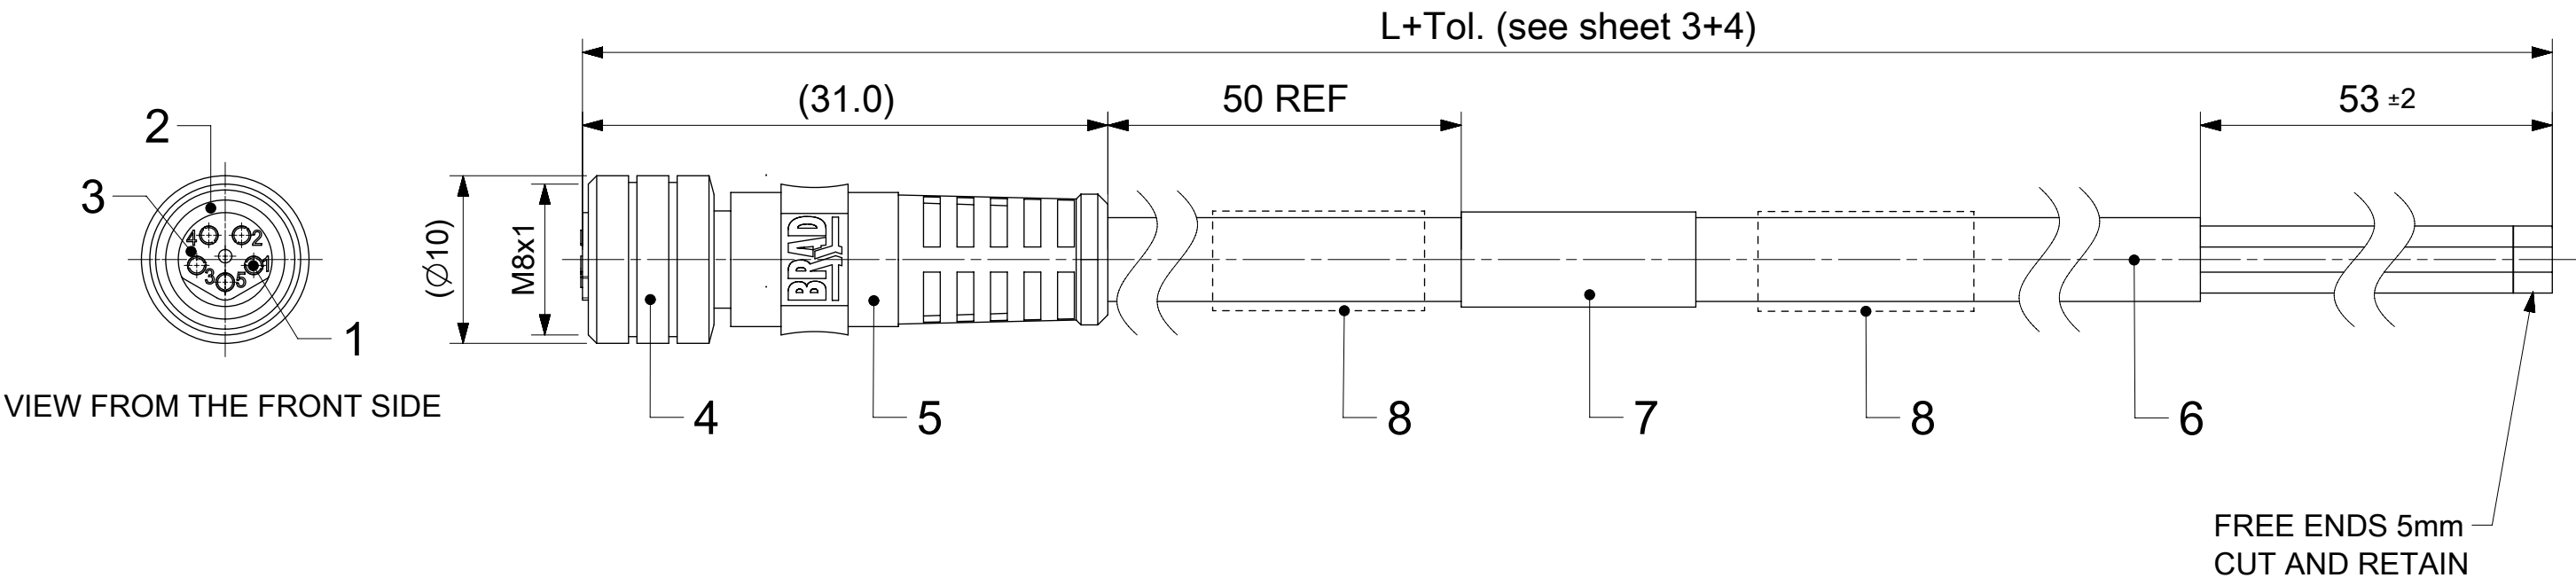


FEMALE PLUG M8 STRAIGHT






NOTES:

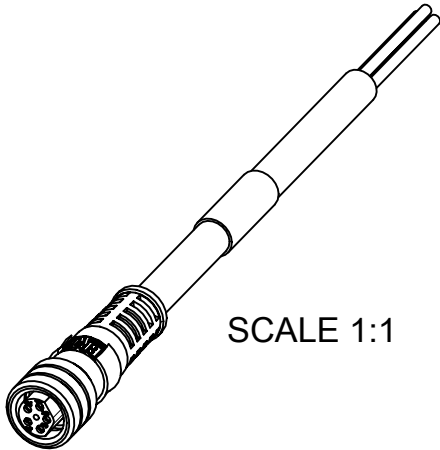
RATED VOLTAGE: 3 contacts 60V AC/DC
4 and 5 contacts 30V AC/DC

CURRENT RATING: 3, 4, 5 contacts 3A

PROTECTION CLASS: IP 67

TEMPERATURE: -25°C / +80°C

CONTACTS POSITION FRONT VIEW:						
FEMALE	3 CONTACTS		4 CONTACTS		5 CONTACTS	
						
	PIN	WIRE	PIN	WIRE	PIN	WIRE
	1	BROWN	1	BROWN	1	BROWN
	3	BLUE	2	WHITE	2	WHITE
4	BLACK	3	BLUE	3	BLUE	
		4	BLACK	4	BLACK	
				5	GREY	
CODING ACCORDING TO IEC 61076-2-104						



FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

8	2	I/D CARRIER (SEE MATRIX)	---	---
7	1	LABEL YELLOW	VINYL	---
	-	PRINTING FOR CABLES Ixx	---	---
6	-	CABLE	SEE SHEET 2	---
5	-	OVERMOULDING	TPU	SEE SHEET 2
4	1	COUPLING NUT M8 FEMALE	BRASS	SEE SHEET 2
3	1	INSERT FEMALE BLACK	TPU	---
2	1	O-RING RED	FKM	---
1	3 / 4 / 5	CONTACT M8 FEMALE	COPPER	SELECTIVE Au OVER Ni
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
	DIMENSION UNITS		SCALE		CURRENT REV DESC: MATRIX UPDATED			molex						
	mm		2:1											
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 670691 DRWN: RSCHIEBER 2021/07/19 CHK'D: RSILLER 2021/07/19 APPR: RSILLER 2021/07/19 INITIAL REVISION: DRWN: AKONDRACIUK 2017/02/16 APPR: MIWASIECZKO 2017/11/16			M8 SINGLE ENDED FEMALE STRAIGHT								
	ANGULAR TOL ± °													
4 PLACES ±		PRODUCT CUSTOMER DRAWING												
3 PLACES ±														
2 PLACES ±														
1 PLACE ±														
DIVISIONAL SYMBOLS	0 PLACES ±		DOCUMENT NUMBER			DOC TYPE		DOC PART		REVISION				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
			A3-SIZE		120086		SEE SHEET 3-4		GENERAL MARKET		1 OF 4			

F

E



D

C

BA[illegible]

F

EDCBA

1

1

