
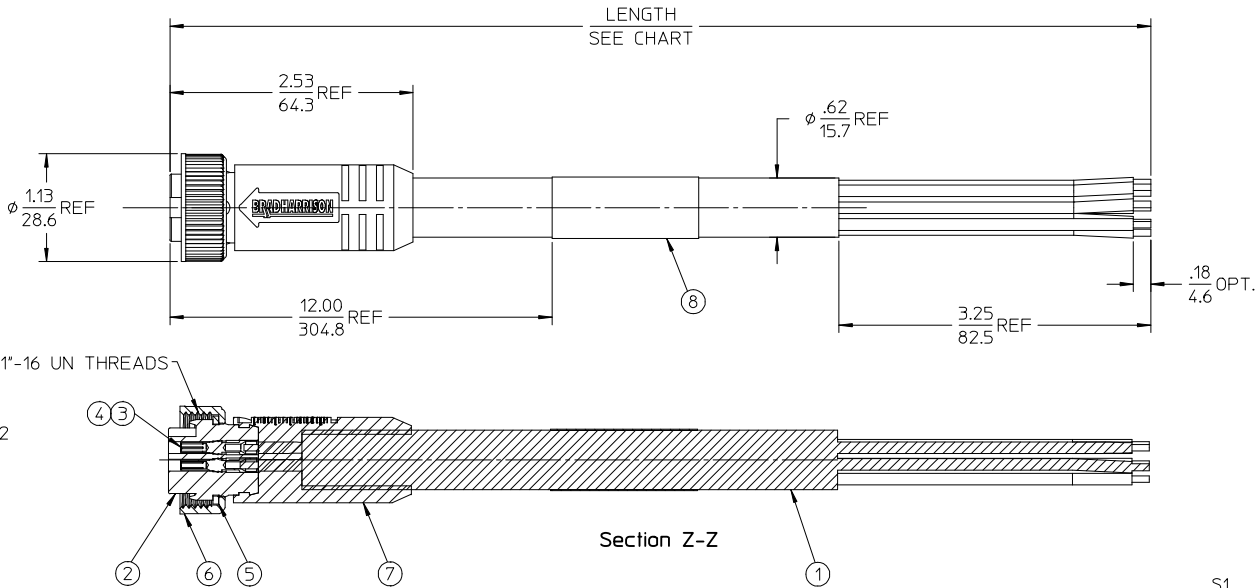


13	12	11	10	9	8	7	6	5	4	3	2	1
PART NUMBER	ENGINEERING NO.	LENGTH										
1300070139	208000A01F030	3' 0" +1.75 - 0 [.9M +44.5 - 0]										
1300070142	208000A01F060	6' 0" +2.19 - 0 [1.8M +55.6 - 0]										
1300070145	208000A01F120	12' 0" +3.50 - 0 [3.7M +88.9 - 0]										
1300070149	208000A01F200	20' 0" +6.50 - 0 [6.1M +165.1 - 0]										

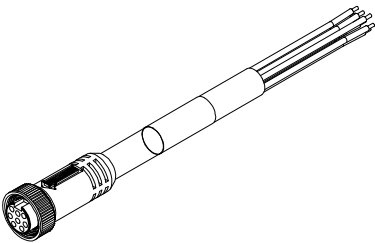

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. CABLE ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
 4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
 5. MATES WITH: MINI CHANGE, B-SIZE 8 POLE RECEPTACLE
 6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V
CURRENT RATING: 7 AMPS
 7. ASSEMBLY IS RoHS COMPLIANT

S1	
1	ORANGE
2	BLUE
3	WHITE/BLACK
4	BLACK
5	WHITE
6	RED
7	GREEN/YELLOW
8	RED/BLACK

WIRING DIAGRAM

8	1	LABEL	PLASTIC FILM	BLACK/YELLOW
7	1	OVERMOLD	PVC	YELLOW
6	1	COUPLING NUT	ZIN DIE CAST	BLACK
5	1	FRICTION RING	NYON	NATURAL
4	8	SOCKET CONTACT	BRASS	GOLD PLATED
3	8	SOCKET SLEEVE	STAINLESS STEEL	
2	1	INSERT, FEMALE, 8 POLE	PVC	YELLOW
1	1	CABLE, 16-8 ST00W/ST	PVC JACKET	YELLOW
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED
EC NO: WNA2009-0795
DRWN:BRUPERT 2009/06/02
CHKD:BRUPERT
APPR:JFMURPHY 2009/06/10

DESCRIPTION
REV

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± .01
1 PLACE ± 0.3 ± ---
ANGULAR ± 1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM
DRAWN BY DATE
BRUPERT 2009/04/02
CHECKED BY DATE
B.WOODMAN 2009/04/03
APPROVED BY DATE
J.MURPHY 2008/04/06

MATERIAL NO.
SEE CHART

SIZE
C

SCALE
1:1
DESIGN UNITS
INCH
THIRD ANGLE PROJECTION

TITLE
MINI-CHANGE CORD ASSY
FEMALE, B-SIZE
8 POLE



MOLEX INCORPORATED

DOCUMENT NO.
SD-130007-006

SHEET NO.
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

13	12	11	10	9	8	7	6	5	4	3	2	1
PART NUMBER	ENGINEERING NO.	LENGTH										
1300070139	208000A01F030	3' 0" +1.75 - 0 [.9M +44.5 - 0]										
1300070142	208000A01F060	6' 0" +2.19 - 0 [1.8M +55.6 - 0]										
1300070145	208000A01F120	12' 0" +3.50 - 0 [3.7M +88.9 - 0]										
1300070149	208000A01F200	20' 0" +6.50 - 0 [6.1M +165.1 - 0]										

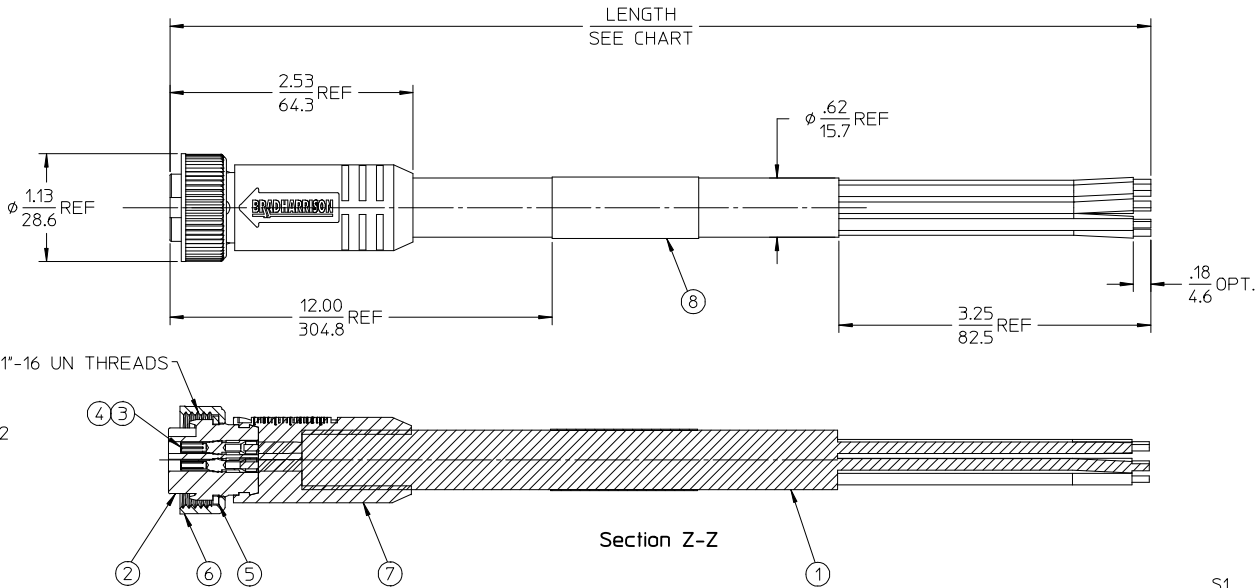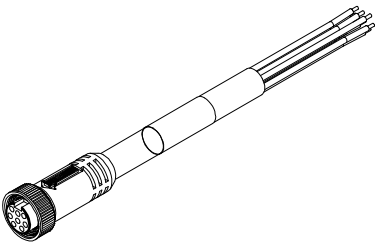

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. CABLE ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
 4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
 5. MATES WITH: MINI CHANGE, B-SIZE 8 POLE RECEPTACLE
 6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V
CURRENT RATING: 7 AMPS
 7. ASSEMBLY IS RoHS COMPLIANT

S1	
1	ORANGE
2	BLUE
3	WHITE/BLACK
4	BLACK
5	WHITE
6	RED
7	GREEN/YELLOW
8	RED/BLACK

WIRING DIAGRAM

8	1	LABEL	PLASTIC FILM	BLACK/YELLOW
7	1	OVERMOLD	PVC	YELLOW
6	1	COUPLING NUT	ZIN DIE CAST	BLACK
5	1	FRICTION RING	NYON	NATURAL
4	8	SOCKET CONTACT	BRASS	GOLD PLATED
3	8	SOCKET SLEEVE	STAINLESS STEEL	
2	1	INSERT, FEMALE, 8 POLE	PVC	YELLOW
1	1	CABLE, 16-8 ST00W/ST	PVC JACKET	YELLOW
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED
EC NO: WNA2009-0795
DRWN:BRUPERT 2009/06/02
CHKD:BRUPERT
APPR:JFMURPHY 2009/06/10

DESCRIPTION
REV

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± .01
1 PLACE ± 0.3 ± ---
ANGULAR ± 1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM
DRAWN BY DATE
BRUPERT 2009/04/02
CHECKED BY DATE
B.WOODMAN 2009/04/03
APPROVED BY DATE
J.MURPHY 2008/04/06

MATERIAL NO.
SEE CHART

SIZE
C

SCALE
1:1
DESIGN UNITS
INCH
THIRD ANGLE PROJECTION

TITLE
MINI-CHANGE CORD ASSY
FEMALE, B-SIZE
8 POLE

MOLEX INCORPORATED

DOCUMENT NO.
SD-130007-006

SHEET NO.
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION