

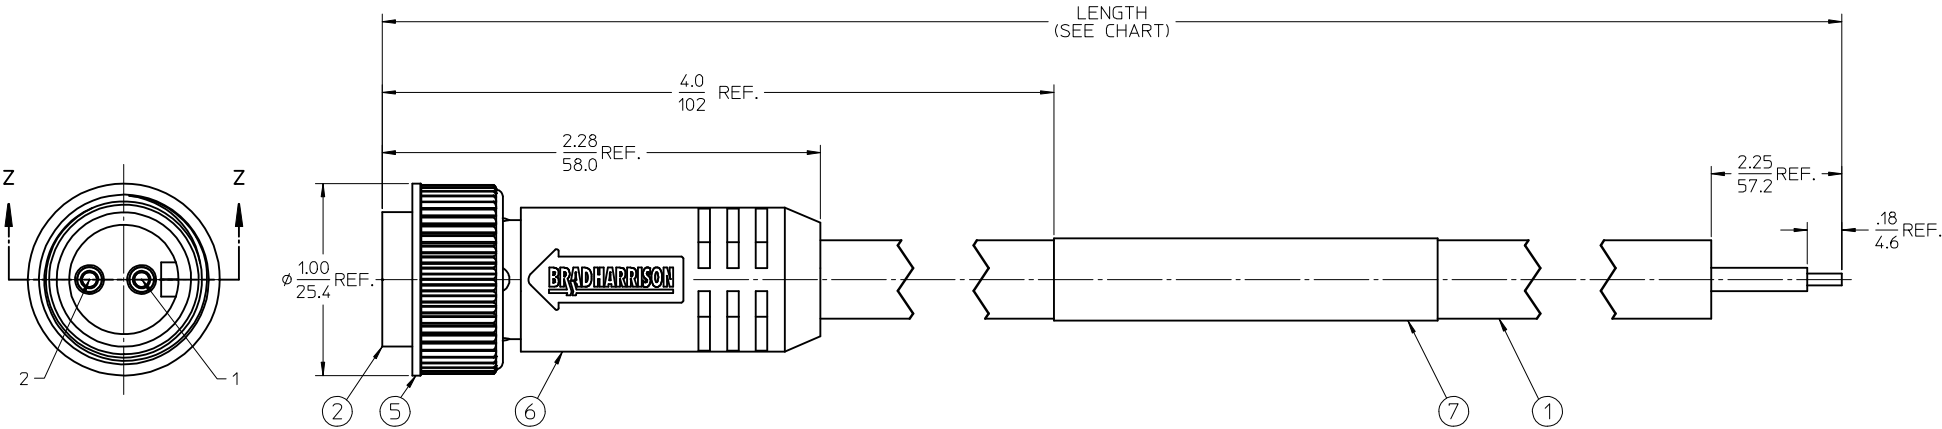


13	12	11	10	9	8	7	6	5	4	3	2	1
PART NUMBER	ENGINEERING NO.	LENGTH										
1300060156	102002A01F030	3' +1.75 - 0 [0.9M +44.5 - 0]										
1300060159	102002A01F060	6' +2.19 - 0 [1.8M +55.6 - 0]										
1300060162	102002A01F120	12' +3.50 - 0 [3.7M +88.9 - 0]										
1300060168	102002A01F200	20' +6.50 - 0 [6.1M +165.1 - 0]										

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. CABLE ASSEMBLIES ARE BAGGED SEPARATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
 4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
 5. MATES WITH: MINI CHANGE, A-SIZE 2 POLE RECEPTACLE
 6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V
CURRENT RATING: 13 AMPS
 7. ASSEMBLY IS RoHS COMPLIANT

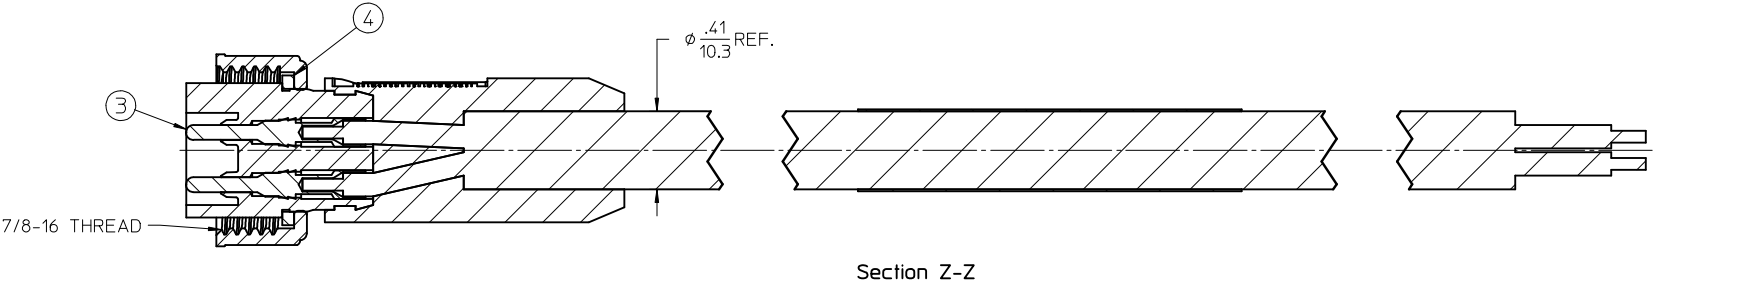

WIRING DIAGRAM

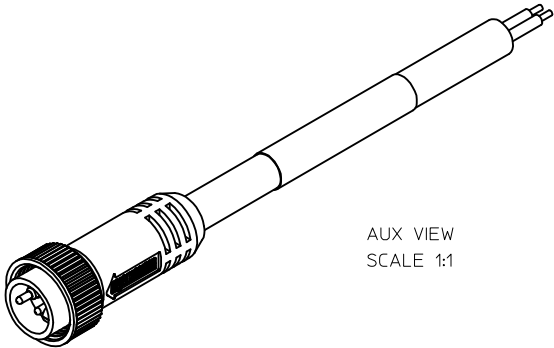

7	1	LABEL	PLASTIC FILM	BLACK/YELLOW
6	1	OVERMOLD, STRAIGHT	PVC	YELLOW
5	1	COUPLING NUT, FEMALE	ZINC DIE CAST	BLACK
4	1	FRICTION RING	NYLON	WHITE
3	2	CONTACT PIN, 16 AWG	BRASS	GOLD PLATED
2	1	INSERT, MALE, 2 POLE	PVC	YELLOW
1	1	CABLE, ST00W/ST #16/2	PVC JACKET	GRAY
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

PURCHASING DRAWING
EC NO: WNA2009-0810
DRAWN: L. HARTMANN 2009/06/05
CHKD: R. STONE
APPR: J. MURPHY 2009/08/17

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .010	± .0010
2 PLACES	± .020	± .0020
1 PLACE	± .040	± .0040

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM

DRAWN BY L. HARTMANN DATE 2009/06/05
CHECKED BY R. STONE DATE 2009/06/08
APPROVED BY J. MURPHY DATE 2009/06/08

MATERIAL NO. SEE CHART

SIZE C

SCALE 2:1
DESIGN UNITS INCH
THIRD ANGLE PROJECTION

TITLE
MINI-CHANGE PORTABLE
2 POLE MALE STRAIGHT
#16/2 YELLOW ST00W/ST

MOLEX INCORPORATED

DOCUMENT NO. SD-130006-002
SHEET NO. 1 OF 1





THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

13	12	11	10	9	8	7	6	5	4	3	2	1
PART NUMBER	ENGINEERING NO.	LENGTH										
1300060156	102002A01F030	3' +1.75 - 0 [0.9M +44.5 - 0]										
1300060159	102002A01F060	6' +2.19 - 0 [1.8M +55.6 - 0]										
1300060162	102002A01F120	12' +3.50 - 0 [3.7M +88.9 - 0]										
1300060168	102002A01F200	20' +6.50 - 0 [6.1M +165.1 - 0]										

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. CABLE ASSEMBLIES ARE BAGGED SEPARATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
 4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
 5. MATES WITH: MINI CHANGE, A-SIZE 2 POLE RECEPTACLE
 6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V
CURRENT RATING: 13 AMPS
 7. ASSEMBLY IS RoHS COMPLIANT



WIRING DIAGRAM

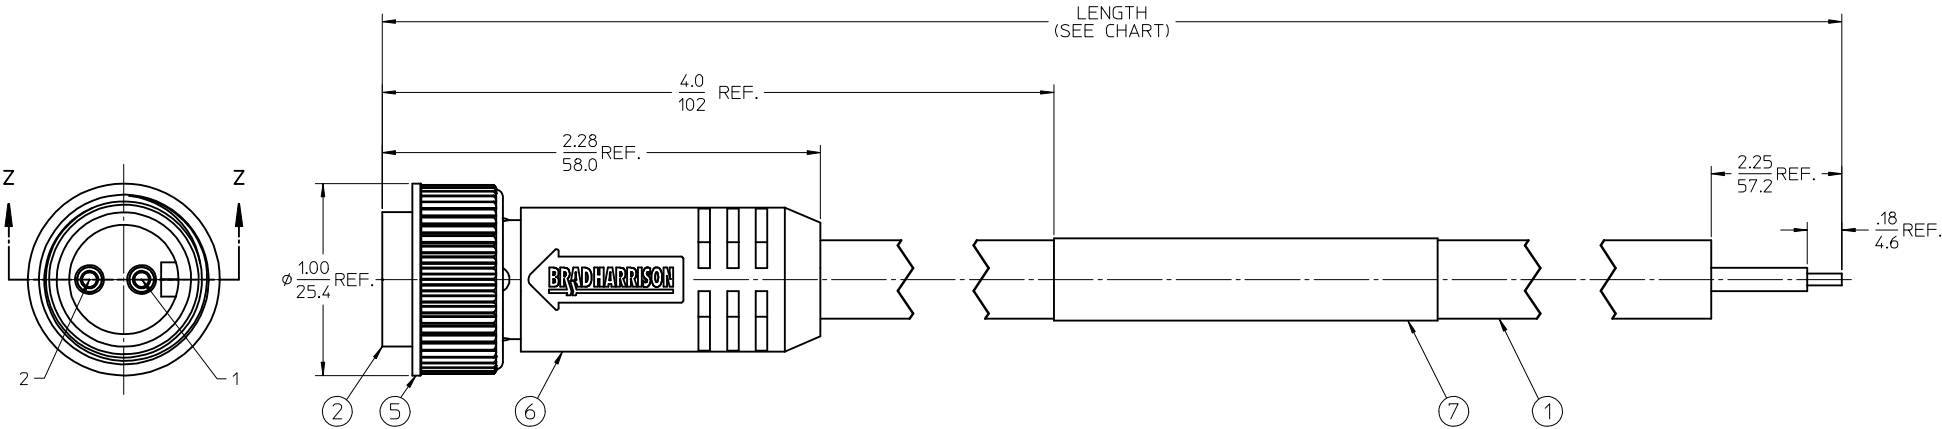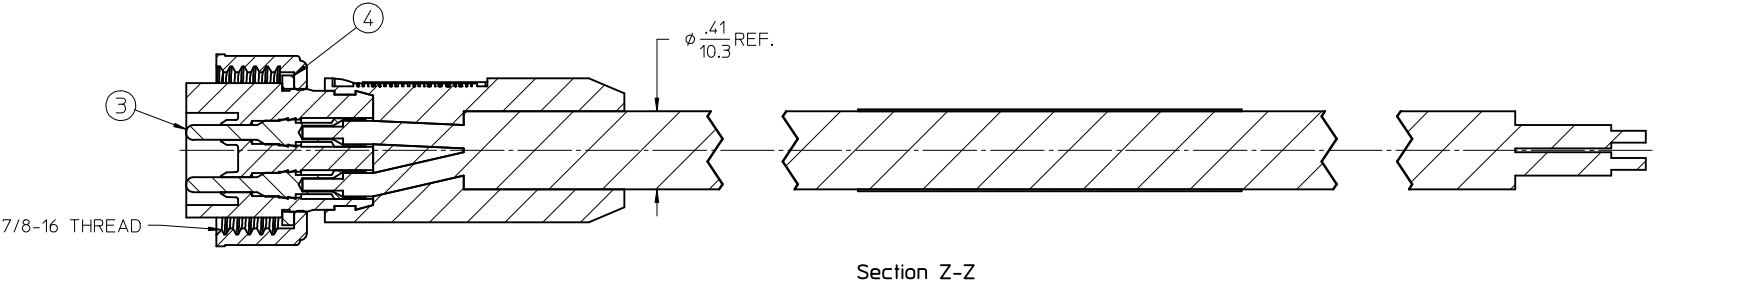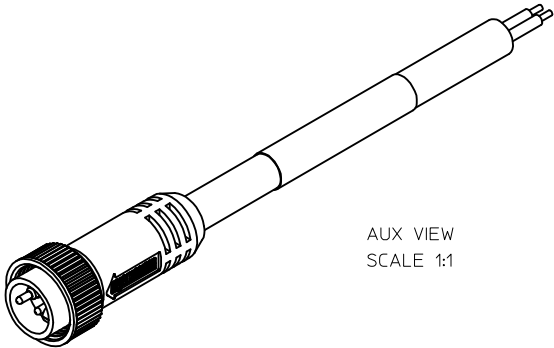

7	1	LABEL	PLASTIC FILM	BLACK/YELLOW
6	1	OVERMOLD, STRAIGHT	PVC	YELLOW
5	1	COUPLING NUT, FEMALE	ZINC DIE CAST	BLACK
4	1	FRICTION RING	NYLON	WHITE
3	2	CONTACT PIN, 16 AWG	BRASS	GOLD PLATED
2	1	INSERT, MALE, 2 POLE	PVC	YELLOW
1	1	CABLE, ST00W/ST #16/2	PVC JACKET	GRAY
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

PURCHASING DRAWING EC NO: WNA2009-0810 DRAWN: LHARTMANN 2009/06/05 CHKD: RSTONE APPR: JFMURPHY 2009/08/17	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	TITLE MINI-CHANGE PORTABLE 2 POLE MALE STRAIGHT #16/2 YELLOW ST00W/ST	DOCUMENT NO. SD-130006-002	SHEET NO. 1 OF 1					
				mm	INCH	DRAWN BY LHARTMANN	DATE 2009/06/05	 MOLEX INCORPORATED									
			4 PLACES	± ---	± ---	CHECKED BY RSTONE	DATE 2009/06/08										
			3 PLACES	± ---	± .005	APPROVED BY JFMURPHY	DATE 2009/06/08										
			2 PLACES	± ---	± .010	MATERIAL NO.											
			1 PLACE	± ---	± .020	SIZE C											
			ANGULAR ±1/2°			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							SEE CHART				
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														