

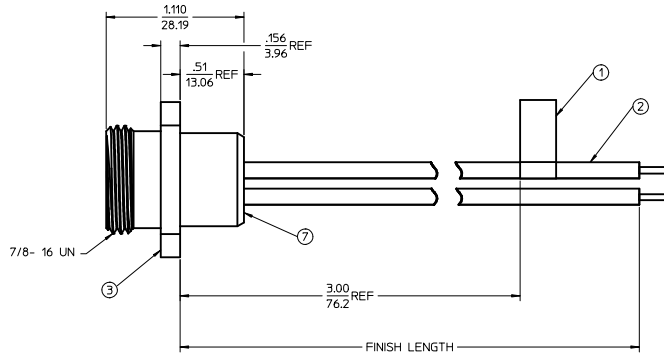
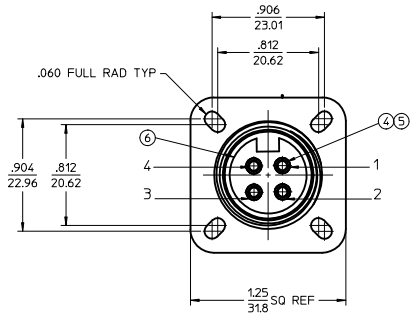


MATERIAL NUMBER	OLD PART NUMBER	FINISH LENGTH
130013-0402	1R4G04A20A120	1.0'+.75"-0 [.3M+19.1-0]
130013-0404	1R4G04A20F030	3.0'+1.75"-0 [.9M+44.5-0]
130013-0405	1R4G04A20F060	6.0'+2.19"-0 [1.8+55.6-0]

VOLTAGE RATING	600 VAC/VDC
AMPERAGE RATING	10A
PROJECTION	IP67
OPERATING TEMPERATURE	-20° C TO 105° C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

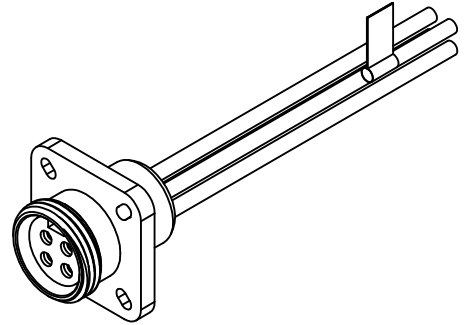

WIRING DIAGRAM

- 1 BLACK
- 2 WHITE
- 3 RED
- 4 GREEN-YELLOW

ITEM.	QTY.	COMPONENT	MATERIAL	FINISH
1	1	FLAG LABEL	PLASTIC FILM	BLACK/YELLOW
2	4	CONDUCTOR-16 AWG, 26X#30 COPPER STRANDING 600V	PVC	SEE WIRING DIAGRAM
3	1	RECEPTACLE SHELL	ALUMINUM	ANODIZED
4	4	SOCKET SLEEVE	STAINLESS STEEL	
5	4	CONTACT SOCKET	COPPER ALLOY	GOLD PLATED
6	1	4 POLE INSERT	PVC	YELLOW
7	1	POTTING	EPOXY	BLACK

UPDATE DOC EC NO: WNA2010-0423 DRAWN BY: JF MURPHY CHECKED BY: B. WOODMAN APPROVED BY: JF MURPHY DATE: 2010/01/14 DATE: 2010/01/14 DATE: 2010/01/14	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±.005 ±.005 3 PLACES ±.010 ±.010 2 PLACES ±.015 ±.015 1 PLACE ±.020 ±.020 ANGULAR ±1/2°	DIMENSION STYLE IN/MM DRAWN BY: S. GARCIA DATE: 2009/07/01 CHECKED BY: B. WOODMAN DATE: 2009/07/01 APPROVED BY: JF MURPHY DATE: 2010/01/14	SCALE 2:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION	TITLE FEMALE FLANGED RECEPTACLE MINI-CHANGE 4P 16AWG PVC	MATERIAL NO. SD-130013-008 DOCUMENT NO.	SHEET NO. 1 OF 1

