
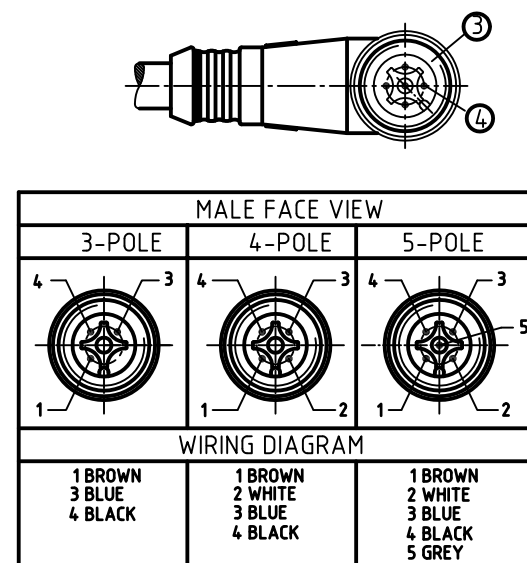
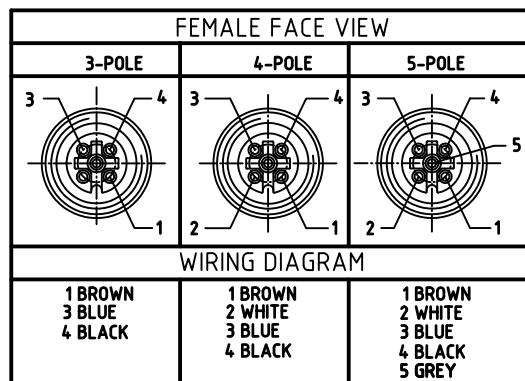


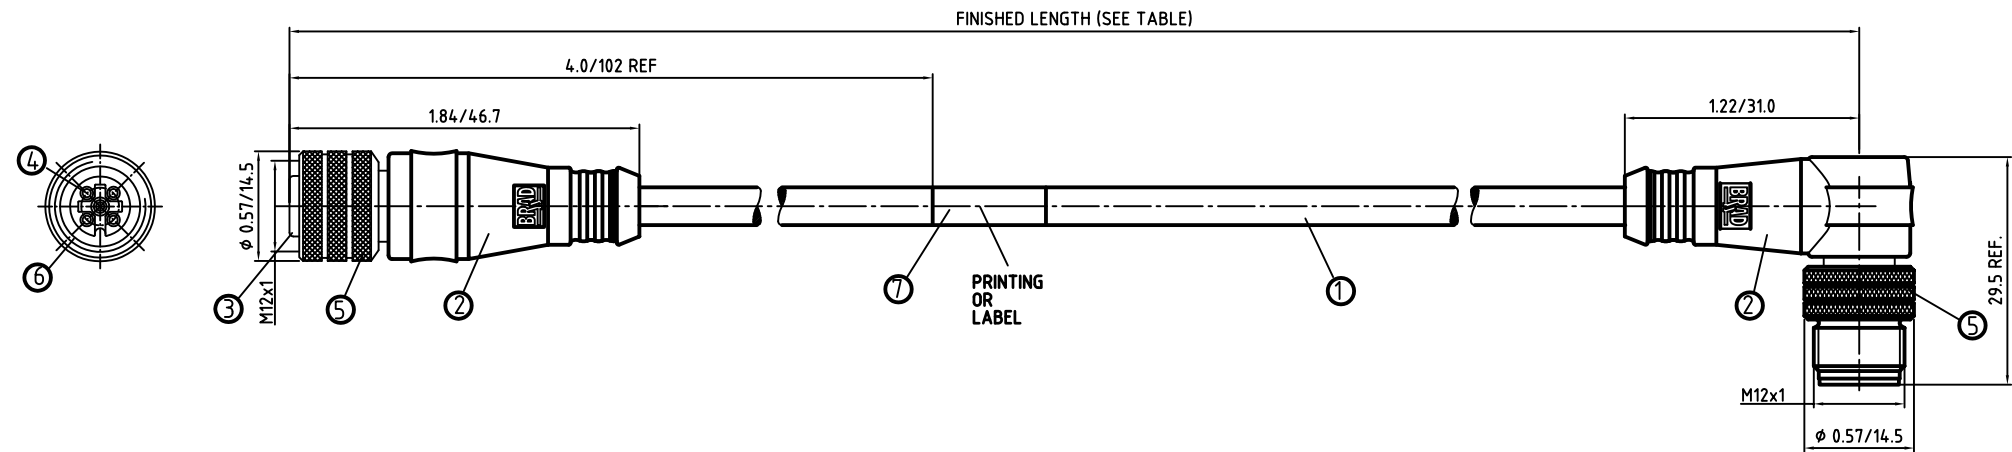


CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
ASSEMBLY IS	RoHS COMPLIANT

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	VITON	RED
5	COUPLER	BRASS	NICKEL PLATED
4	SOCKET/PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	POLYURETHANE (PUR)	YELLOW
1	CABLE- 22/3-5 (COPPER STRANDING) 3/4/5 CONDUCT. 300V	JACKET: PVC	JACKET: YELLOW

DESCRIPTION EC NO: WEU2010-0325 DRWN: LSTEMMLE 2010/02/03 CHKD: NS APPR: FPACHER 2010/02/04 1	DESCRIPTION REV	QUALITY SYMBOLS ▽ = 0 ◁ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		mm	INCH	DRAWN BY LSTEMMLE	DATE 2010/02/03	MICRO-CHANGE CORDSET 3/4/5 P. FE STR/ MA 90 22/3-5 YELLOW PVC CABLE			
				4 PLACES	±---	±---	CHECKED BY RE	DATE 2010/02/04				
				3 PLACES	±---	±---	APPROVED BY FPACHER	DATE 2010/02/04				
				2 PLACES	±---	±.01	MATERIAL NO. SEE TABLE SHEET 2		DOCUMENT NO. SD-120066-027	SHEET NO. 1 OF 1		
				1 PLACE	±0.3	±---					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
			ANGULAR ± --- °									

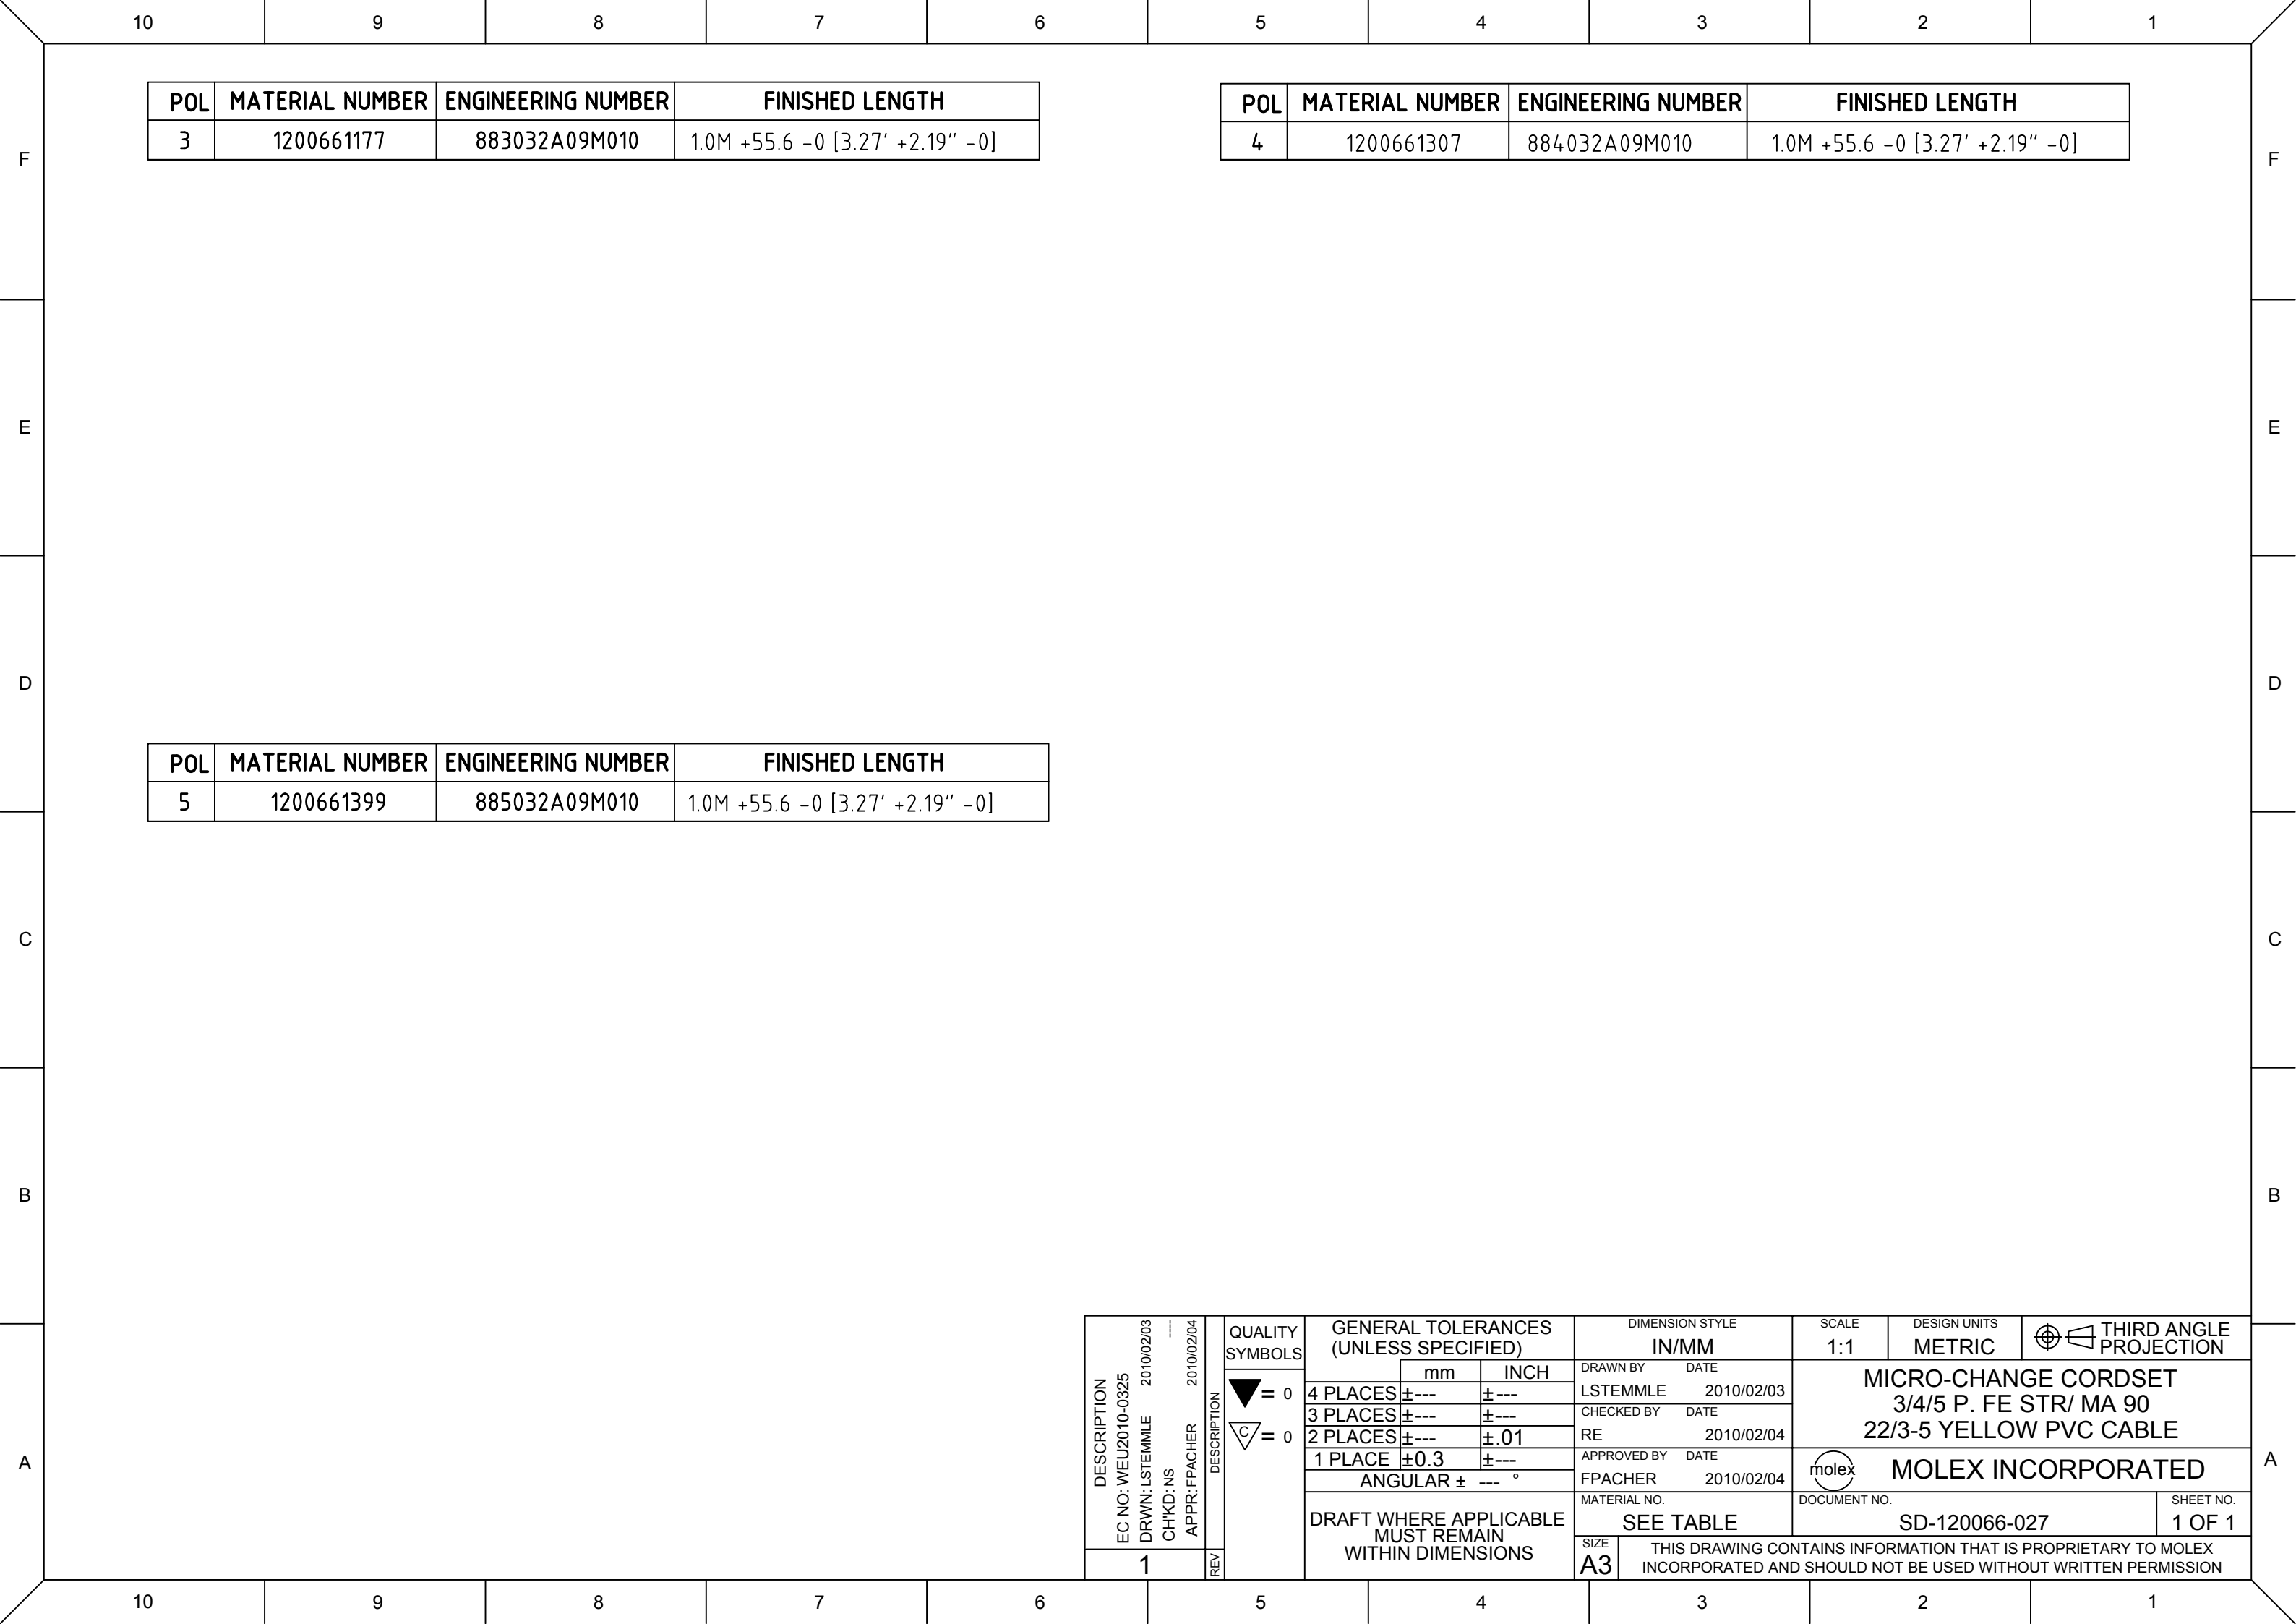

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200661177	883032A09M010	1.0M +55.6 -0 [3.27' +2.19" -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200661307	884032A09M010	1.0M +55.6 -0 [3.27' +2.19" -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
5	1200661399	885032A09M010	1.0M +55.6 -0 [3.27' +2.19" -0]

DESCRIPTION EC NO: WEU2010-0325 DRWN: LSTEMMLE 2010/02/03 CHKD: NS APPR: FPACHER 2010/02/04	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
		▽ = 0 ▽C = 0		mm	INCH	IN/MM		1:1	METRIC	MICRO-CHANGE CORDSET 3/4/5 P. FE STR/ MA 90 22/3-5 YELLOW PVC CABLE	
			4 PLACES	±---	±---	DRAWN BY	DATE				
			3 PLACES	±---	±---	LSTEMMLE	2010/02/03				
			2 PLACES	±---	±.01	CHECKED BY	DATE				
			1 PLACE	±0.3	±---	RE	2010/02/04				
			ANGULAR ± --- °			APPROVED BY	DATE	molex MOLEX INCORPORATED			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.			SHEET NO.	
					SEE TABLE		SD-120066-027		1 OF 1		
		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							