



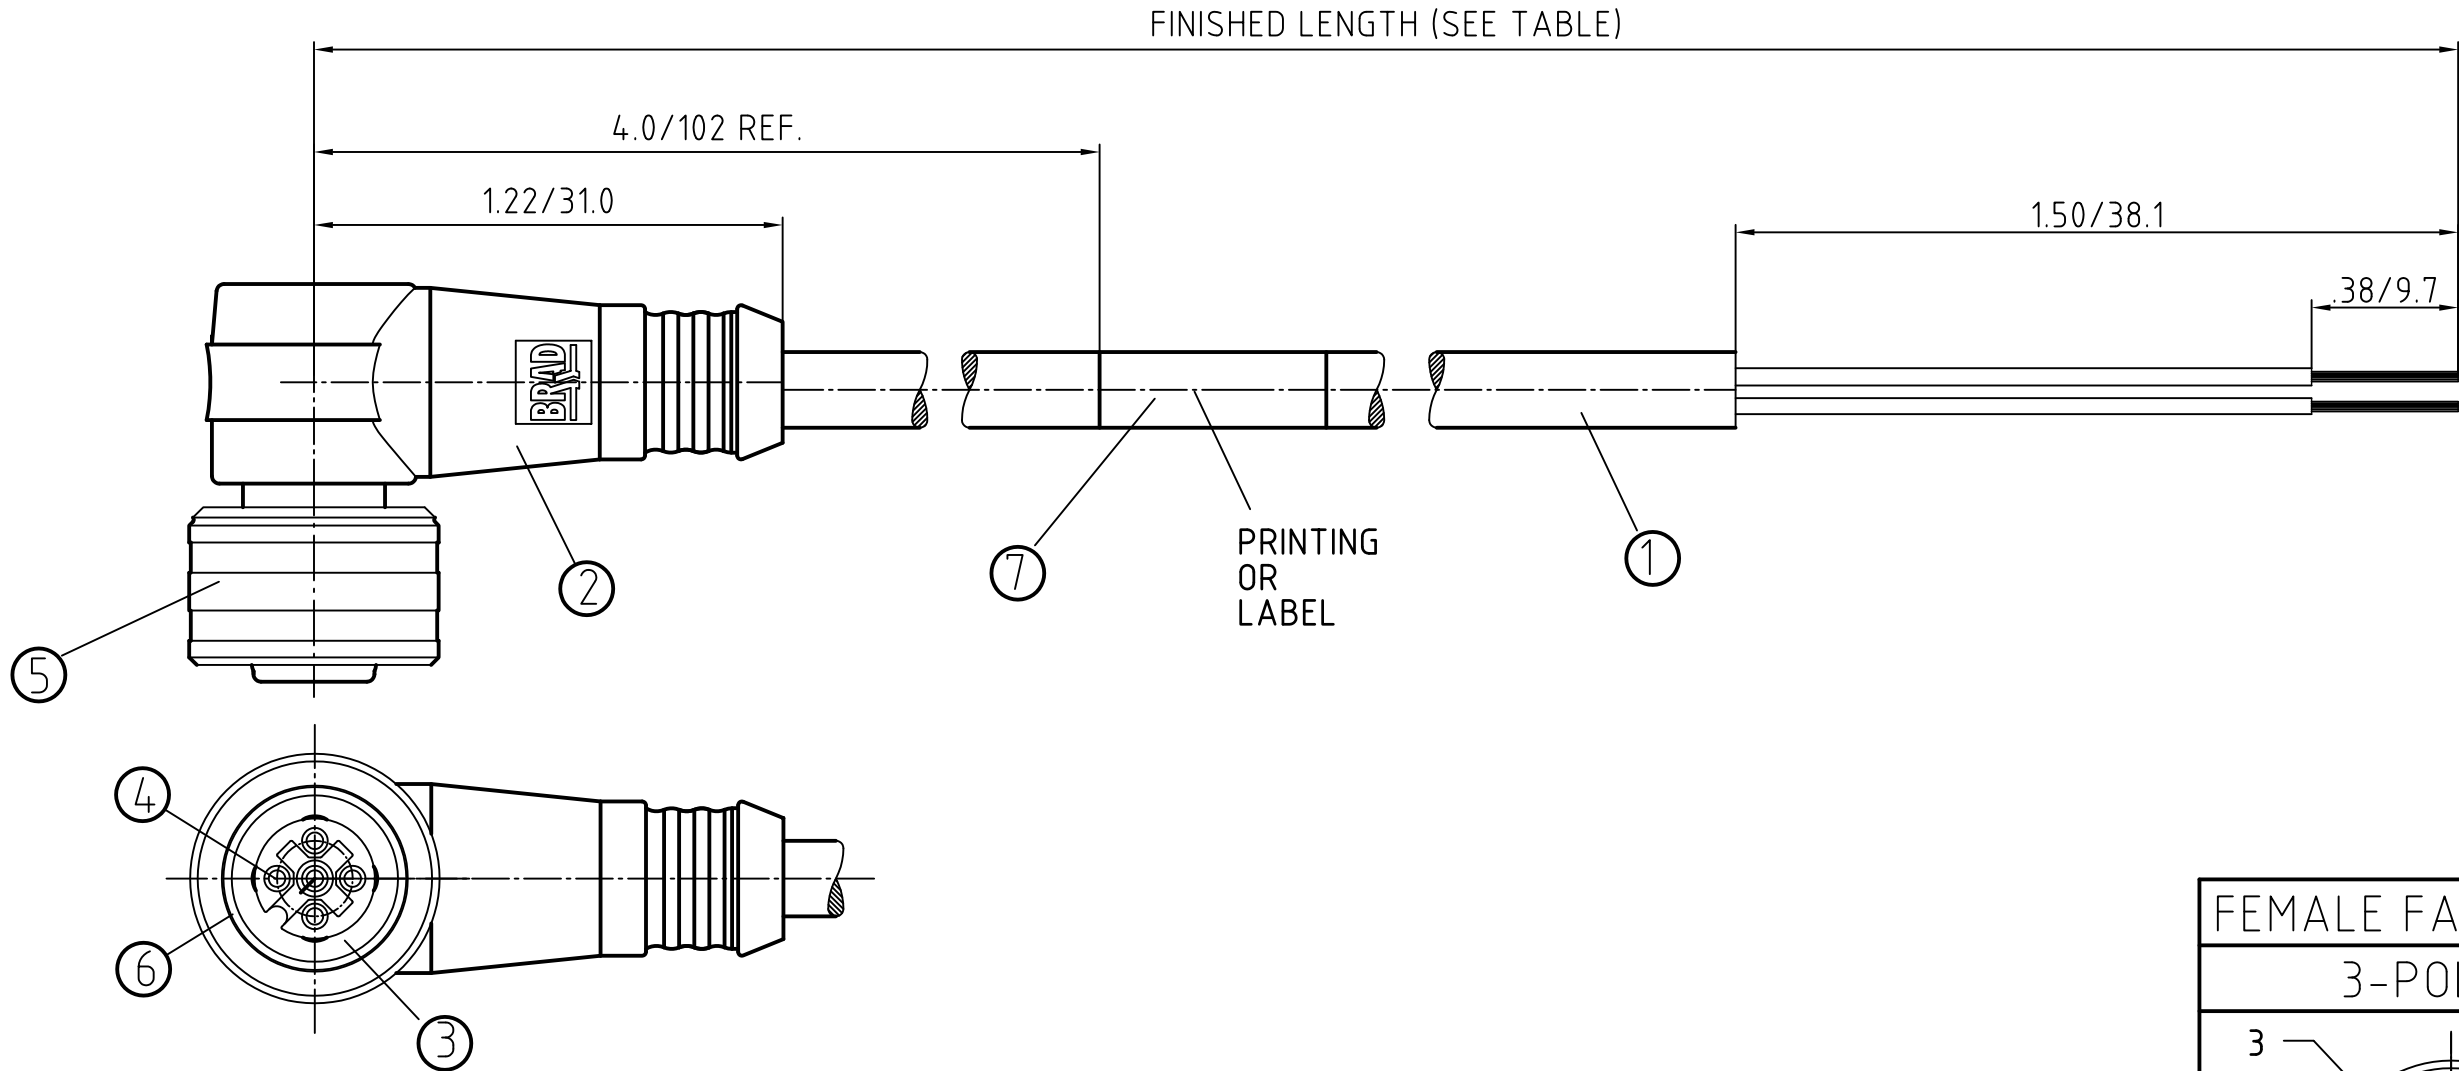

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67/68/69K
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
ASSEMBLY IS	RoHS COMPLIANT

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200790216	W03001A09M020	6.56' +3.5" -0 [2.0M +89 -0]

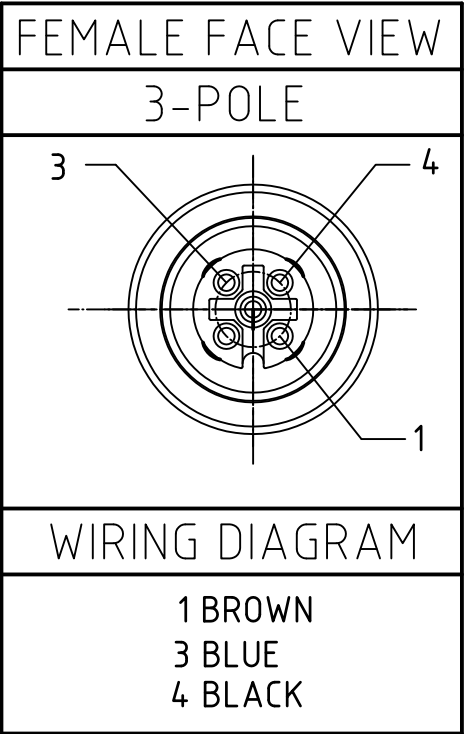

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	VITON	GREEN
5	COUPLER	BRASS	NICKEL PLATED
4	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	TPE (PUR)	YELLOW
1	CABLE- 22/3 AWG (COPPER STRANDING) 3 CONDUCT. 300V	JACKET: PVC	JACKET: YELLOW

DESCRIPTION EC NO: WEU2010-0350 DRWN: LSTEMMLE 2010/02/12 CHKD: NS APPR: FPACHER 2010/02/15	QUALITY SYMBOLS ▼ = 0 ▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY LSTEMMLE	DATE 2010/02/12	MICRO-CHANGE ULTRA LOCK 3-POLE FEMALE 90 #22/3 YELLOW PVC CABLE		
		4 PLACES	±---	±---	CHECKED BY FP	DATE 2010/02/12			
		3 PLACES	±---	±---	APPROVED BY FPACHER	DATE 2010/02/15	 MOLEX INCORPORATED		
		2 PLACES	±---	±.01	MATERIAL NO. SEE TABLE				DOCUMENT NO. SD-120079-027
		1 PLACE	±0.3	±---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
		ANGULAR ± --- °							

1	REV
---	-----