


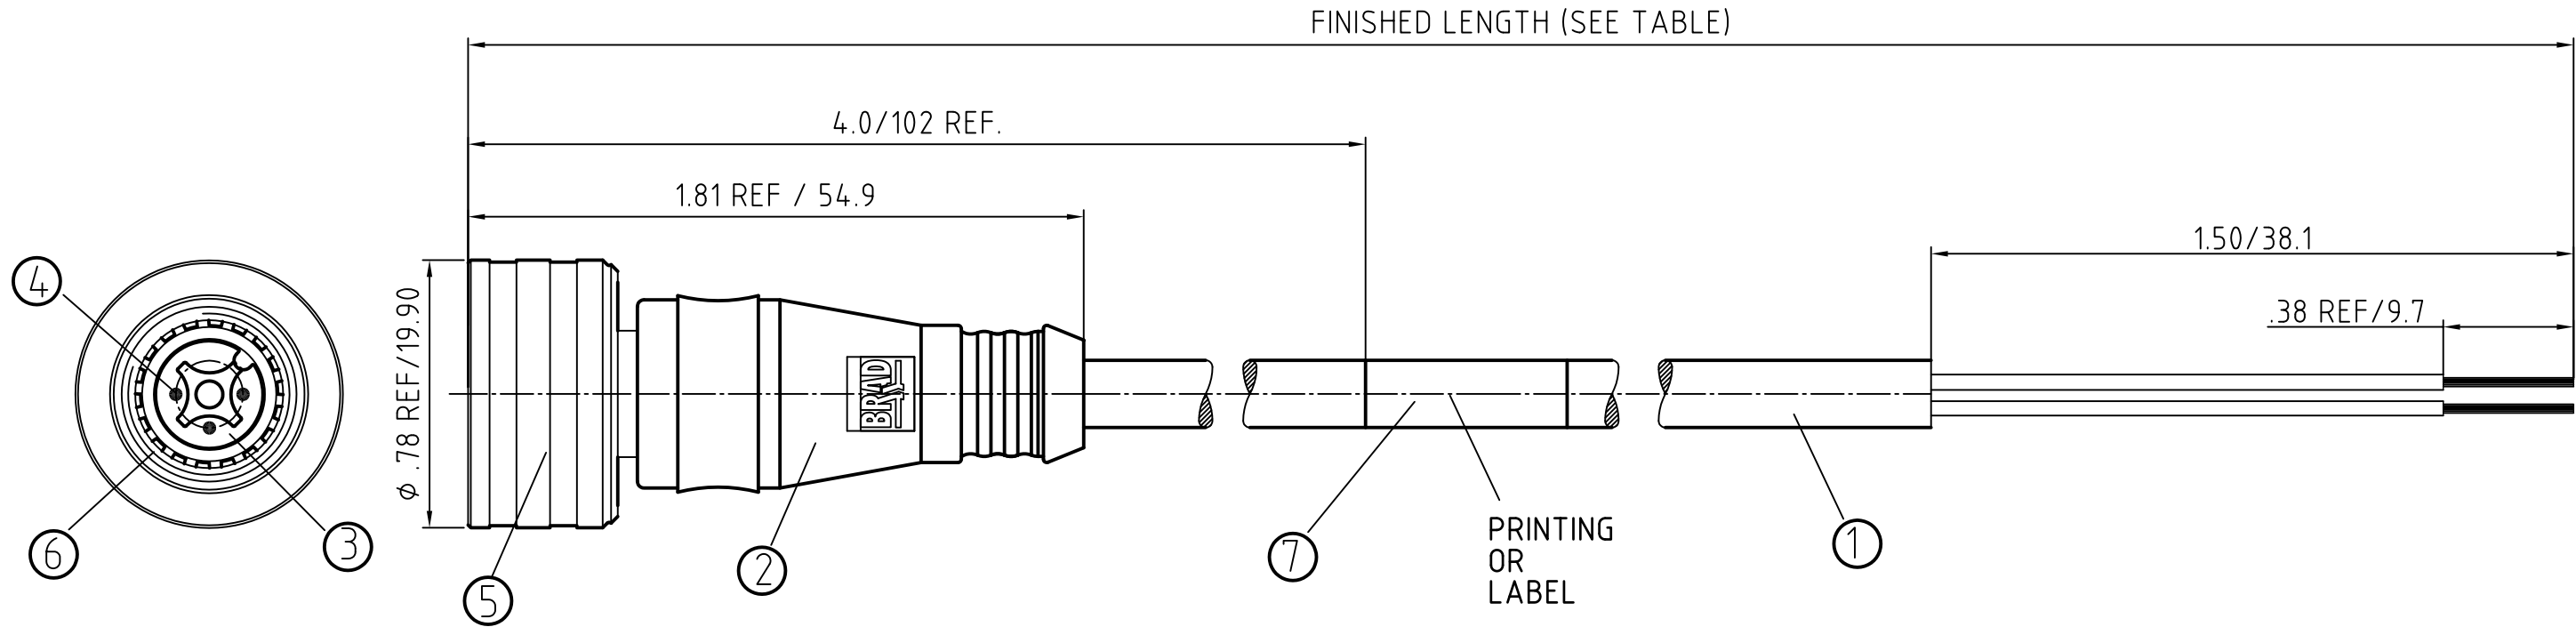



POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200790175	W03006A09M020	6.56' +3.5" -0 [2.0M +89 -0]

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67/68/69K
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
ASSEMBLY IS	RoHS COMPLIANT

ITEM	COMPONENT	MATERIAL	FINISH
7	LABLE	MYLAR	BLACK/YELLOW
6	O-RING	VITON	GREEN
5	COUPLER	BRASS	NICKEL PLATED
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	NYLON	BLACK
2	OVERMOLD	TPE (PUR)	YELLOW
1	CABLE- 22/3 AWG (COPPER STRANDING) 3 CONDUCT. 300V	JACKET: PVC	JACKET: YELLOW

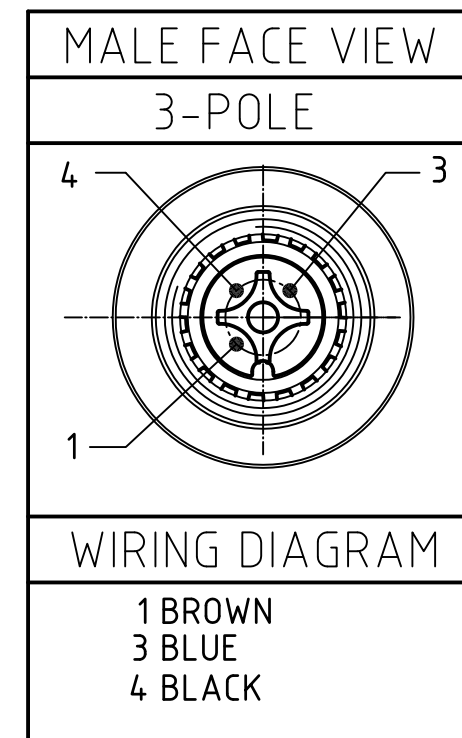

DESCRIPTION EC NO: WEU2010-0350 DRWN: LSTEMMLE 2010/02/10 CHKD: NS APPR: FPACHER 2010/02/15		QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION		
						IN/MM		2:1	METRIC			
			 = 0  = 0		mm	INCH	DRAWN BY	DATE	MICRO-CHANGE ULTRA LOCK 3-POLE MALE STRAIGHT #22/3 YELLOW PVC CABLE			
				4 PLACES	±---	±---	LSTEMMLE	2010/02/10				
				3 PLACES	±---	±---	CHECKED BY	DATE				
2 PLACES	±---	±.01		FP	2010/02/10							
	1 PLACE	±0.3	±---	APPROVED BY	DATE	molex MOLEX INCORPORATED						
ANGULAR ± --- °			FPACHER	2010/02/15								
1		REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
						SEE TABLE		SD-120079-023		1 OF 1		
						SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					