
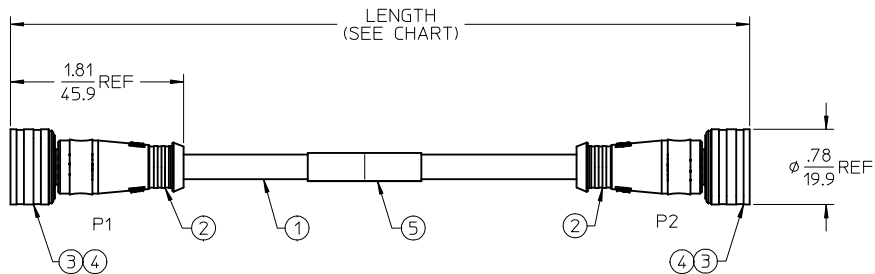


13	12	11	10	9
PART NUMBER	ENGINEERING NO.	LENGTH		
1201080066	EWWA06003M010	3' 3" +1.75 - 0 [1M +44.5MM - 0]		
1201080069	EWWA06003M050	16' 4" +6.0 - 0 [5M +150.0MM - 0]		

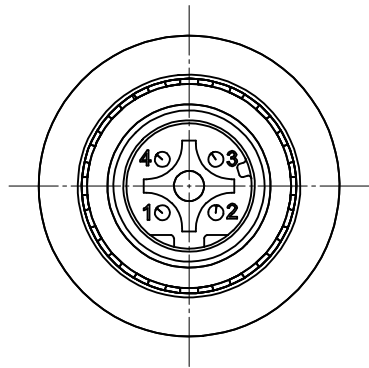

P1		P2
1	ORANGE	1
2	BLUE	2
3	ORG/WHITE	3
4	BLUE/WHITE	4

WIRING DIAGRAM

NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE.
- 4) MATES WITH: MICRO CHANGE, 4 POLE RECEPTACLE
- 5) ELECTRICAL DATA:
ACCORDING TO CAT5e ETHERNET STANDARD
INLINE CORDSET
MALE D-CODING TO MALE D-CODING
24AWG UNSHIELDED
POLES: 4
MAX. VOLTAGE: 125V
MAX. CURRENT 1.5A
CONTACT RESISTANCE: <5M Ohm
INSULATION WITHSTAND: >100M Ohm
PROTECTION IP67
TEMPERATURE RANGE: -25°C TO 75°C
UL E200650
- 6) PACKAGING:
CABLE ASSEMBLIES ARE BAGGED SEPERATELY
IN POLY BAGS WITH BAR CODE LABEL ATTACHED
TO OUTSIDE OF BAG.
- 7)ASSEMBLY IS RoHS COMPLIANT.

5	1	LABEL	PLASTIC FILM	BLACK/YELLOW
4	8	SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
3	2	M12 ULTRA-LOCK HEAD ASSY	TPE	BLACK
2	2	OVERMOLD	PVC	BLACK
1	1	ETHERNET CABLE-CAT5E	PVC JACKET	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASE DWG EC NO: WNA2009-0634 DRWN:RUPERT 2009/04/01 CHKD:WOODMAN APPR:JMURPHY 2009/04/08 A	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION 								
				mm	INCH	DRAWN BY B. RUPERT	DATE 03/30/09	TITLE MIC 4P M/MP ULOCK ST/ST									
			4 PLACES	± ---	± ---	CHECKED BY WOODMAN	DATE 03/30/09										
			3 PLACES	± ---	± ---	APPROVED BY JMURPHY					molex MOLEX INCORPORATED						
			2 PLACES	± ---	± ---												
			1 PLACE	± ---	± ---	MATERIAL NO. SEE CHART					DOCUMENT NO. SD-120108-010					SHEET NO. 1 OF 1	
			ANGULAR ±1/2°														
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												