
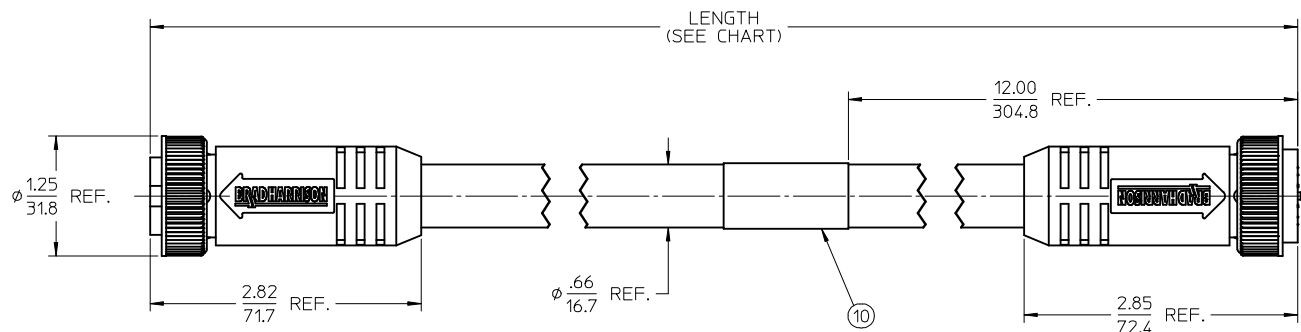



Section Z-Z

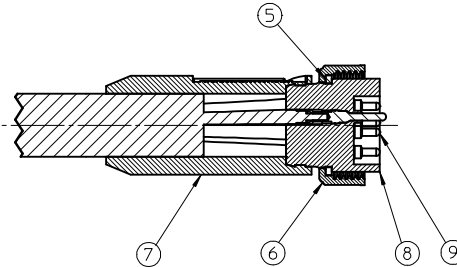

PART NUMBER	ENGINEERING NO.	LENGTH
1300120382	339020A01F030	3' 0" +1.75 - 0 [.9M +44.5 - 0]
1300120385	339020A01F060	6' 0" +2.19 - 0 [1.8M +55.6 - 0]
1300120389	339020A01F090	9' 0" +3.50 - 0 [2.7M +88.9 - 0]
1300120391	339020A01F120	12' 0" +3.50 - 0 [3.7M +88.9 - 0]
1300120393	339020A01F150	15' 0" +6.50 - 0 [4.6M +165.1 - 0]
1300120396	339020A01F200	20' 0" +6.50 - 0 [6.1M +165.1 - 0]
1300120398	339020A01F250	25' 0" +12.50 - 0 [7.6M +317.5 - 0]
1300120399	339020A01F300	30' 0" +12.50 - 0 [9.1M +317.5 - 0]
1300120401	339020A01F350	35' 0" +12.50 - 0 [10.7M +317.5 - 0]
1300120402	339020A01F400	40' 0" +12.50 - 0 [12.2M +317.5 - 0]
1300120403	339020A01F450	45' 0" +12.50 - 0 [13.7M +317.5 - 0]
1300120404	339020A01F500	50' 0" +24.50 - 0 [15.2M +622.3 - 0]
1300120407	339020A01F600	60' 0" +24.50 - 0 [18.2M +622.3 - 0]
1300120409	339020A01F750	75' 0" +24.50 - 0 [22.9M +622.3 - 0]

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. CABLE ASSEMBLIES ARE BAGGED SEPARATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
5. MATES WITH: MINI CHANGE, C-SIZE 9 POLE RECEPTACLE
6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V
CURRENT RATING: 7 AMPS
7. ASSEMBLY IS RoHS COMPLIANT

S2		P1
1	ORANGE	1
2	BLUE	2
3	RED/BLACK	3
4	GREEN/BLACK	4
5	WHITE	5
6	RED	6
7	GREEN/YELLOW	7
8	WHITE/BLACK	8
9	BLACK	9

WIRING DIAGRAM

10	1	LABEL	PLASTIC FILM	BLACK/YELLOW
9	9	PIN CONTACT	BRASS	GOLD PLATED
8	1	INSERT, MALE, 9 POLE	PVC	YELLOW
7	2	OVERMOLD	PVC	YELLOW
6	2	COUPLING NUT	ZINC DIE CAST	BLACK
5	2	FRICITION RING	NYLON	NATURAL
4	9	SOCKET CONTACT	BRASS	GOLD PLATED
3	9	SOCKET SLEEVE	STAINLESS STEEL	
2	1	INSERT, FEMALE, 9 POLE	PVC	YELLOW
1	1	CABLE, 16-9 ST00W/ST	PVC JACKET	YELLOW
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH




RELEASED
EC NO: WNA2009-0610
DRAWN:STONE 2009/03/26
CHKD:B. WOODMAN
APPR:J.MURPHY 2009/04/01

QUALITY SYMBOLS
▽=0
▽=0



GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± .01
1 PLACE ± 0.3 ± ---
ANGULAR ± 1/2°
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM
DRAWN BY R. STONE DATE 2009/03/24
CHECKED BY B. WOODMAN DATE 2009/03/25
APPROVED BY J. MURPHY DATE 2009/03/27
MATERIAL NO.
SEE CHART
SIZE C

SCALE 1:1
DESIGN UNITS INCH
THIRD ANGLE PROJECTION
MINI CHANGE CORD ASSY.
MFE, C-SIZE, 9 POLE
MOLEX INCORPORATED
SD-130012-001
SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

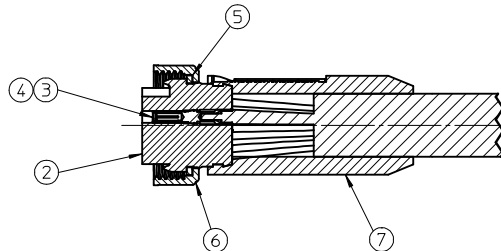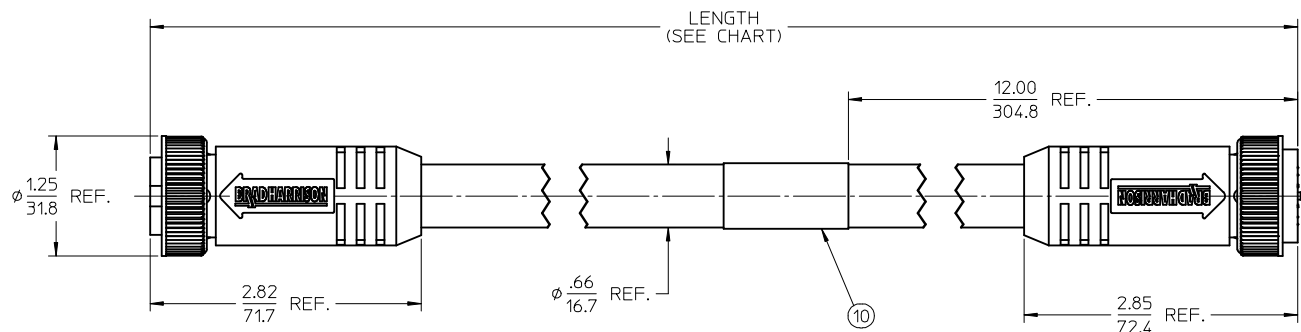

Section Z-Z

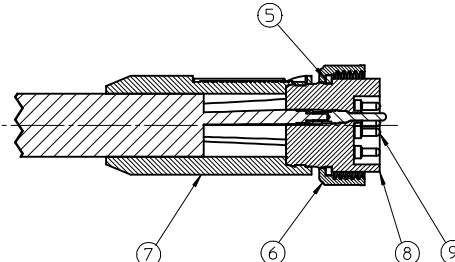

PART NUMBER	ENGINEERING NO.	LENGTH
1300120382	339020A01F030	3' 0" +1.75 - 0 [.9M +44.5 - 0]
1300120385	339020A01F060	6' 0" +2.19 - 0 [1.8M +55.6 - 0]
1300120389	339020A01F090	9' 0" +3.50 - 0 [2.7M +88.9 - 0]
1300120391	339020A01F120	12' 0" +3.50 - 0 [3.7M +88.9 - 0]
1300120393	339020A01F150	15' 0" +6.50 - 0 [4.6M +165.1 - 0]
1300120396	339020A01F200	20' 0" +6.50 - 0 [6.1M +165.1 - 0]
1300120398	339020A01F250	25' 0" +12.50 - 0 [7.6M +317.5 - 0]
1300120399	339020A01F300	30' 0" +12.50 - 0 [9.1M +317.5 - 0]
1300120401	339020A01F350	35' 0" +12.50 - 0 [10.7M +317.5 - 0]
1300120402	339020A01F400	40' 0" +12.50 - 0 [12.2M +317.5 - 0]
1300120403	339020A01F450	45' 0" +12.50 - 0 [13.7M +317.5 - 0]
1300120404	339020A01F500	50' 0" +24.50 - 0 [15.2M +622.3 - 0]
1300120407	339020A01F600	60' 0" +24.50 - 0 [18.2M +622.3 - 0]
1300120409	339020A01F750	75' 0" +24.50 - 0 [22.9M +622.3 - 0]

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. CABLE ASSEMBLIES ARE BAGGED SEPARATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
5. MATES WITH: MINI CHANGE, C-SIZE 9 POLE RECEPTACLE
6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 600V
CURRENT RATING: 7 AMPS
7. ASSEMBLY IS RoHS COMPLIANT

S2		P1
1	ORANGE	1
2	BLUE	2
3	RED/BLACK	3
4	GREEN/BLACK	4
5	WHITE	5
6	RED	6
7	GREEN/YELLOW	7
8	WHITE/BLACK	8
9	BLACK	9

WIRING DIAGRAM

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
10	1	LABEL	PLASTIC FILM	BLACK/YELLOW
9	9	PIN CONTACT	BRASS	GOLD PLATED
8	1	INSERT, MALE, 9 POLE	PVC	YELLOW
7	2	OVERMOLD	PVC	YELLOW
6	2	COUPLING NUT	ZINC DIE CAST	BLACK
5	2	FRICITION RING	NYLON	NATURAL
4	9	SOCKET CONTACT	BRASS	GOLD PLATED
3	9	SOCKET SLEEVE	STAINLESS STEEL	
2	1	INSERT, FEMALE, 9 POLE	PVC	YELLOW
1	1	CABLE, 16-9 ST00W/ST	PVC JACKET	YELLOW

RELEASED
EC NO: WNA2009-0610
DRAWN: STONE 2009/03/26
CHKD: B. WOODMAN
APPR: J. MURPHY 2009/04/01

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± .01
1 PLACE ± 0.3 ± ---
ANGULAR ± 1/2°
DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM
DRAWN BY R. STONE DATE 2009/03/24
CHECKED BY B. WOODMAN DATE 2009/03/25
APPROVED BY J. MURPHY DATE 2009/03/27
MATERIAL NO.
SEE CHART
SIZE C

SCALE 1:1
DESIGN UNITS INCH
THIRD ANGLE PROJECTION
MINI CHANGE CORD ASSY.
MFE, C-SIZE, 9 POLE
MOLEX INCORPORATED
SD-130012-001
SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION