
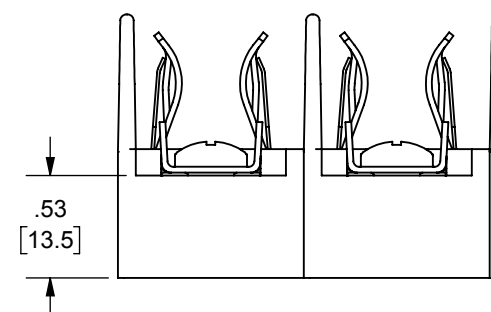
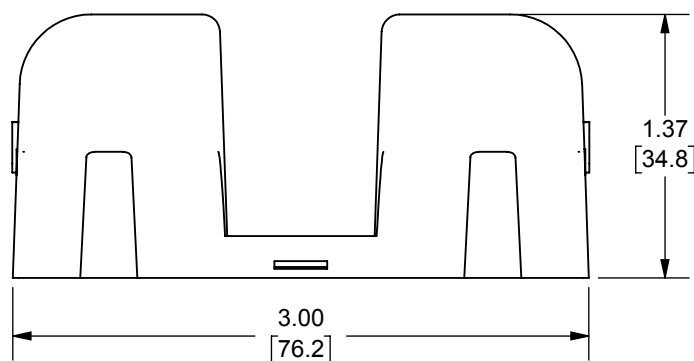


REV.	DATE	ECO	DESCRIPTION	BY	CK	APP
-	8/18/2020	N/A	REDRAWN	GDR	N/A	N/A

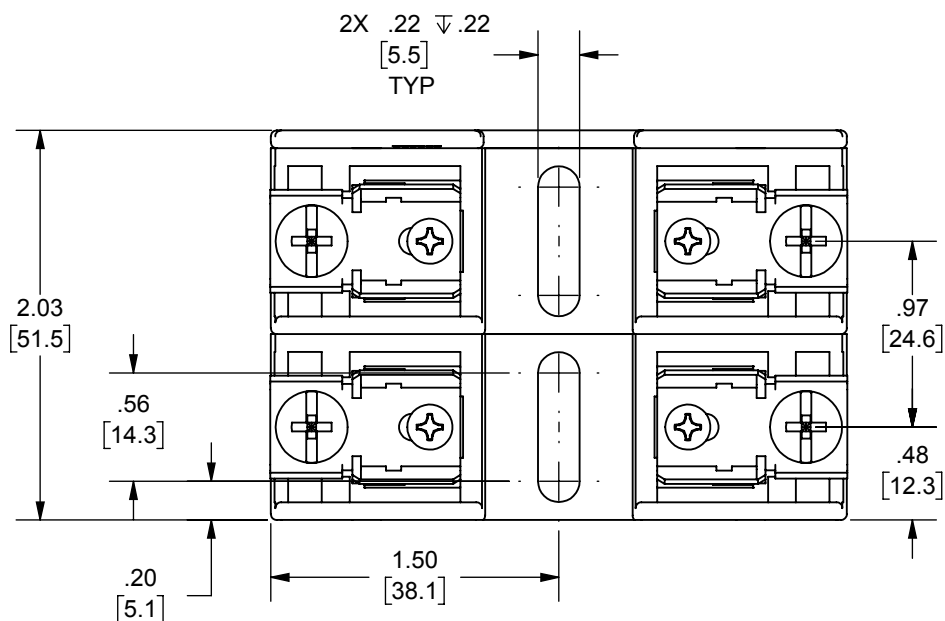

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL COMPOSITION AND RATING:
POLYCARBONATE-125°C RTI.

2 OMIT SPRING AND REJECTION.

3 OMIT REJECTION.

20317R		R	200K	20	60/75	CU ONLY	E52283	IZLT	LR32169
20317	3	H,K	10K						
20312	2								
P/N		FUSE CLASS	RMS SYM RATING	TORQUE (IN-LBS)	°C	TYPE	FILE NO.	GUIDE NO.	REPORT NO.
					WIRE		U/L	CSA	

P/N 20312
P/N 20317 SPRF
P/N 20317R SPRF

DIMENSIONS IN [] ARE MILLIMETERS

mercenMERSEN USA NEWBURYPORT-MA, LLC
374 MERRIMAC STREET
NEWBURYPORT, MA 01950

20312,20317,20317R

FUSE BLOCK, 2 P SCREW CONNECTOR

30A 250V

OUTLINE DIMENSIONS
NOT TO BE USED FOR PRODUCTION**05B0330**

SHEET 1 OF 1

PRODUCT MANAGER

SIGN: D.VANGARI

DATE: 8/31/2020

DESIGN ENGINEER

SIGN: M.RADZIM

DATE: 8/26/2020