

UL/CSA Ratings

- Max Amperage & Voltage** 200 A, 750 VDC
- Current Interruption Capability** Not for current interrupting
- Environmental Ratings** DSDC1 and DSDC3: Type 3R/IP54/IP55 (Standard) DSDC6, DSDC9 and DSDC2: Type 4X/IP69/IP69K (Standard)*
*Also meets IP66/IP67 requirements
- Temperature Range** Min -40°F/Max 140°F
See pg 254 for temperatures outside of this range.
- Wiring Capacity** Based on THHN wire sizes. DSDC1 Min 14 AWG Max 8 AWG DSDC3 Min 12 AWG Max 4 AWG DSDC6 Min 10 AWG Max 2 AWG DSDC9 Min 4 AWG Max 2/0 AWG DSDC2 Min 4 AWG Max 4/0 AWG
- Certifications** UL 1682 (130, 250 & 600 VDC) CSA C22.2 NO. 182.1 listed up to 250 VDC NOM
750 VDC devices pass UL testing, but are outside the scope of the standard so they cannot be listed.

Receptacle Options Part

Type 4X Watertightness (for DSDC1 and DSDC3)	Recept # -4X
Metal Pawl (on poly receptacle)	Recept # -824
Self-Returning Lid	Recept # -NC

DSDC2 models are also provided with a screw locking pawl to provide an alternative means of preventing accidental disconnection under load.

Inlet Options Part

Type 4X Watertightness	Inlet # -4X
With no Lockout Hole	Inlet # -A155

Receptacle (female)



Inlet (male)



! Don't forget to add installation accessories to your order

North American UL/CSA Configurations


VOLTAGE	POLARITY	PART #		PART #		
		POLY	METAL	POLY	METAL	
DSDC1	130 V/20 A	2P+G	33-14109	-	33-18109	-
DSDC3	130 V/30 A	2P+G	33-34109	-	33-38109	-
DSDC6	130 V/60 A	2P+G	33-64109	37-64109	33-68109	37-68109
DSDC9	130 V/100 A	2P+G	33-94109	37-94109	33-98109	37-98109
DSDC2	130 V/200 A	2P+G	-	37-24109	-	37-28109
DSDC1	250 V/20 A	2P+G	33-14209	-	33-18209	-
DSDC3	250 V/30 A	2P+G	33-34209	-	33-38209	-
DSDC6	250 V/60 A	2P+G	33-64209	37-64209	33-68209	37-68209
DSDC9	250 V/100 A	2P+G	33-94209	37-94209	33-98209	37-98209
DSDC2	250 V/200 A	2P+G	-	37-24209	-	37-28209
DSDC1	600 V/15 A	2P+G*	33-14058-S82	-	33-18058-S82	-
DSDC3	600 V/30 A	2P+G*	33-34058-S82	-	33-38058-S82	-
DSDC6	600 V/50 A	2P+G*	33-64058-S82	37-64058-S82	33-68058-S82	37-68058-S82
DSDC9	600 V/60 A	2P+G*	33-94058-S82	-	33-98058-S82	-
DSDC2	600 V/100 A	2P+G*	-	37-24058-S82	-	37-28058-S82
DSDC1	750 V/10 A	2P+G*	33-14158-S69	-	33-18158-S69	-
DSDC3	750 V/20 A	2P+G*	33-34158-S69	-	33-38158-S69	-
DSDC6	750 V/30 A	2P+G*	33-64158-S69	37-64158-S69	33-68158-S69	37-68158-S69

Notes: *Polarity for connection purposes. Devices have additional contacts used for load splitting. See information below.

For international configurations and ratings (IEC, CE) visit meltric.com/international-catalog or contact Customer Service at 800-433-7642.

Jumpers provided on 600 VDC and 750 VDC models

Jumpers are required on all 600 VDC and 750 VDC models as a safety precaution to split the arc in case of accidental disconnection under load. Plugs and receptacles are provided with jumpers installed. Receptacles utilize a jumper between N and L3 poles. Plugs utilize a jumper between L2 and N poles.

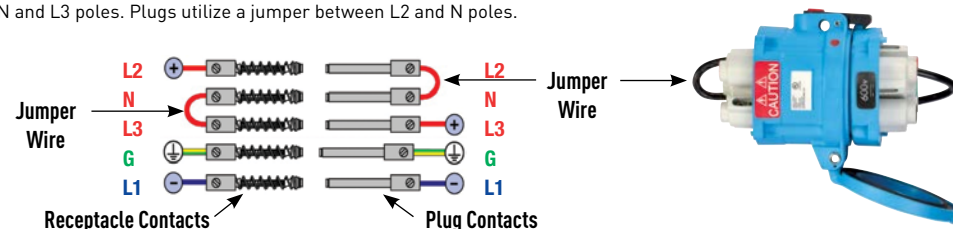

! See pages 231-240 for detailed information on these options



INSTALLATION ACCESSORIES

When properly installed, all accessories meet or exceed the environmental ratings of the devices they are mounted to; unless otherwise noted.

HANDLES	CABLE RANGE	POLY HANDLE	DSDC1, 3, 6 shown				DSDC9, 2 shown		
			1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"
DSDC1	.200-.820"	512P0D21	512P0N05 with drawplates	512P0N07 with drawplates	-	-	-	-	-
DSDC3	.390-1.180"	513P0D30	513P0N05	513P0N07	513P0N10	513P0N12	-	-	-
DSDC6	.511-1.377"	514P0D35	514P0N05	514P0N07	514P0N10	514P0N12	514P0N15	-	-
DSDC9	-	-	-	515P0N07	515P0N10	515P0N12	515P0N15	515P0N20	-
DSDC2	-	-	-	-	-	-	516P0N15	516P0N20	516P0N25

Notes: • Finger draw plates are recommended for easier connector closure on cord to cord assemblies.
• For available cord grips, see pg 159.

For metal accessories, see the cross-reference chart below.

BOXES	DSDC1, 3, 6 shown		DSDC9, 2 shown				
	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"
DSDC1	7T1F0N05	7T1F0N07	7T1F0N10	7T1F0N12	-	-	-
DSDC3	7T1F0N05	7T1F0N07	7T1F0N10	7T1F0N12	-	-	-
DSDC6	-	-	7T4F0N10	7T4F0N12	7T4F0N15	7T4F0N20	-
DSDC9	-	-	-	7T5F0N12	7T5F0N15	7T5F0N20	7T5F0N25
DSDC2	-	-	-	-	7T6F0N15	7T6F0N20	7T6F0N25

NPT on top or bottom (if rotated).
For other configurations, contact Customer Service.



Poly Conduit Box For poly devices only

	1/2"	3/4"	1"	1 1/4"
DSDC1	512B3N05	512B3N07	-	-
DSDC3	513B3N05	513B3N07	513B3N10	-
DSDC6	514B3N05	514B3N07	514B3N10	514B3N12

For DSDC dimensions and additional accessories use the cross-reference chart below.

	DIMENSIONS	ACCESSORIES
DSDC1	pg 55-56	pg 44
DSDC3	pg 55-56	pg 46
DSDC6	pg 55-56	pg 48
DSDC9	pg 55-56	pg 50
DSDC2	pg 55-56	pg 52

ANGLES

	POLY 30° ANGLE	METAL 30° ANGLE	METAL ANGLE FS/FD BOX 30°	METAL STRAIGHT ADAPTER	POLY 70°** WALL BOX
DSDC1	512M3	592M3	792M3FS*	592M0	512C7000
DSDC3	513M3	593M3	793M3FS*	593M0	513C7000
DSDC6	514M3	594M3	-	594M0	514C7000
DSDC9	515M3	595M3	-	595M0	-
DSDC2	-	596M6 (60°)	-	596M0	-

* M3FS base measures approximately 4.2" x 2.7". Due to the variation in sizes of FS boxes, please verify that your FS box matches our dimensions, if not call Customer Service for other solutions.
** 70° boxes do not have pre-drilled entry locations. Contact Customer Service if factory drilling is required.

MISC. ACCESSORIES



FINGER DRAWPLATES	PROTECTIVE INLET/PLUG CAP	POLY PADLOCKABLE INLET/PLUG CAP	SPRING-LOADED PADLOCKABLE INLET/PLUG CAP
61-3A346	31-1A426	DS1PC	31-1A226
61-6A346	31-3A426	DS3PC	31-3A226
31-6A346	31-6A426	DS6PC	31-6A226+
**	31-9A426	DS9MC***	-
**	39-2A426	DS2MC***	-

* Recommended for all assembly applications, for facilitated mating.
** An easy closing mechanism is standard on DSDC9 and DSDC2.
*** Padlockable Cap Aluminum - Not pictured.
+ For metal devices, replace "31" prefix with "39". Order with -A155 suffix.