



► Model PM22C

Panel Mount 22mm Multifunctional LED Audible/Visual Combination Signal

Model PM22C is a multifunctional panel mount LED and piezoelectric sounder combination that offers 7 different sound/flash pattern combinations, controllable via independent electric contacts. Combinations include 1) steady light only, 2) continuous sound only, 3) steady light + continuous sound, 4) strobe (300FPM) + intermittent tone SYNC, 5) 2x flash (60FPM) + 2x intermittent tone SYNC, 6) 3x flash (40FPM) + 3x intermittent tone SYNC and 7) random light + random tone.

Model PM22C available in 12-24VAC/DC and two electrical connection options: M12 Cable Gland with 12" (300 mm) leads or M12 4-Pin Quick Connect (-Q). It is panel mounted through a 22 mm/0.87" hole and secured with the provided locking ring.

The PM22 Series offers a self-extinguishing polycarbonate body that protects against vibrations, dust and other atmospheric elements.

FEATURES


- Available in 12-24VAC/DC
- 7 flash/tone combinations:
 - 1) steady light
 - 2) continuous tone
 - 3) steady light + tone
 - 4) strobe + intermittent tone SYNC
 - 5) 2x flash + 2x intermittent tone SYNC
 - 6) 3x flash + 3x intermittent tone SYNC
 - 7) random light + random tone
- Choice of M12 cable gland or M12 4-pin quick connect (-Q models) electrical connections
- 50,000 hour LED
- Opaque polycarbonate lens
- 360 degrees light-diffusing design
- Type 3R, IP65 enclosure
- CE Certified
- UL and cUL listed

MODEL	VOLTAGE	FLASH RATE/MINUTE (FLASH MODE)					DECIBELS MAXIMUM	
		STROBE	2X FLASH	3X FLASH	RANDOM	STEADY	10'	1M
PM22C-012-024*	12-24VAC/DC	300	60	40	N/A	N/A	82	92

* Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green, (R) Red and/or electrical connection: (-Q) Quick Connect (leave blank for M12 cable gland)

MAXIMUM OPERATING CURRENT (mA)			
12VDC	24VDC	12VAC	24VAC
45	45	90	110

Panel Mount 22mm Multifunctional LED Audible/Visual Combination Signal (PM22C)

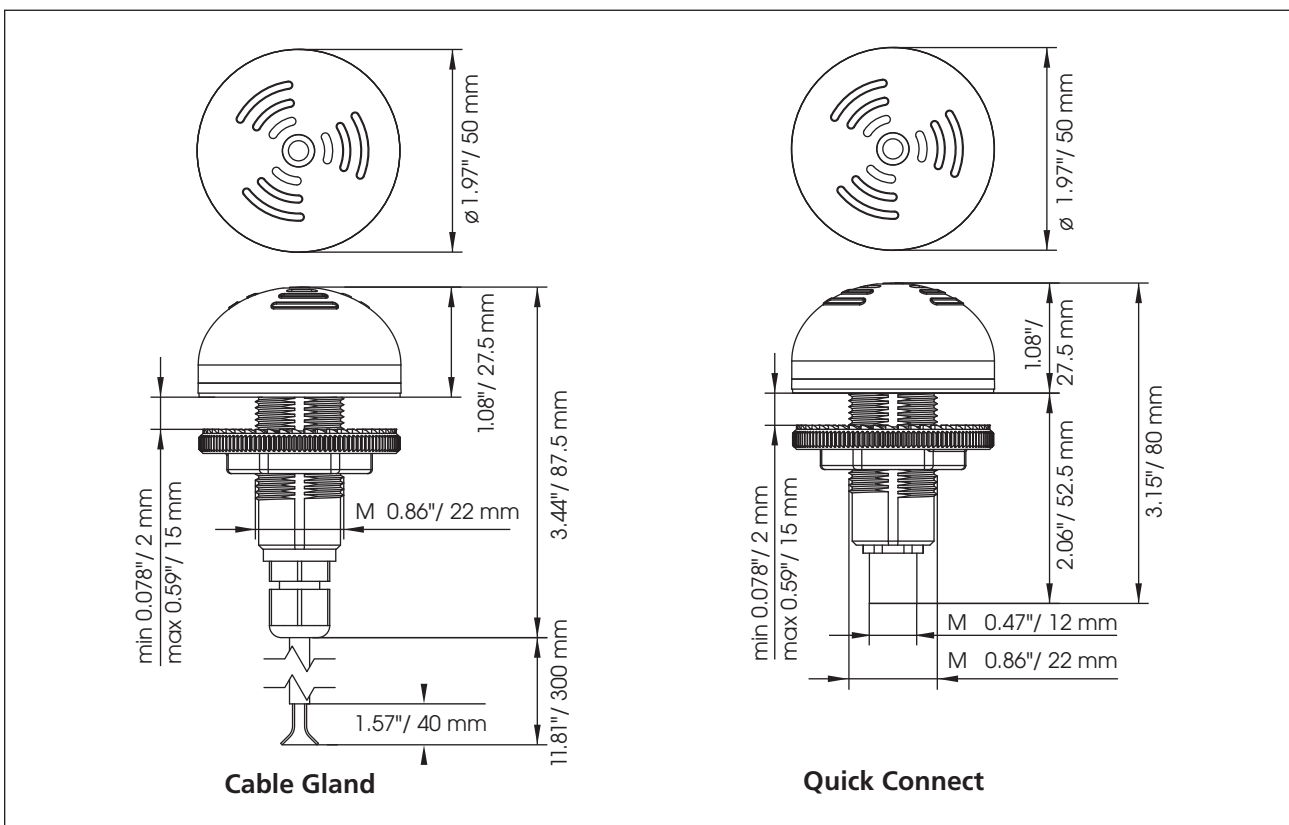

SPECIFICATIONS

Lamp Life:	50,000 Hours	
Light Source:	LED	
Operating Temperature:	-22°F to 122°F	-30°C to 50°C
Net Weight:	1.44 oz	0.04 kg
Shipping Weight:	15.44 oz	0.15kg

M12 Cable Gland**M12 Quick Connect**

Diameter	1.97"	50.0 mm	1.97"	50.0 mm
Height:	3.44"	87.5 mm	3.15"	80.0 mm
Height above surface:	1.08"	27.5 mm	1.08"	27.5 mm

HOW TO ORDER

