
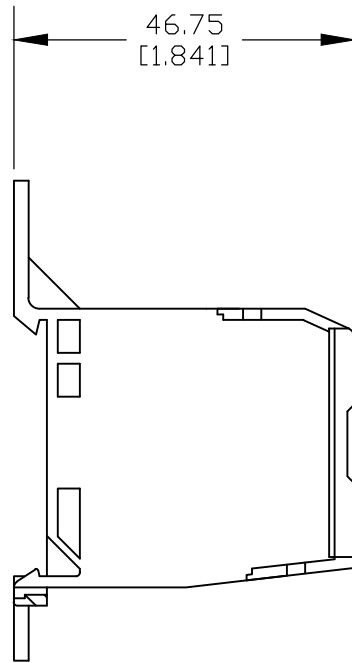
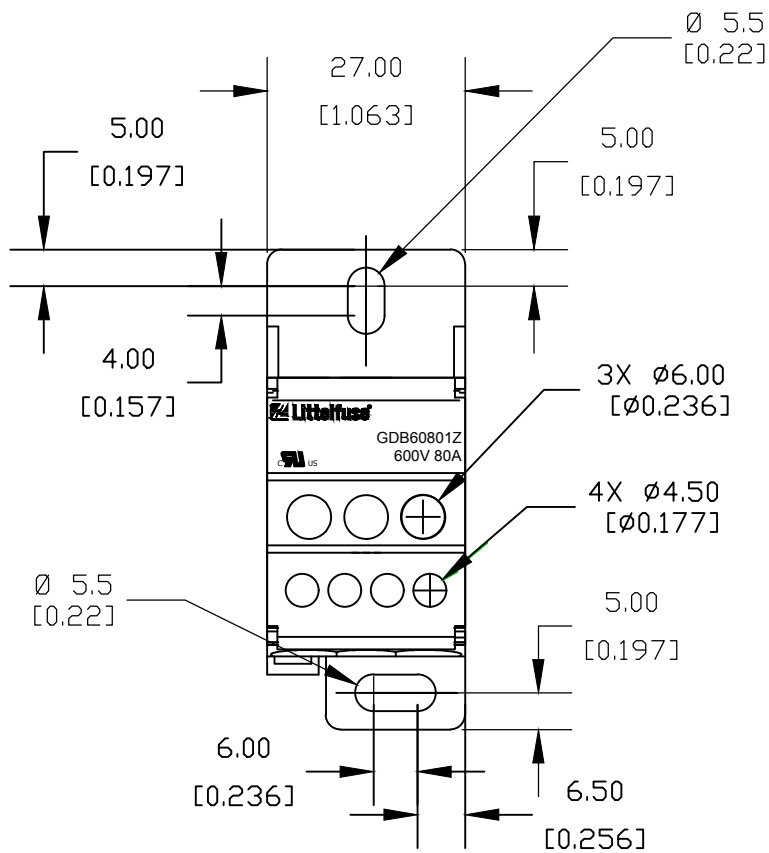
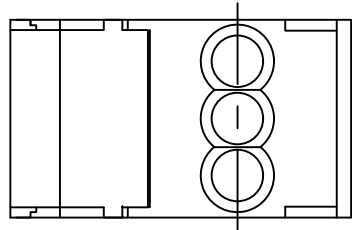
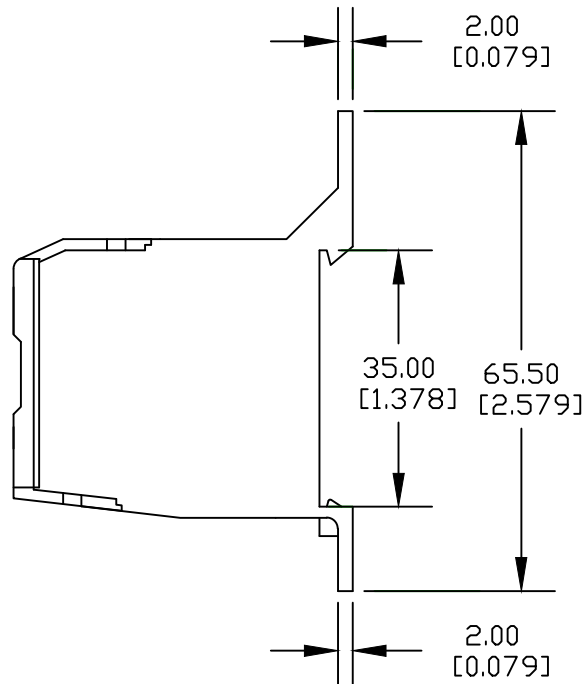


PART NO.
GDB60801Z

LTR	DATE	REVISION	CHK	APD
A	4/17/18	519180GCP - RELEASE MRY		

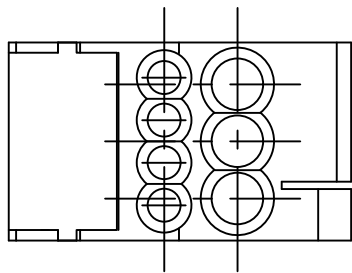

NOTES:

1. AGENCY INFORMATION:
UL FILE NO. E309688
2. MATERIALS:
INSULATOR-THERMOPLASTIC
CONNECTOR-BRASS
3. TERMINATION:
LINE: 8-14 AWG
LOAD: (2) 8-4 AWG
(4) 10-14 AWG
4. RATINGS:
600V
MAXIMUM AMP PER POLE-80A
5. TORQUE:
LINE: 13.5 IN-LB
LOAD: 8-4 AWG 13.5 IN-LB
10-14 AWG 7.2 IN-LB

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.							
●	DENOTES CRITICAL CHARACTERISTICS.						
CPK	DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE						
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.						
CP	DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.			C			
COPIES TO		MATL SPEC					
1	9	18	FINISH				
2	10	19					
3	12	20					
4	13	21	DRW	M YORK	DATE	04/09/18	SCALE
5	14	23	CHK		DATE		SUPER DR
6	15	33					
7	16	43	APPD		DATE		RAW STK WT
8	17	53					LBS/M
TITLE							
80A IEC DISTRIBUTION BLOCK OUTLINE							
 Littelfuse® CHICAGO, ILLINOIS 60631		REVISION	DRWG. NO.		FINAL		
		A	DL-GDB6080				

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED