

Catalog No. 2TLA050220R1224

Description: EStrongZ ESTOP 2NC/2NO NPT SS LED

UPC No 804325839075

Home > Machine Safety > Emergency Stops & Pilot Devices

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED


Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

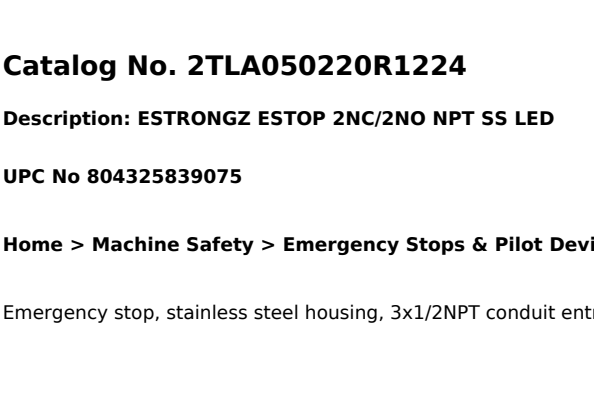

Descriptors

Category	Emergency Stops & Pilot Devices
Type	Emergency Stop

Specifications

Product Class	E-Stops & Pilot Devices
Product Main Type	EStrong
Supply Voltage	230VAC
Outputs	Contact
Degree of Protection	IP67, IP69K

Classifications

ETIM 4	EC002034 - Emergency stop complete
ETIM 5.0	EC002034 - Emergency stop complete
ETIM 6.0	EC002034 - Emergency stop complete
ETIM 7	EC002034 - Emergency stop complete
ETIM 8 (Etim8)	EC002034 - Emergency stop complete

Dimensions

Product Net Depth / Length	105 mm
Product Net Height	94 mm
Product Net Width	66 mm
Product Net Weight	1.1kg

Safety Information

Performance Level	Up to e
-------------------	---------

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

Emergency stop, stainless steel housing, 3x1/2NPT conduit entry, 2NC+2NO, with 230VAC LED

