

D

C

B

A

D

C





B

A

TECHNICAL DATA	T401200804X-000	T401200803X-000
RATED VOLTAGE	30V	60V
RATED CURRENT	3A	3A
POLLUTION DEGREE	3	3
OVERVOLTAGE CATEGOYR	II	II
MATERICAL GROUP	II	II
INSULATION RESISTANCE	>100MΩ	>100MΩ
DEGREE OF PROTECTION	IP67	IP67
OPERATION TEMPERATURE	-40~85°C	-40~85°C

TABLE 1

PBT	PRESS SCREW	6
PBT	RIGHT ANGLE PLASTIC HOUSING	5
BRASS	M8 SCTREW ASSY REC TERMINAL	4
BRASS	M8 SCREW ASSY OUT SCREW	3
BRASS	M8,FEMALE INSERT NUT	2
PA	M8,FEMALE HSG,A CODE,4PIN	1
	M8,FEMALE HSG,A CODE,3PIN	
MATERIAL	DESCRIPTION	ITEM

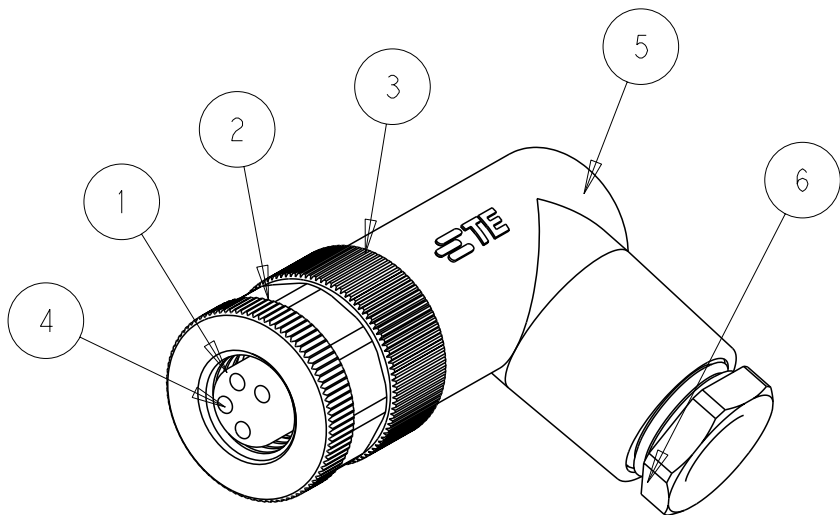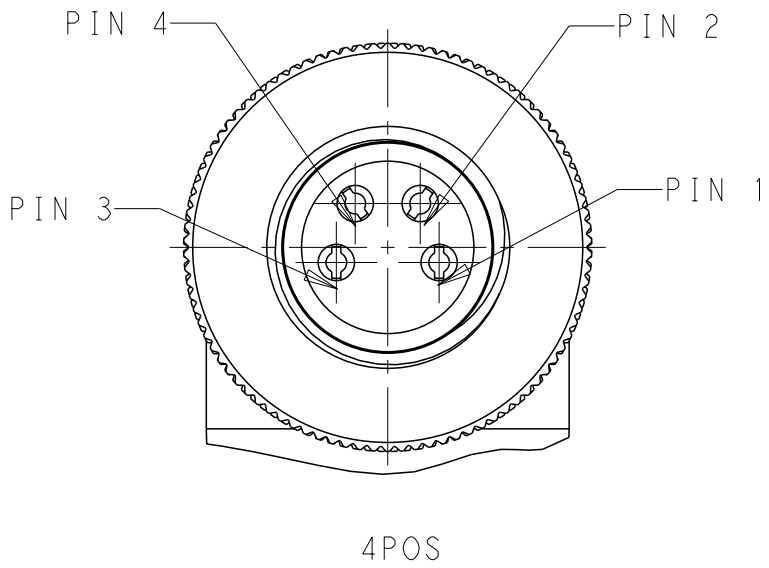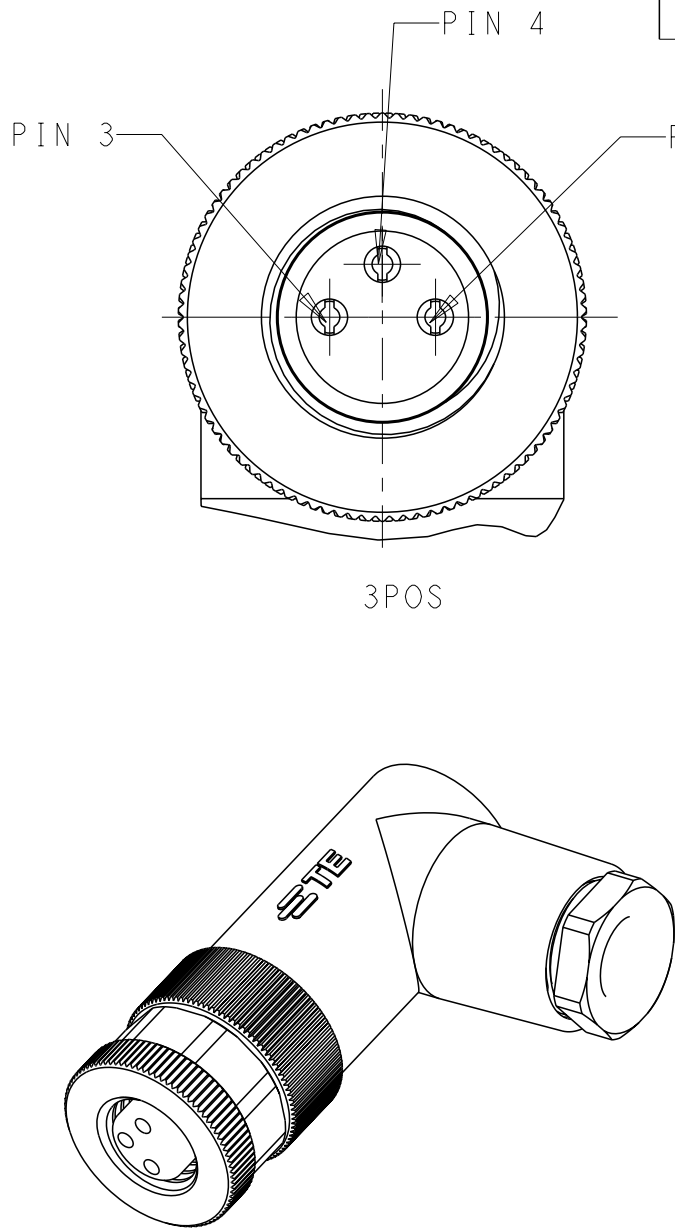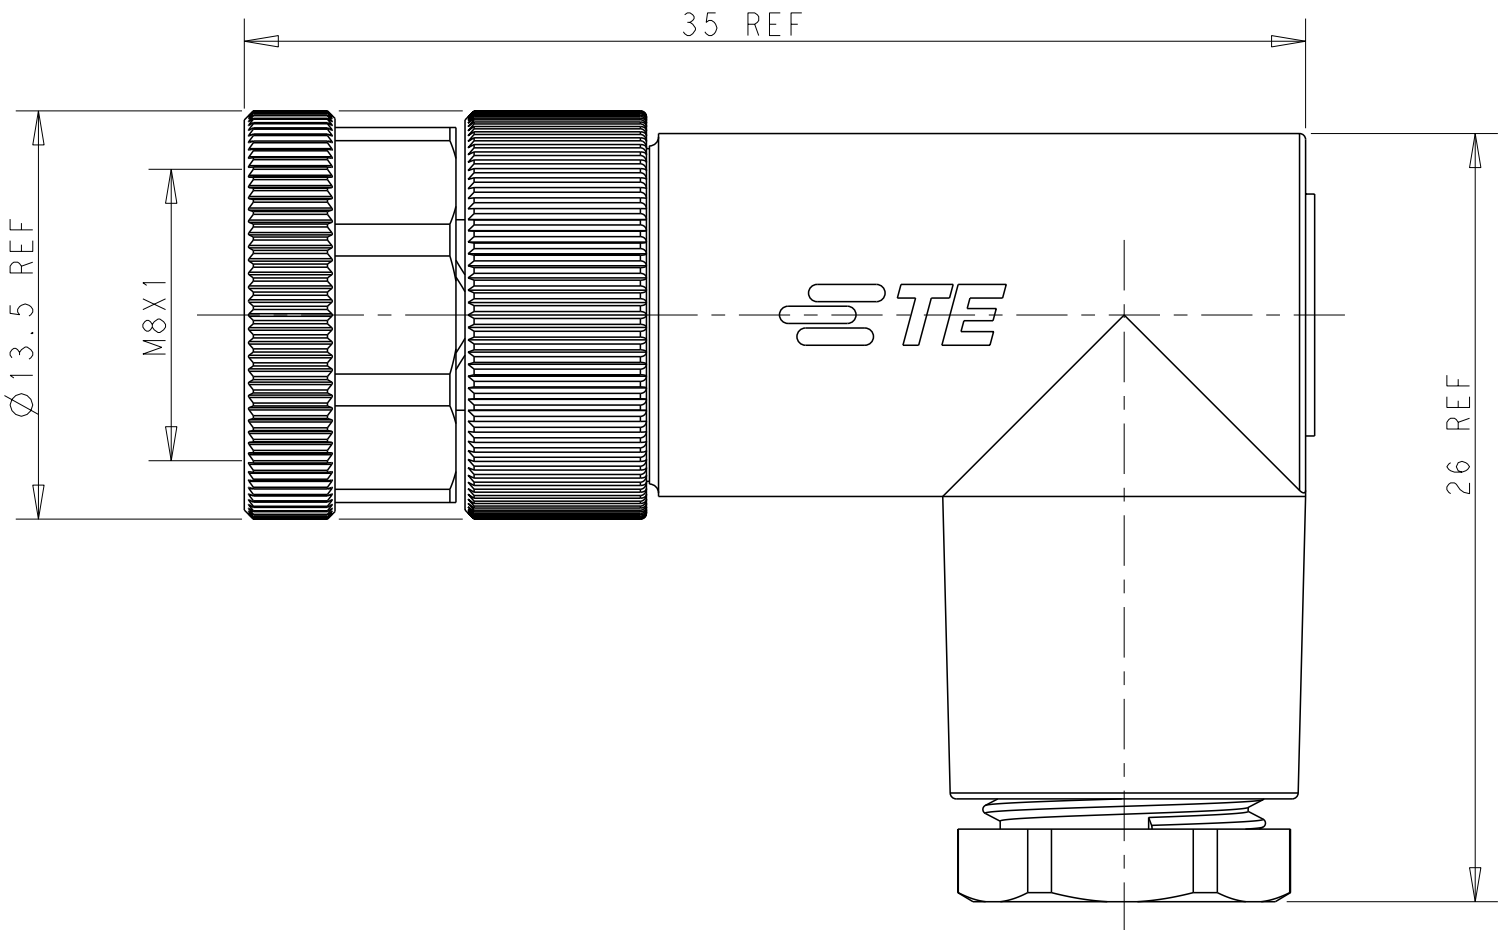

- NOTES;
- 1.PARTS MATERIAL DATA:SEE TABLE1
 - 2.CONTACT FINISH:
GOLD OVER NICKEL OR SILVER OVER NICKEL
 - 3.CABLE WIRES:
26AWG/0.14mm² Min & 24AWG/0.25mm² Max
 - 4.ALL DIMENSIONS ARE FOR NOMINAL REFERENCE ONLY UNLESS OTHERWISE STATE
 - 5.PACKAGIN: 1 PIECE IN A BAG
 - 6.PN INFORMATION FOR ASSEMBLY PARTS
T401200XXXX-000

CONTACT FINISH:
1:GOLD OVER NICKEL
2:SILVER OVER NICKEL

NUMBERS OFFPINS:
03:3 PINS
04:4 PINS
...

CABLE OUTLET:
8:PLASTIC/8(CABLE FEED:3.5~4.8mm)
9:METAL(CABLE FEED:3.5~5.0mm)
...

- 注意事项;
- 1.零件材料参见附表I
 - 2.表面处理:镀金
 - 3.适用线材:26AWG/0.14mm² Min & 24AWG/0.25mm² Max
 - 4.所有尺寸标注为基本参考,除非其它说明
 - 5.包装:每BAG装IPC
 - 6.料号数字代码参考上表

M8-FR-3CON-PG7-MU	T4012008031-000	1SET310009R0000
M8-FR-4CON-PG7-MU	T4012008041-000	1SET310010R0000
PRODUCT TYPE	TE PN	ENTRELEC PN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08JUN2021 BLAZE PENG	ENTRELEC Electrical Solutions			
DIMENSIONS: mm		CHK 08JUN2021 KEVIN HUANG				
		APVD 08JUN2021 CHRIS WANG	NAME M8 FEMALE SCREW ASSY RIGHT ANGLE UNSHIELDING CONNECTOR			
		PRODUCT SPEC 108-106140	-			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.20 2 PLC ±0.20 3 PLC ±0.20 4 PLC ±- ANGLES ±- FINISH		APPLICATION SPEC 114-137144-1	SIZE A2			
MATERIAL -		WEIGHT -	CAGE CODE -			
-		CUSTOMER DRAWING	DRAWING NO C-1SET310F05R0000			
		SCALE 2:1	SHEET 1 OF 1			
			REV A			