

D

C

B

A

D

C

B

A

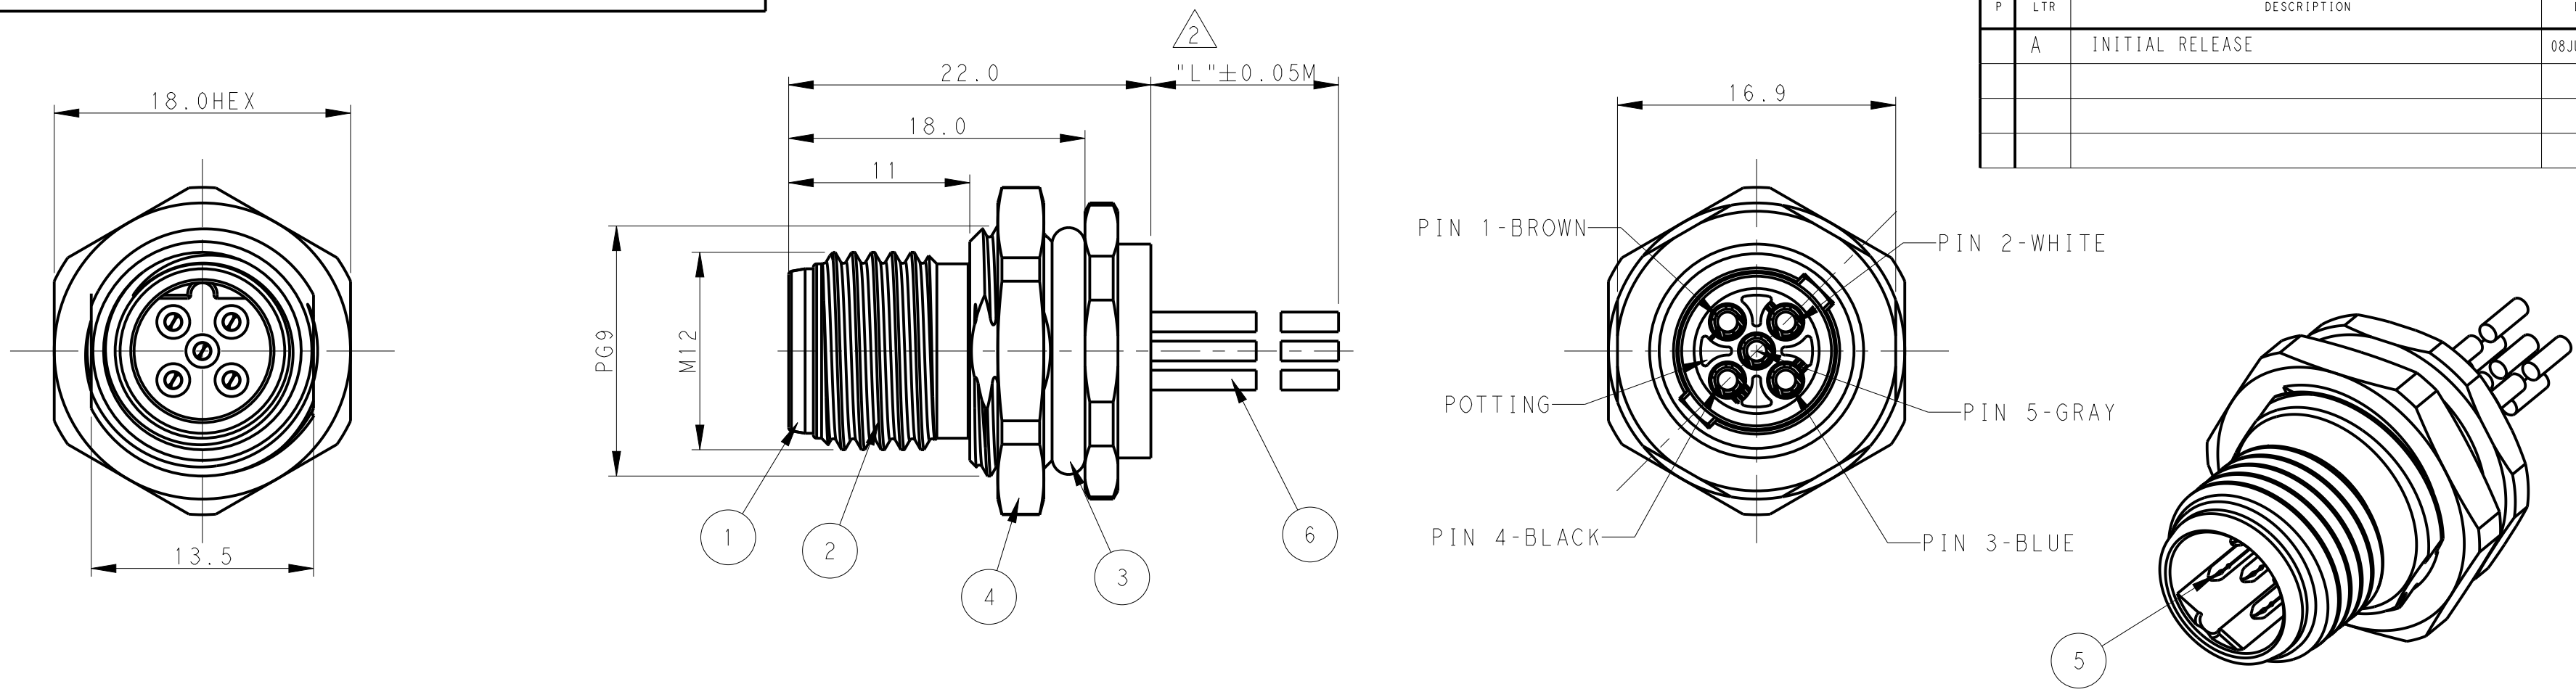


TABLE 1

TECHNICAL DATA	T4171010402-00X	T4171010403-00X	T4171010404-00X	T4171010405-00X
RATED VOLTAGE	250V	250V	250V	60V
RATED CURRENT	4A	4A	4A	4A
POLLUTION DEGREE	3	3	3	3
OVERVOLTAGE CATEGORY	II	II	II	II
MATERIAL GROUP	II	II	II	II
INSULATION RESISTANCE	>100MΩ	>100MΩ	>100MΩ	>100MΩ
DEGREE OF PROTECTION	IP67	IP67	IP67	IP67
OPERATION TEMPERATURE	-40~85°C	-40~85°C	-40~85°C	-40~85°C

NOTE:

1. TECHNICAL DATA: SEE TABLE 1

2. CABLE LENGHT(L):-00X
-001:0.2m;

3. RECOMMENDED MOUNT PANEL SEE DETAIL

4. ALL DIMENSIONS ARE FOR NOMINAL REFERENCE ONLY
UNLESS OTHERWISE STATED

注释:



1. 技术参数, 见表1

2. 线长(L):-00X
-001:0.2m;

3. 推荐开孔尺寸详见如图所示

4. 所有尺寸仅供参考, 除非另有说明


PIN ARRANGEMENT
B-CODE

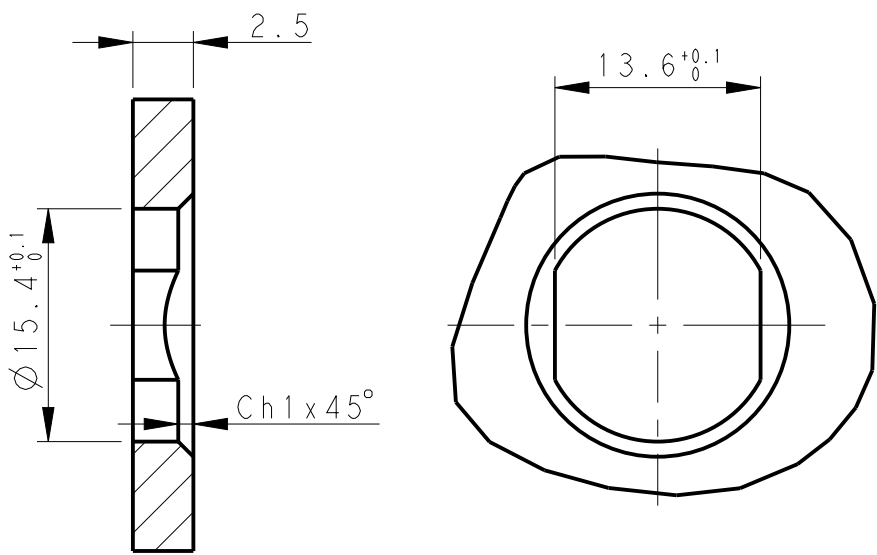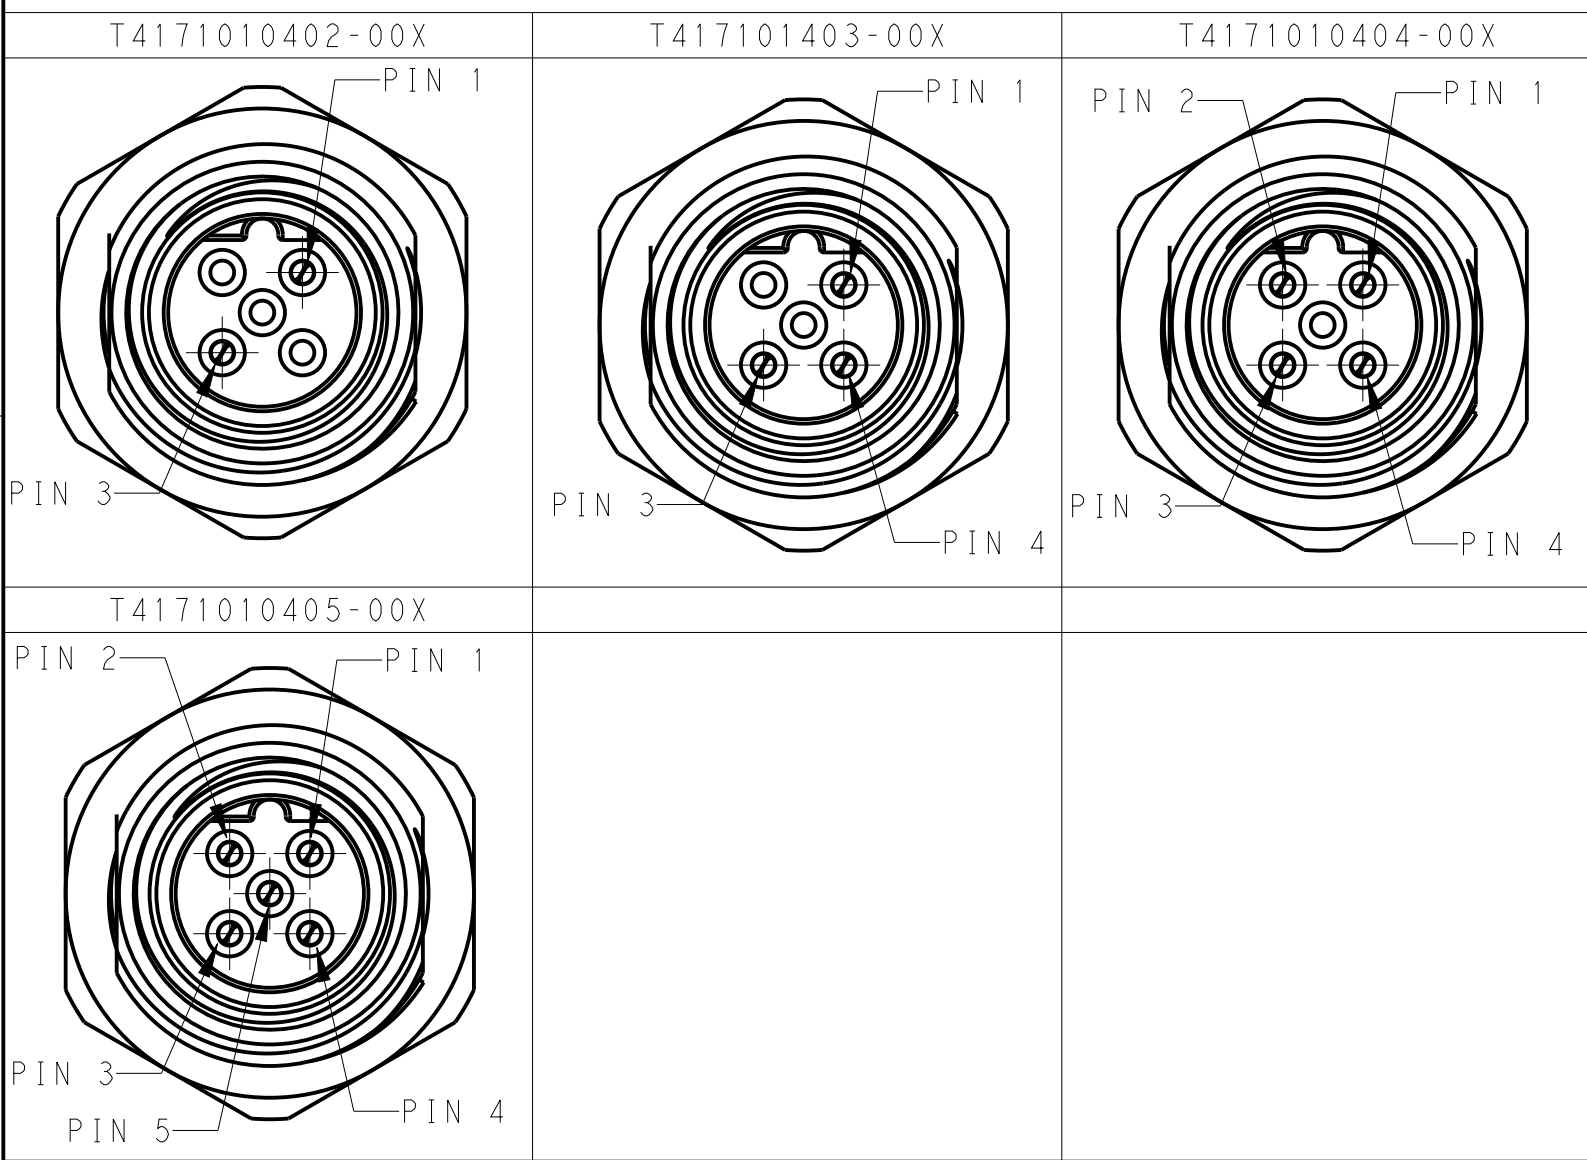

RECOMMENDED PANEL CUTOUT

M12B-MF-5CON-PG9-0.2LAU	T4171010405-001	1SET311073R0000
DESCRIPTION	TE PN	ENTRELEC PN

-	-	CABLE	6	2	3	4	5
FLASH GOLD	COPPER ALLOY	CONTACT	5	2	3	4	5
-	COPPER ALLOY	METAL NUT	4	1	1	1	1
BLACK	RUBBER	O-RING	3	1	1	1	1
-	COPPER ALLOY	M12,MALE,METAL BODY	2	1	1	1	1
BLACK	NYLON	M12,MALE HSG, B CODE, 5PINS	1	1	1	1	1
COMMENT	MATERIAL	DESCRIPTION	ITEM	T4171010402-00X	T4171010403-00X	T4171010404-00X	T4171010405-00X

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08JUN2021 GAVIN WANG	ENTRELEC Electrical Solutions			
DIMENSIONS: mm		CHK 08JUN2021 KEVIN HUANG				
		APVD 08JUN2021 CHRIS WANG	NAME M12 PANEL MOUNT CONNECTOR B CODE, MALE, REAR MOUNTING			
		PRODUCT SPEC 108-106140				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-137144	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
0 PLC ± 1 PLC ±0.2 2 PLC ±0.2 3 PLC ±0.2 4 PLC ± ANGLES ± FINISH ±		WEIGHT -	A2	-	C-1SET311P18R0000	
MATERIAL - -		CUSTOMER DRAWING	SCALE	SHEET	OF	REV
			3:1	1	1	A