
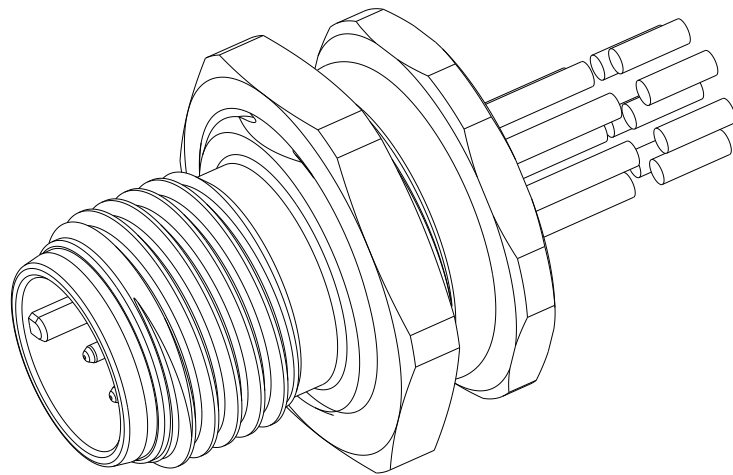
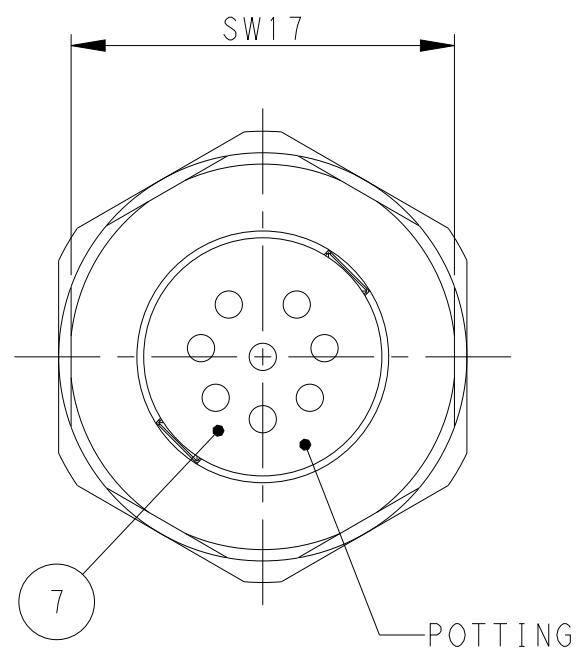
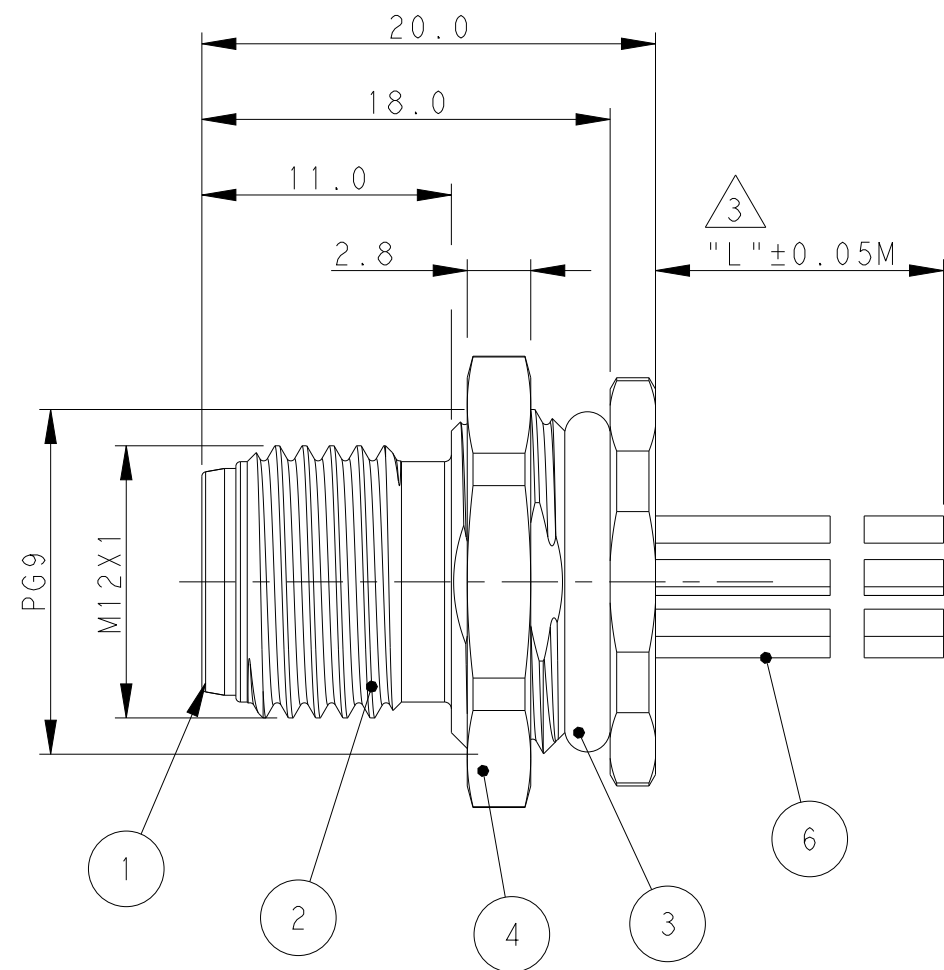


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION
© COPYRIGHT copyright.d8Ye-	ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	08JUN2021	G.W	C.W

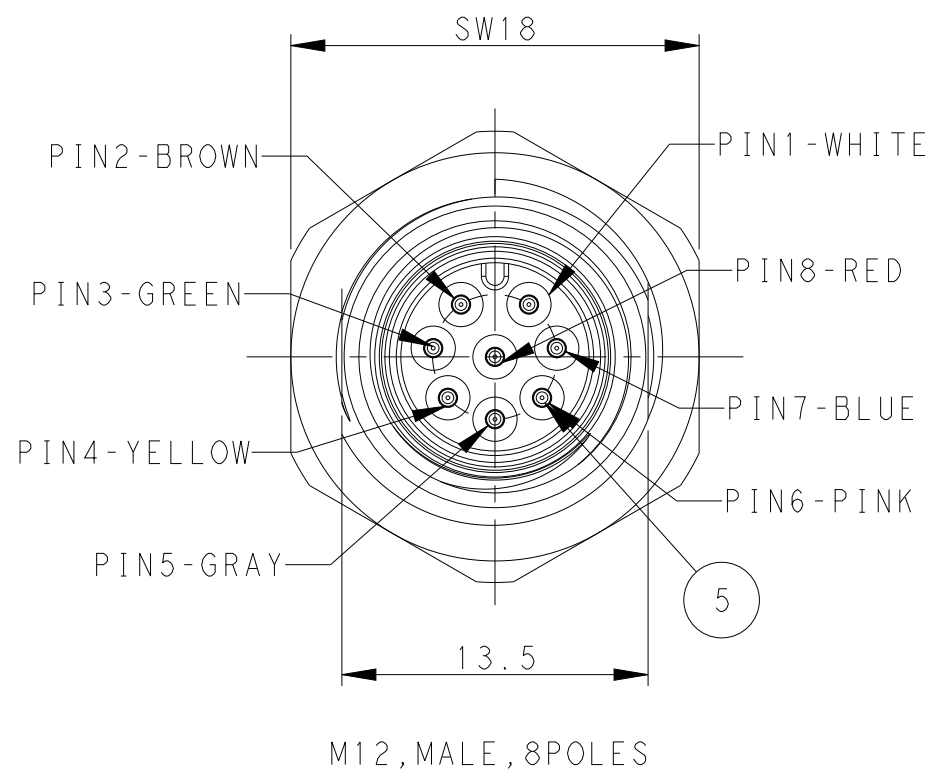

NOTE:

1. TECHNICAL DATA: SEE TABLE 1

2. RECOMMENDED MOUNT PANEL SEE DETAIL

3. CABLE LENGTH(L): -00X

001 . 0 . 211,

4. PACKAGING: 1 PIECE IN A BAG

5. ALL DIMENSIONS ARE FOR NOMINAL REFERENCE ONLY
UNLESS OTHERWISE STATED

注释：


| , 技术参数, 见表 |

2. 推荐开孔尺寸详见如图所示

△ 3. 线长 (L) : - 00 X :

4. 包装: 1 PCS / 袋

5. 所有尺寸仅供参考, 除非另有说明

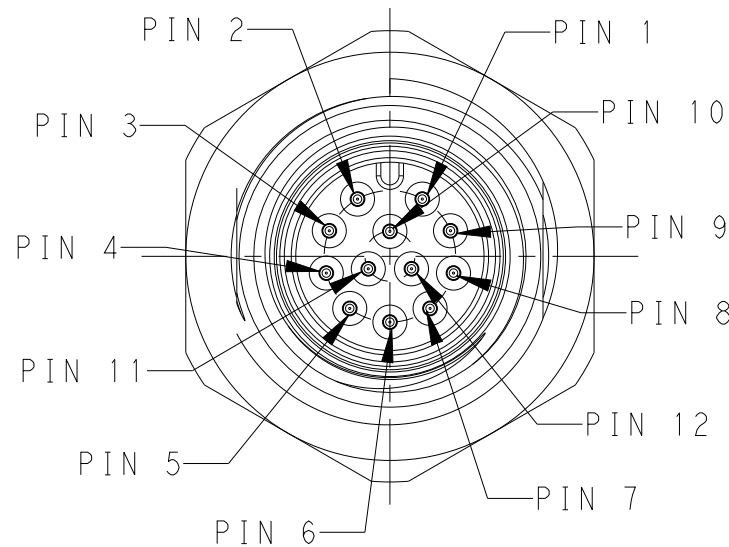


CIRCUIT DIAGRAM

M12, MALE, 12POLES

TABLE 1

TECHNICAL DATA	T4171020008-00X	T4171030012-00X
RATED VOLTAGE	30V	30V
RATED CURRENT	2A	1.5A
POLLUTION DEGREE	3	3
OVERVOLTAGE CATEGORY	II	II
MATERIAL GROUP	II	II
DEGREE OF PROTECTION	IP67	IP67
INSULATION RESISTANCE	>100MΩ	>100MΩ
OPERATION TEMPERATURE	-40~85℃	-40~85℃

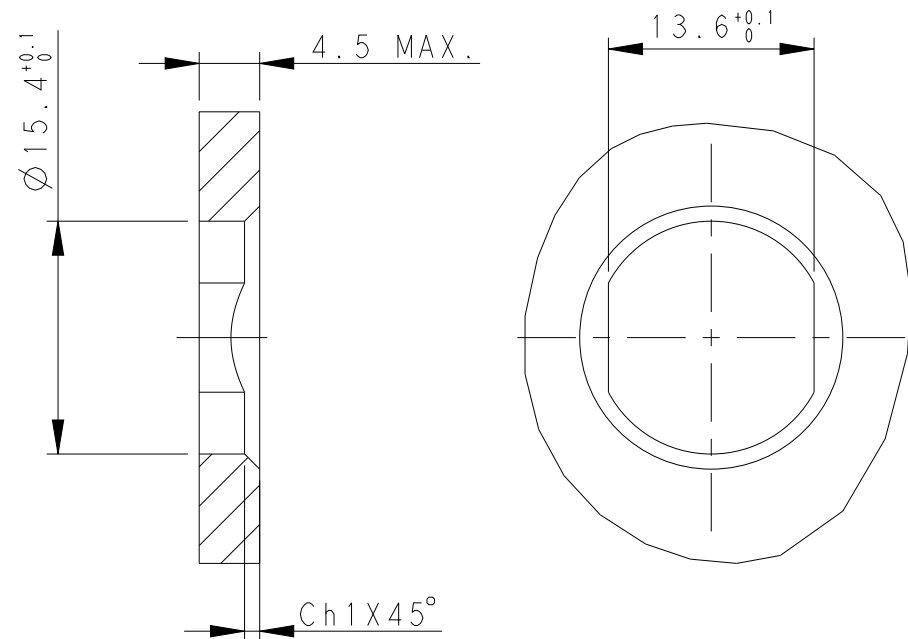

RECOMMENDED PANEL CUTOUT

M12-MF-8CON-PG9-0.2LAU	T4171020008-001	1SET311093R0000
M12-MF-12CON-PG9-0.2LAU	T4171030012-001	1SET311097R0000
DESCRIPTION	TE PN	ENTRELEC PN

-	EPOXY RESIN	POTTING ADHESIVE	7
-	-	CABLE	6
GOLD PLATED	COPPER ALLOY	CONTACT	5
NICKEL PLATED	COPPER ALLOY	METAL NUT	4
BLACK	RUBBER	O-RING	3
NICKEL PLATED	COPPER ALLOY	M12,MALE,METAL BODY	2
-	PA66	M12,MALE HSG	1
OTHERS	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08JUN2021 GAVIN WANG CHK 08JUN2021 KEVIN HUANG APVD 08JUN2021 CHRIS WANG		ENTRELEC Electrical Solutions	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		NAME M12 PANEL MOUNT CONNECTOR	
		PRODUCT SPEC 108-106140		A CODE, MALE, REAR MOUNT, WHIT WIRE	
MATERIAL - -		FINISH - -		SIZE A2	
		WEIGHT -		CAGE CODE -	
		CUSTOMER DRAWING		DRAWING NO C-1SET311P05R0000	
				RESTRICTED TO SCALE 3:1 SHEET 1 OF 1 REV A	