
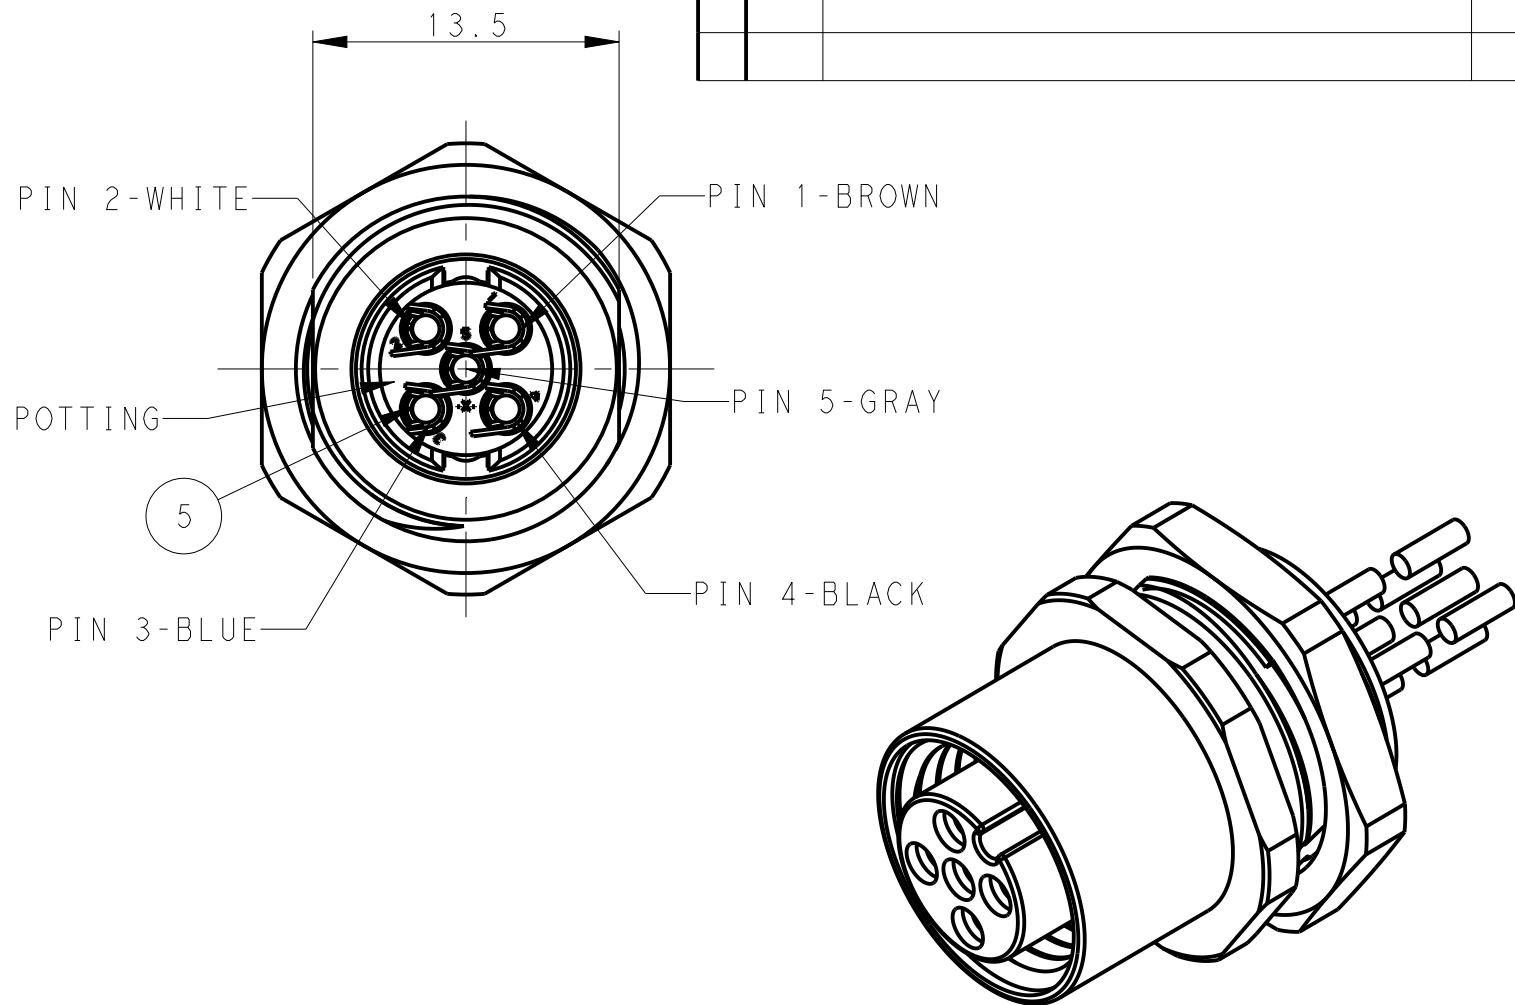
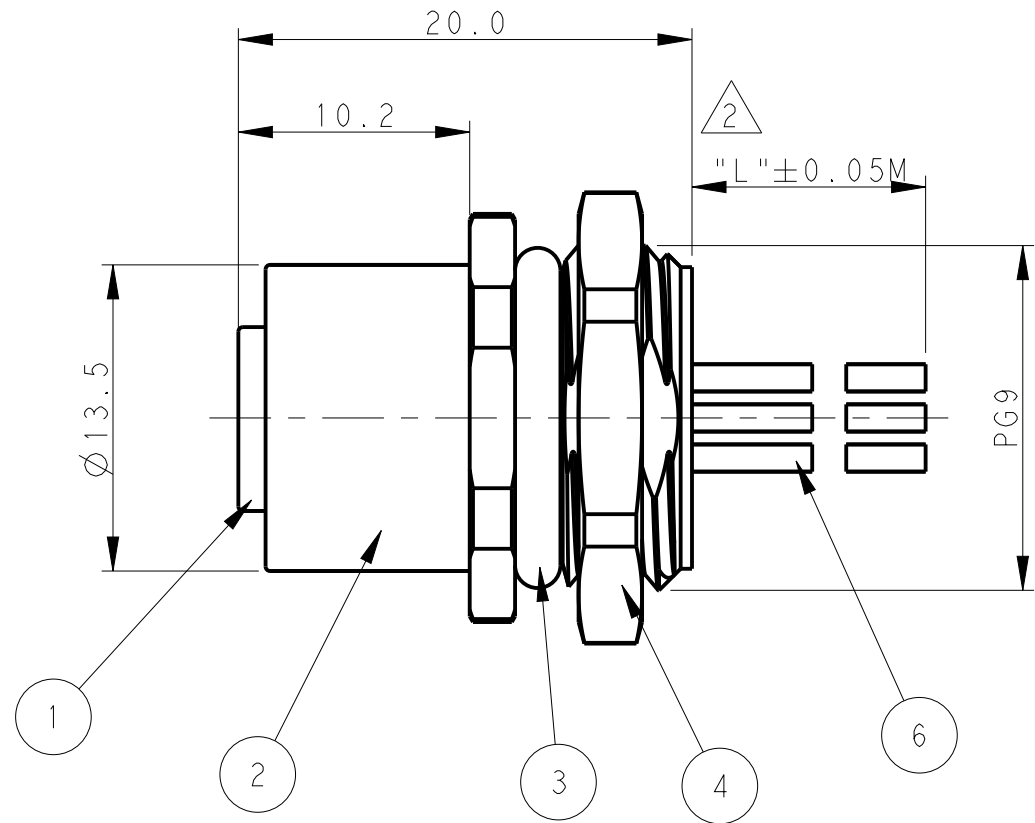


D

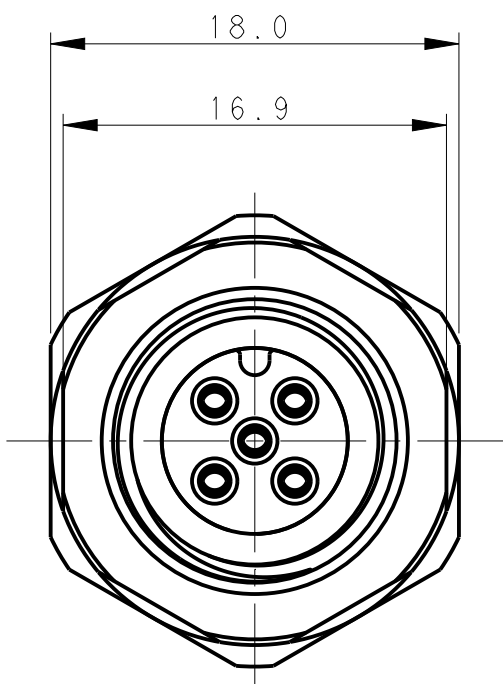

D

TABLE 1

TECHNICAL DATA	T4171310002-00X	T4171310003-00X	T4171310004-00X	T4171310005-00X
RATED VOLTAGE	250V	250V	250V	60V
RATED CURRENT	4A	4A	4A	4A
POLLUTION DEGREE	3	3	3	3
OVERVOLTAGE CATEGORY	II	II	II	II
MATERIAL GROUP	II	II	II	II
INSULATION RESISTANCE	>100MΩ	>100MΩ	>100MΩ	>100MΩ
DEGREE OF PROTECTION	IP67	IP67	IP67	IP67
OPERATION TEMPERATURE	-40~85°C	-40~85°C	-40~85°C	-40~85°C

NOTE:
1. TECHNICAL DATA: SEE TABLE 1

2. CABLE LENGHT(L):-00X
-001:0.2m;

3. RECOMMENDED MOUNT PANEL SEE DETAIL

4. ALL DIMENSIONS ARE FOR NOMINAL REFERENCE ONLY
UNLESS OTHERWISE STATED

注释:
1. 技术参数, 见表 1

2. 线长(L):-00X
-001:0.2m;

3. 推荐开孔尺寸详见如图所示

4. 所有尺寸仅供参考, 除非另有说明

C

B

PIN ARRANGEMENT
A-CODE


T4171310002-00X	T4171310003-00X	T4171310004-00X
T4171310005-00X		

B


M12-FB-4CON-PG9-0.2LAU	T4171310004-001	1SET311193R0000
M12-FB-5CON-PG9-0.2LAU	T4171310005-001	1SET311195R0000
DESCRIPTION	TE PN	ENTRELEC PN

-	-	CABLE	6	2	3	4	5
FLASH GOLD	COPPER ALLOY	CONTACT	5	2	3	4	5
-	COPPER ALLOY	METAL NUT	4	1	1	1	1
BLACK	RUBBER	O-RING	3	1	1	1	1
-	COPPER ALLOY	M12,MALE,METAL BODY	2	1	1	1	1
BLACK	NYLON	M12,MALE HSG, A CODE, 5PINS	1	1	1	1	1
COMMENT	MATERIAL	DESCRIPTION	ITEM	T4171310002-00X	T4171310003-00X	T4171310004-00X	T4171310005-00X

A

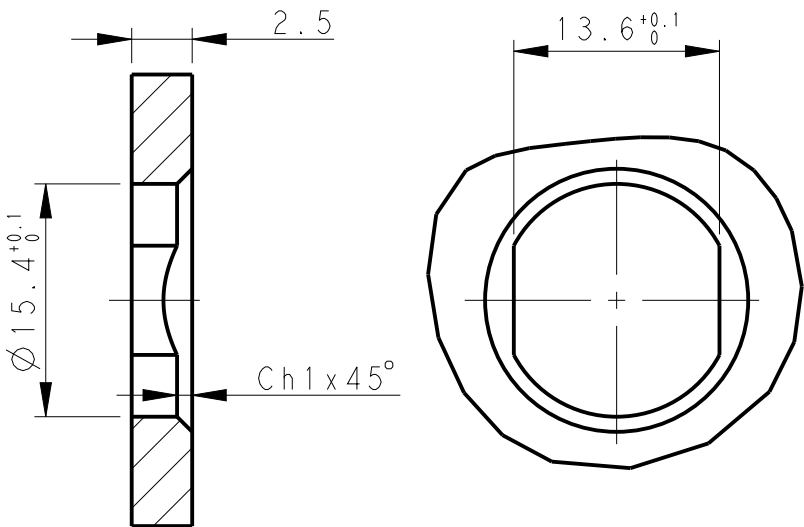

RECOMMENDED PANEL CUTOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GAVIN WANG 08JUN2021	ENTRELEC Electrical Solutions				
DIMENSIONS: mm		CHK KEVIN HUANG 08JUN2021					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD CHRIS WANG 08JUN2021					
		PRODUCT SPEC 108-106140	NAME M12 PANEL MOUNT CONNECTOR A CODE, FEMALE, FRONT MOUNTING -				
0 PLC ±: 1 PLC ±0.2 2 PLC ±0.2 3 PLC ±0.2 4 PLC ±: ANGLES ±:		APPLICATION SPEC 114-137144					
MATERIAL - -		WEIGHT -	SIZE A2	CAGE CODE -	DRAWING NO C=1SET311P11R0000	RESTRICTED TO -	
FINISH - -		CUSTOMER DRAWING			SCALE 3:1	SHEET 1 OF 1	REV A