



D

C

B

A

TECHNICAL DATA	T411141X02X-000	T411141X03X-000	T411141X04X-000	T411141X05X-000
RATED VOLTAGE	250V	250V	250V	60V
RATED CURRENT	4A	4A	4A	4A
POLLUTION DEGREE	3	3	3	3
OVERVOLTAGE CATEGORY	II	II	II	II
MATERIAL GROUP	II	II	II	II
INSULATION RESISTANCE	>100MΩ	>100MΩ	>100MΩ	>100MΩ
DEGREE OF PROTECTION	IP67	IP67	IP67	IP67
OPERATION TEMPERATURE	-40~85°C	-40~85°C	-40~85°C	-40~85°C

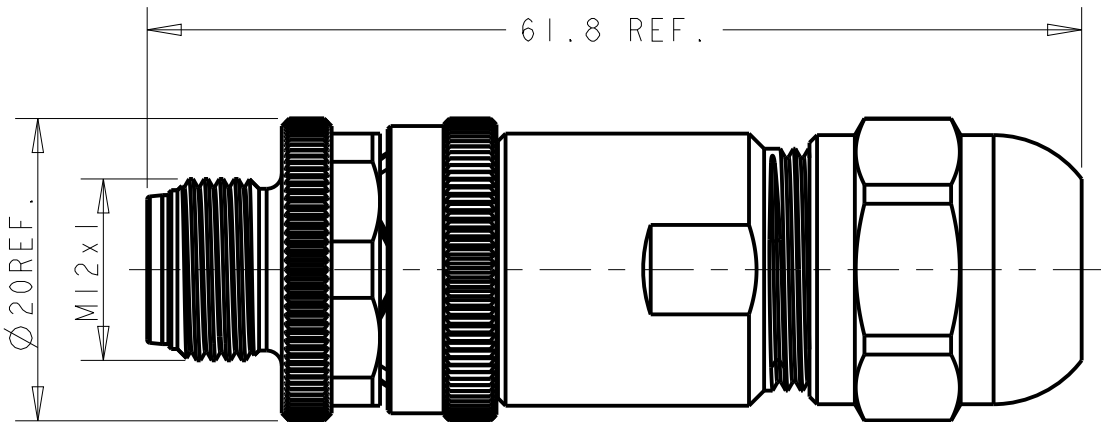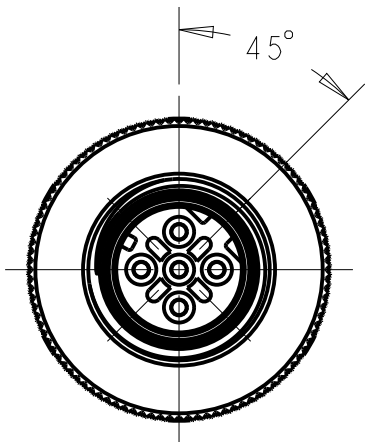


- NOTE:
- MATERIAL:
ITEM NO.1:NUT -BRASS
ITEM NO.2:HOUSING -PA
ITEM NO.3:CONTACT -BRASS
ITEM NO.4: HOUSING BODY: BRASS
 - CONTACT FINISH:
GOLD OVER NICKEL OR SILVER OVER NICKEL
 - CABLE WIRES:
18AWG/0.75mm² Max. FOR 2-5 PINS
20AWG/0.50mm² Max. FOR 8 PINS
 - ALLDIMENSIONS ARE FOR NOMINAL REFERENCE ONLY UNLESS OTHERWISE STATED
 - PACKAGEING: 1PIECE IN A BAG
 - PN INFORMATION

T411151XXX-000

- CONTACT FINISH:
1: GOLD OVER NICKEL
2: SILVER OVER NICKEL
- NUMBERS OF PINS:
02: 2 PINS
03: 3PINS
04: 4 PINS
05: 5PINS
08: 8 PINS
- CABLE OUTLET:
1: PG7(CABLE FEED: 4-6mm)
2: PG9(CABLE FEED: 6-8mm)

PIN ARRANGEMENT D-CODE		
T411151X02X-000	T411151X03X-000	T411151X04X-000
T411151X05X-000		

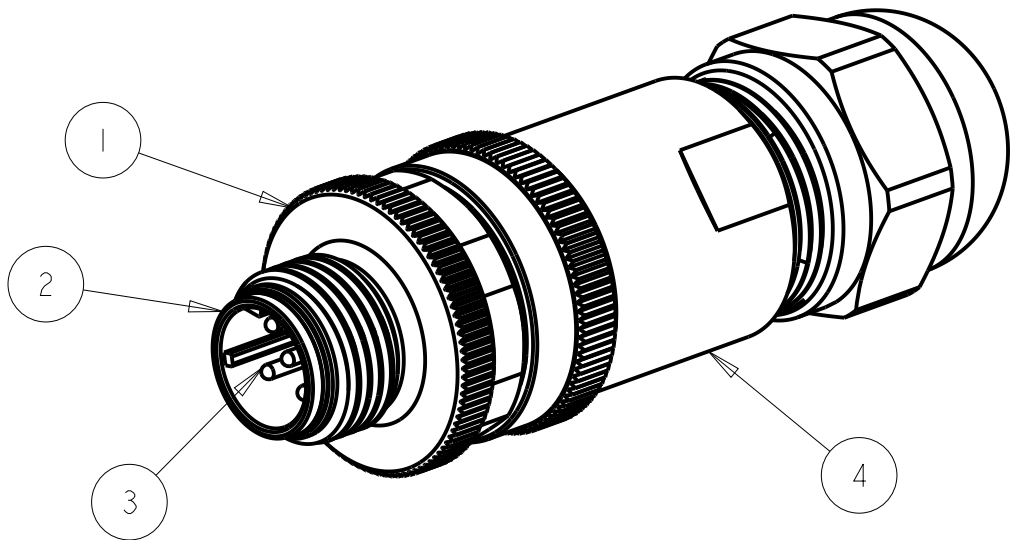

M12D-MS-4CON-PG7-SHU	T4111511041-000	1SET310405R0000
M12D-MS-4CON-PG9-SHU	T4111512041-000	1SET310413R0000
DESCRIPTION	TE PN	ENTRELEC PN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BLAZE PENG 08JUN2021	ENTRELEC Electrical Solutions			
DIMENSIONS:		CHK KEVIN HUANG 08JUN2021				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD CHRIS WANG 08JUN2021	NAME M12 MALE, STRAIGHT SHIELDED CONNECTOR D CODE, SCREW TERMINAL			
mm		PRODUCT SPEC 108-106140	SIZE A2			
MATERIAL		APPLICATION SPEC 114-137144	CAGE CODE -			
-		WEIGHT -	DRAWING NO C-1SET311F13R0000			
-		Customer Drawing	RESTRICTED TO -			
		SCALE 1:1	SHEET OF REV A			