


D

TECHNICAL DATA	T411351X02X-000	T411351X03X-000	T411351X04X-000	T411351X05X-000
RATED VOLTAGE	250V	250V	250V	60V
RATED CURRENT	4A	4A	4A	4A
POLLUTION DEGREE	3	3	3	3
OVERVOLTAGE CATEGORY	II	II	II	II
MATERIAL GROUP	II	II	II	II
INSULATION RESISTANCE	>100MΩ	>100MΩ	>100MΩ	>100MΩ
DEGREE OF PROTECTION	IP67	IP67	IP67	IP67
OPERATION TEMPERATURE	-40~85°C	-40~85°C	-40~85°C	-40~85°C


C

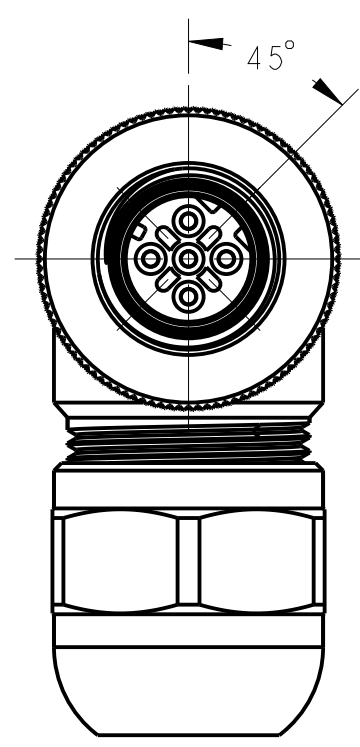

B

PIN ARRANGEMENT D-CODE		
T411351X02X-000	T411351X03X-000	T411351X04X-000
T411351X05X-000		

A

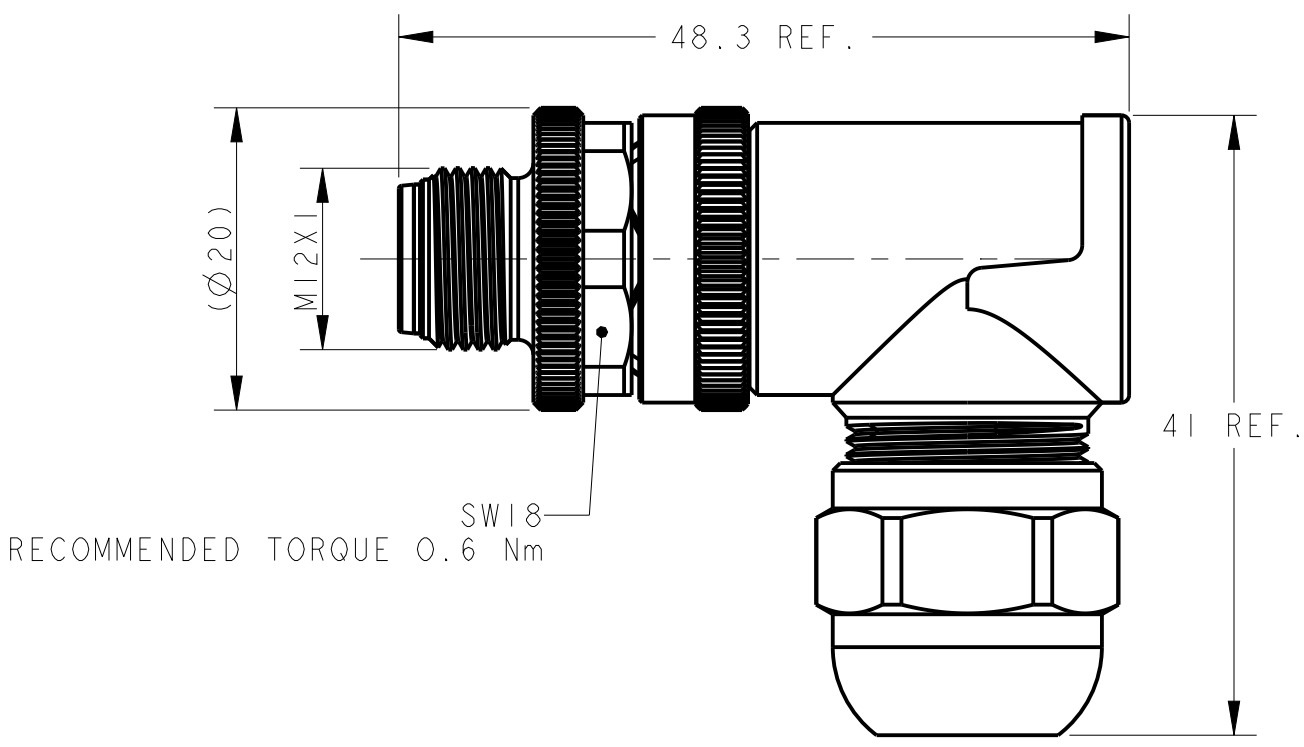

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	08JUN2021	BP	CW

NOTE:


- MATERIAL:
 - ITEM NO.1:NUT -BRASS
 - ITEM NO.2:HOUSING -PA
 - ITEM NO.3:CONTACT -BRASS
 - ITEM NO.4: HOUSING BODY: -PBT+15%GF
- CONTACT FINISH:
 - GOLD OVER NICKEL OR SILVER OVER NICKEL
- CABLE WIRES:
 - 18AWG/0.75mm² Max. FOR 2-5 PINS
 - 20AWG/0.50mm² Max. FOR 8 PINS
- ALLDIMENSIONS ARE FOR NOMINAL REFERENCE ONLY UNLESS OTHERWISE STATED
- PACKAGEING: 1PIECE IN A BAG
- PN INFORMATION

T411351XXXX-000

CONTACT FINISH:
1: GOLD OVER NICKEL
2: SILVER OVER NICKEL

NUMBERS OF PINS:
02: 2 PINS
03: 3PINS
04: 4 PINS
05: 5PINS
08: 8 PINS

CABLE OUTLET:
1: PG7(CABLE FEED: 4-6mm)
2: PG9(CABLE FEED: 6-8mm)

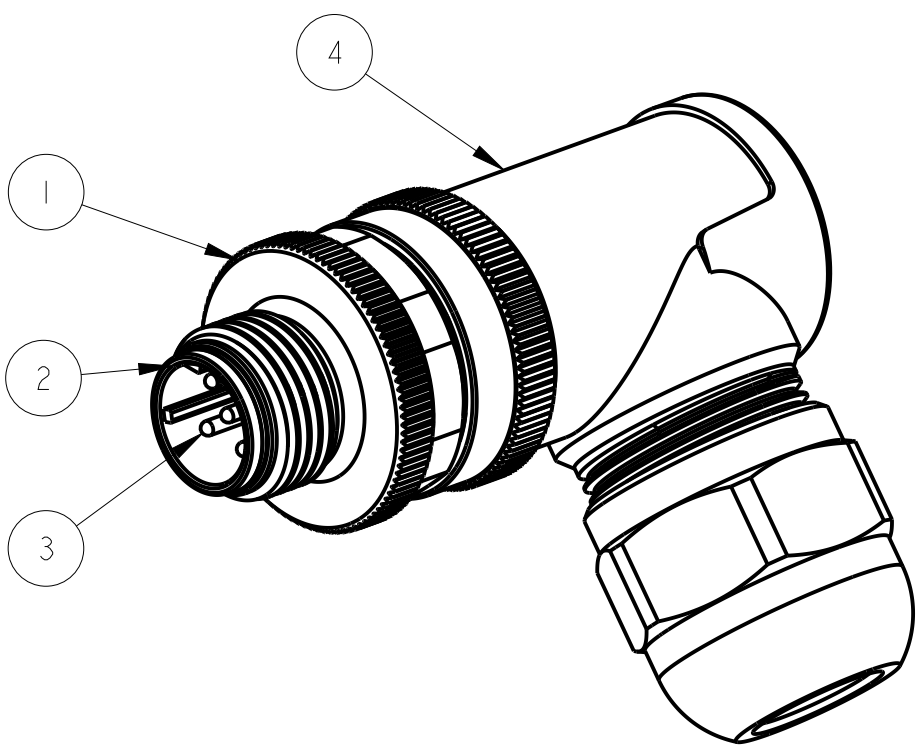

MI2D-MR-4CON-PG7-SHU	T4113511041-000	1SET310613R0000
MI2D-MR-4CON-PG9-SHU	T4113512041-000	1SET310621R0000
DESCRIPTION	TE PN	ENTRELEC PN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08JUN2021 BLAZE PENG	ENTRELEC Electrical Solutions			
		CHK 08JUN2021 KEVIN HUANG				
		APVD 08JUN2021 CHRIS WANG	NAME			
DIMENSIONS:		PRODUCT SPEC	MI2 MALE, RIGHT ANGLE SHIELDED CONNECTOR D CODE, SCREW TERMINAL			
mm		108-106140				
		APPLICATION SPEC	SIZE			
		114-137144	A2			
MATERIAL		WEIGHT	CAGE CODE			
-		-	-			
		Customer Drawing	DRAWING NO			
			RESTRICTED TO			
			-			
			SCALE			
			2:1			
			SHEET			
			OF			
			REV			
			A			

D

C

B

A