

D

C

B


A

D


C

B

A

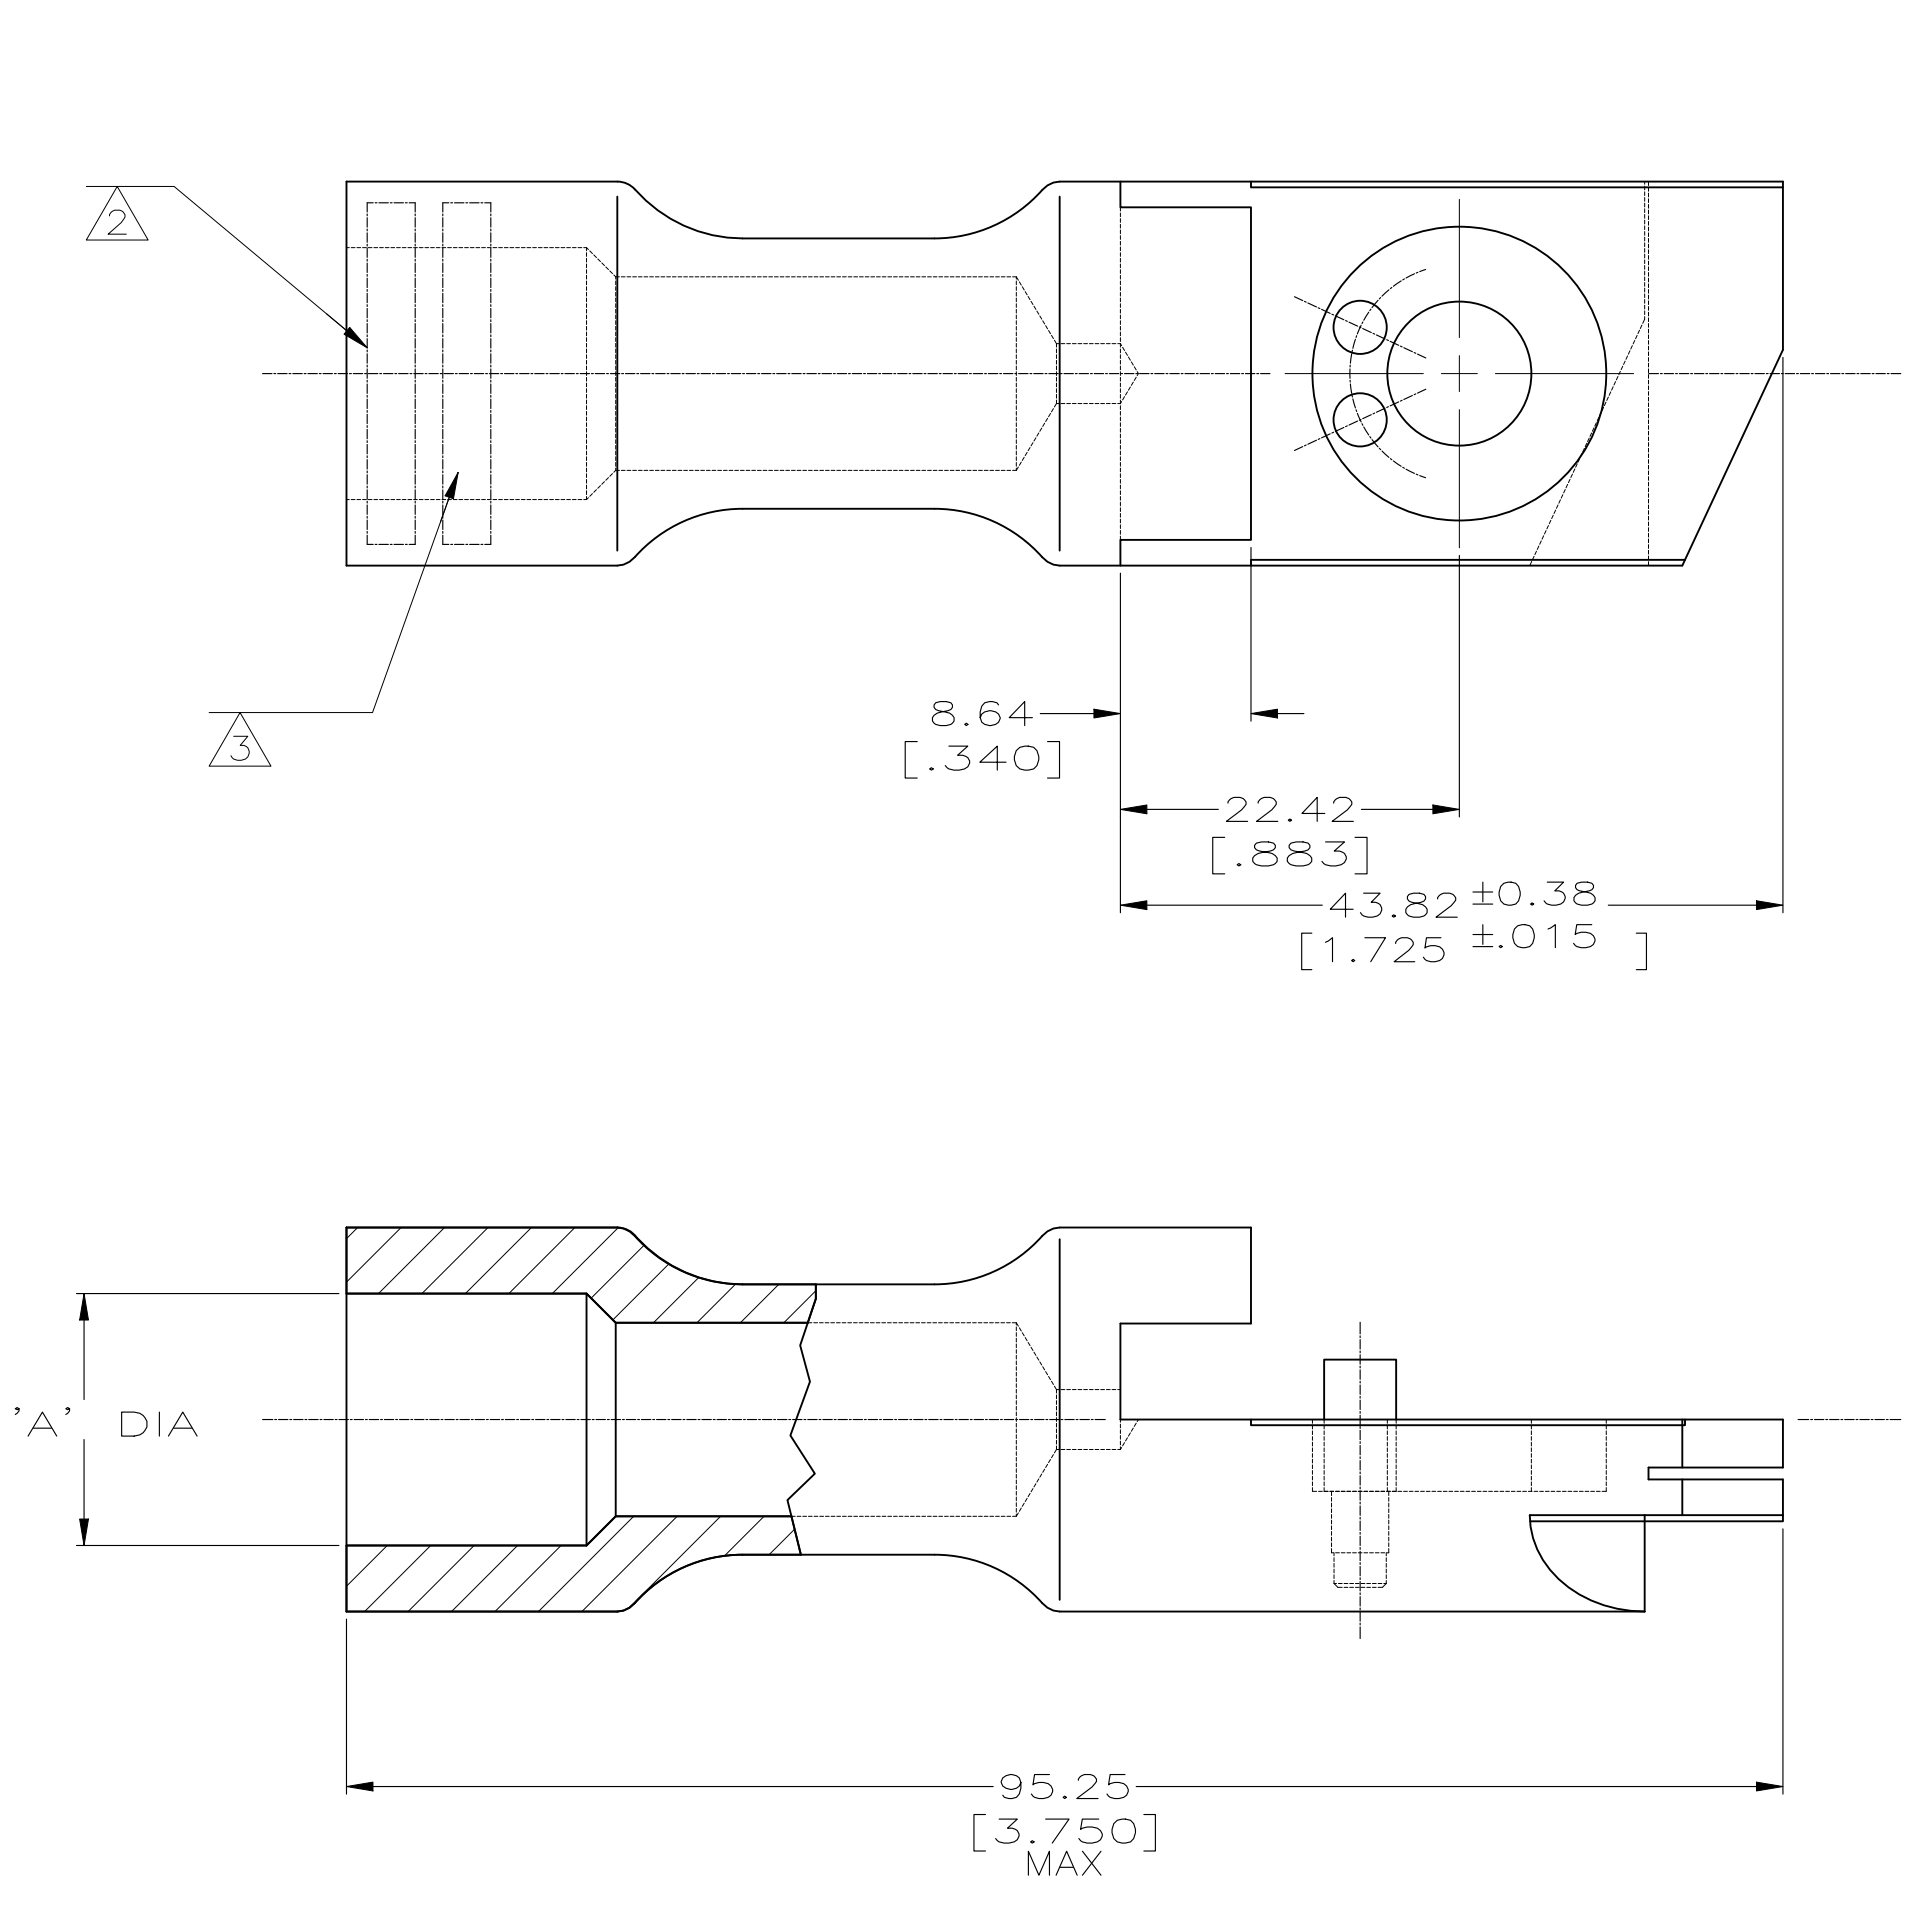

- 1 SPECIAL WIRE SIZE 2/0.
- 2 STAMPING, SEE CHART
- 3 STAMPING, SEE CHART
- 4 FINISH: MIN SILVER PLATE PER QQ-S-365, SEE CHART FOR THK.
- 5 MATERIAL: BODY AND PINS, BRASS PER QQ-B-626
- 6 PRELIMINARY — NOT FOR PRODUCTION

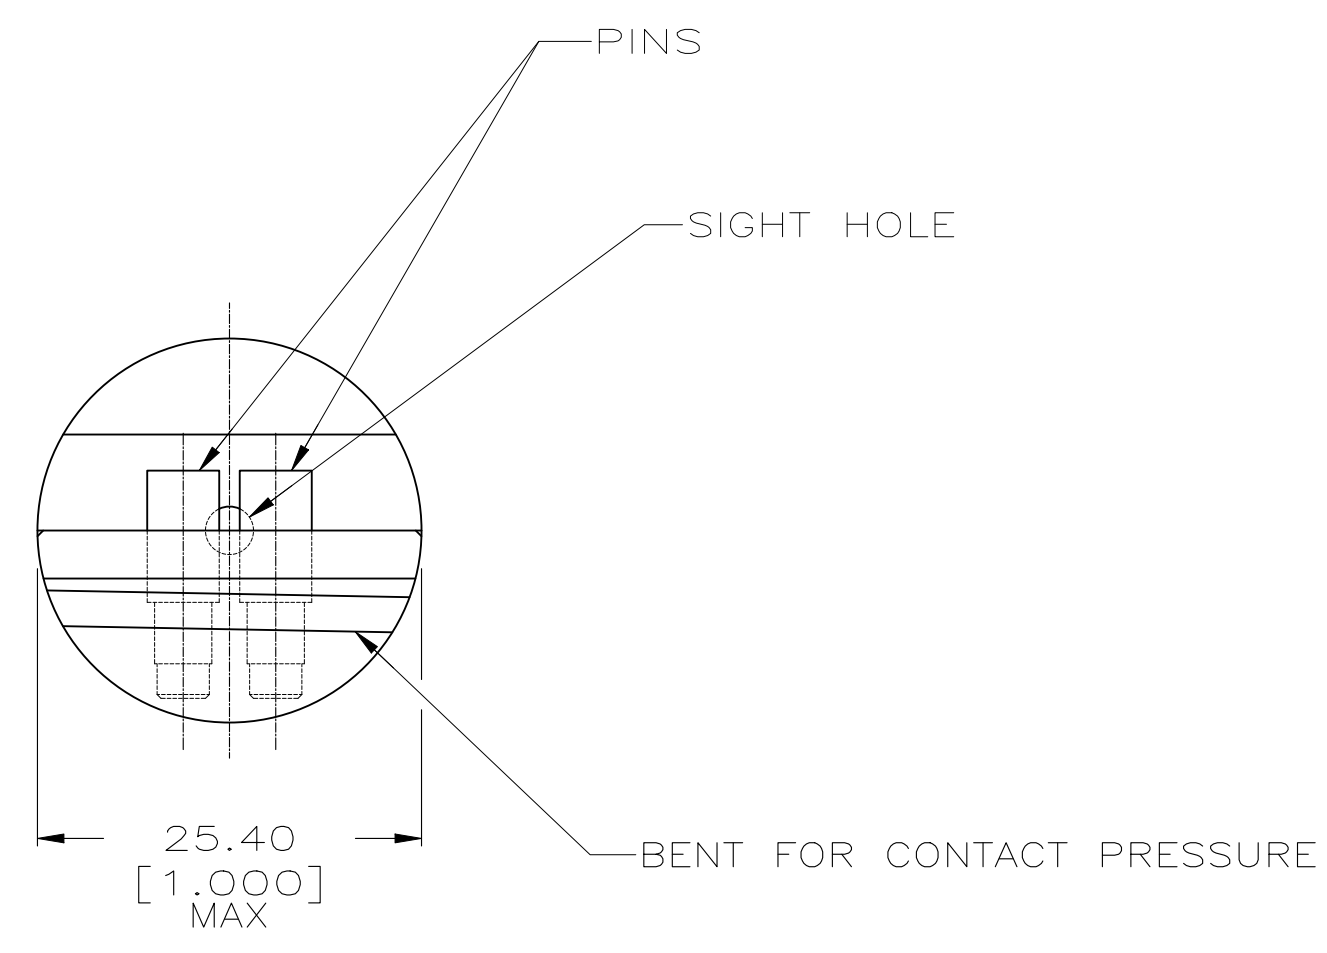

OBSOLETE	W7077D80G15	3/0 A33	18.41 [.725]	0.0076 [.0003]	6 52596-9
	W7077D80G14	2/0S A33	17.48 [.688]	0.0076 [.0003]	6 52596-8 1
SUPERSEDED BY 52596-1	W7077D80G10	3/0 A33	20.62 [.812]	0.0076 [.0003]	52596-6
OBSOLETE	-	AMP 3/0	18.27 [.719]	0.0025 [.0001]	52596-5
	-	AMP 3/0	20.62 [.812]	0.0025 [.0001]	52596-1
	3 STAMPING	2	'A'	FINISH 4	AMP PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

TOLERANCES, UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	0.20[.008]
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-
FINISH	-	4

MATERIAL

- 5

DWN
JR RUTH
22JUL99

CHK
M SPICER
22JUL99

APVD
M SPICER
22JUL99

PRODUCT SPEC
108-13014

APPLICATION SPEC
-

WEIGHT
- lbs

CUSTOMER DRAWING

TE Connectivity

NAME
TERMINAL ASSEMBLY, QUICK-DISCONNECT, AMPPOWER

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=52596

RESTRICTED TO
-

SCALE
2:1

SHEET
1 OF 1

REV
F1