


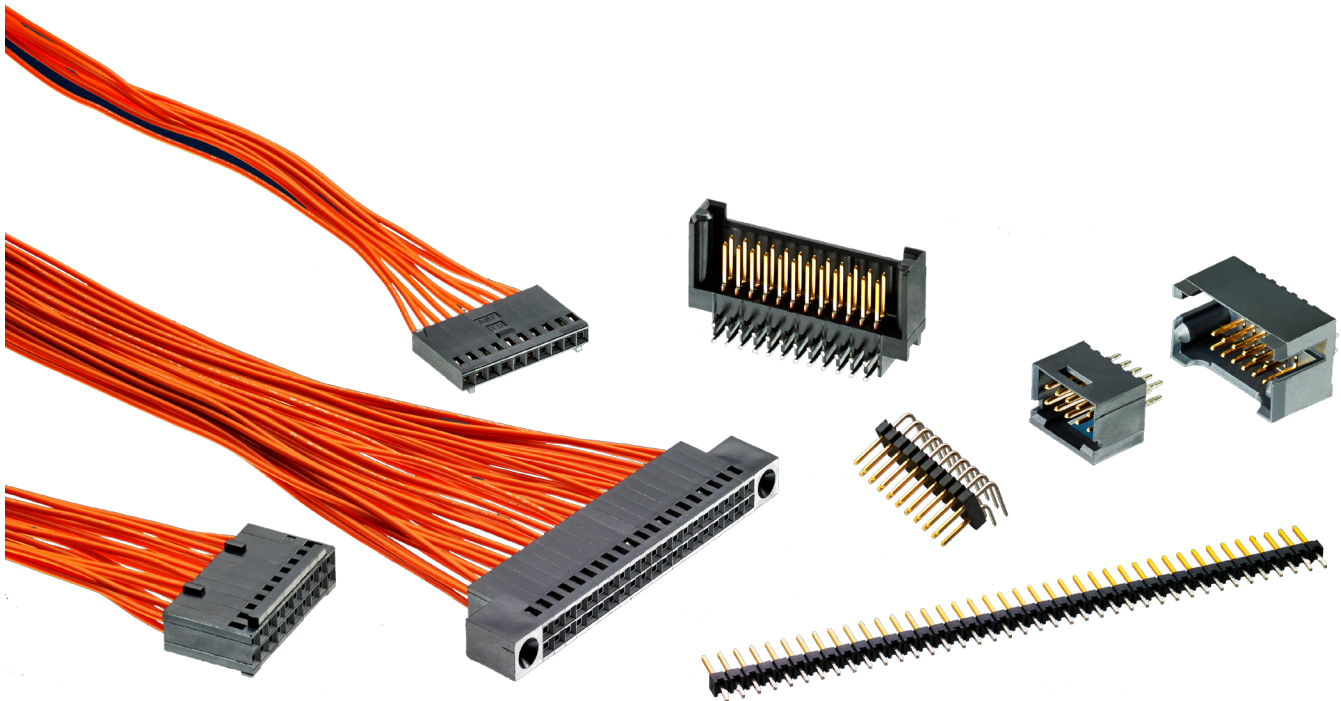

AMPMODU MOD IV, V INTERCONNECTION SYSTEM AND SHROUDED AND BREAKAWAY HEADERS

QUICK REFERENCE GUIDE

INTRODUCTION

The TE Connectivity (TE)'s **AMPMODU Mod IV & V** interconnection system offers a wide variety of rugged and reliable wire-to-board interconnections which mate to breakaway headers and shrouded headers that are utilized to distribute low current signals throughout electronic equipment. Mod IV is ideal for standard pressure applications with minimal vibrations. Mod V is ideal for high pressure applications with high vibrations. Breakaway Headers offer a wide range of flexibility allowing the customer to stock just one part number while allowing that customer to adjust the size of the header needed. Shrouded Headers offer superior pin protection and come in both latching and non latching configurations. Some are polarized to prevent misalignment.

FEATURES AND BENEFITS

- Categorized in two groups: board mount headers, and cable to board receptacles
- Available in single and double row, vertical or right angle, shrouded and breakaway
- Formed from high conductivity copper alloy and selectively plated with gold for higher performance and reliability
- Housings on all board-mounted assemblies are made of high temperature tolerant materials and incorporate stand-offs for free drainage of flux cleaning solutions

PRODUCT APPLICATIONS

- Medical Equipment
- Gaming Equipment
- Automotive Controls
- Servers
- Test/Measurement Devices
- Factory Automation
- Telecommunication Equipment
- Storage Equipment
- Vending


AMPMODU MOD IV, V INTERCONNECTION SYSTEM & SHROUDED & BREAKAWAY HEADERS

MOD IV, V HOUSINGS



Housing Style	Row Type	No. of Positions	Part Number	Features
Polarized	Single Row	3	102241-1	Detent Latching
		20	1-102241-8	Detent Latching
	Double Row	6	2-87977-8	N/A
		34	4-87977-2	N/A
		72	5-87977-4	N/A
		6	87631-1	No Strain Relief
		72	5-87631-8	No Strain Relief
		8	1-102387-4	Center Polarized
		26	102387-6	Center Polarized
		64	1-102387-2	Center Polarized

Please refer to the product catalog for available position sizes

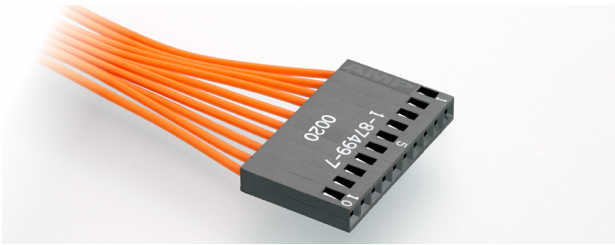

Housing Style	Row Type	No. of Positions	Part Number	Features
Non-Polarized	Single Row	1	7-87499-2	Unstamped PN
		20	3-87499-7	Stamped PN
	Double Row	2	5-87456-3	Unstamped PN
		32	2-87456-7	Unstamped PN


Please refer to the product catalog for available position sizes



Accessories	Type	Part Number	Description
MOD IV, V	Keying Plugs	86286-1	Contact Plug
		87077-2	Housing Plug

AMPMODU MOD IV, V INTERCONNECTION SYSTEM & SHROUDED & BREAKAWAY HEADERS


AMPMODU MOD IV, V

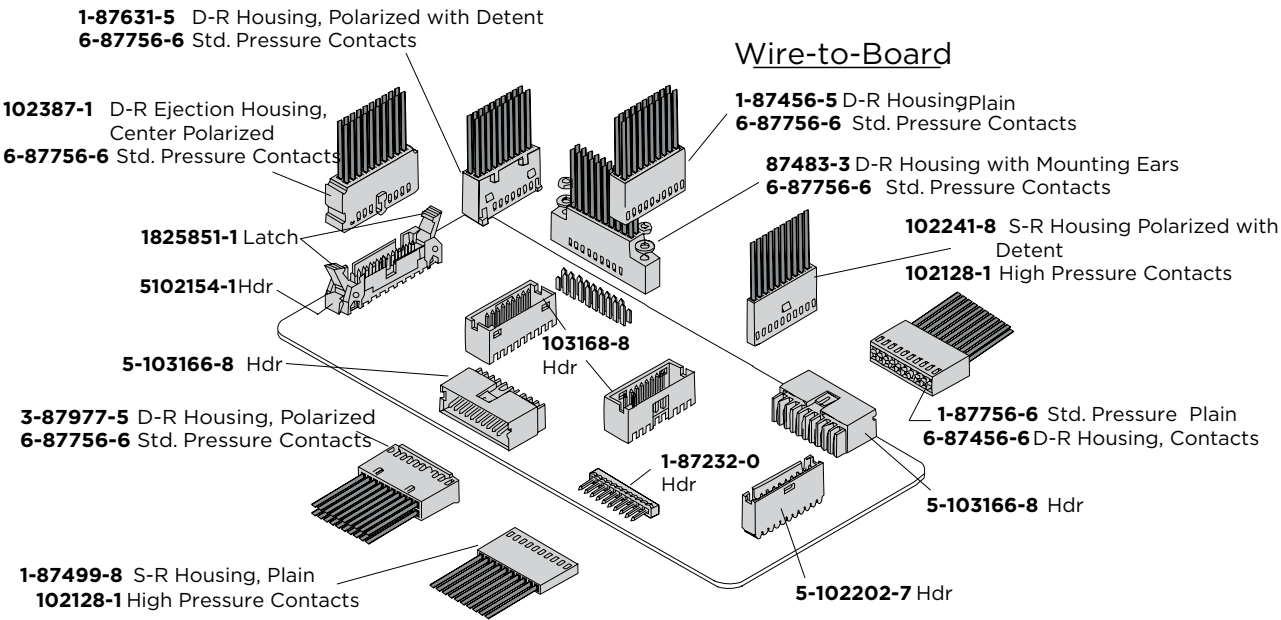

MOD IV, V CONTACTS


Contact Style	Wire Size	Plating	Part Number	Pack Type
MOD IV Receptacle Contacts (Std Pressure)	32-27 AWG	30 Au	5-102316-8	Strip Form
		15 AU	6-102316-3	Loose Piece
		Tin	102316-5	Strip Form
	26-22 AWG	30 Au	6-87756-7	Strip Form
		15 AU	6-87756-6	Loose Piece
		Tin	87756-6	Strip Form
	24-20 AWG	30 Au	6-87523-9	Loose Piece
		15 AU	2-87523-3	Strip Form
		Tin	87523-6	Loose Piece

Please refer to the product catalog for available position sizes


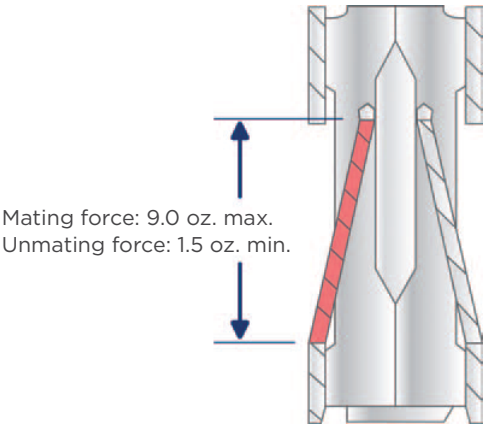


Contact Style	Wire Size	Plating	Part Number	Pack Type
MOD V Receptacle Contacts (High Pressure)	32-27 AWG	30 Au	103455-1	Strip Form
		30 Au	103455-2	Loose Piece
	26-22 AWG	30 Au	87809-1	Strip Form
		Tin	102128-2	Loose Piece
	24-20 AWG	30 Au	1-87309-4	Loose Piece
		Tin	87309-8	Strip Form

Please refer to the product catalog for available position sizes


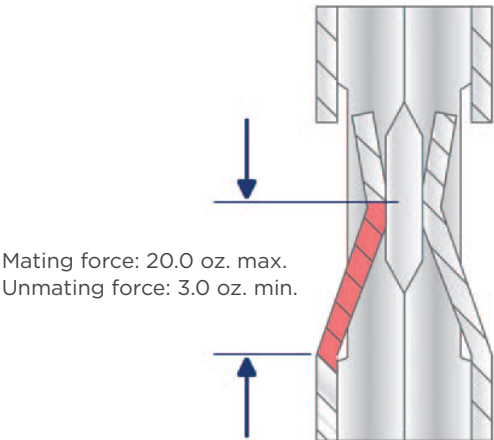


SHROUDED HEADERS



Housing Style	Row Type	No. of Positions	Part Number	Features
Single Row	Vertical	3	5-103414-1	Tube
		13	6-103414-1	Tube
	Right Angle	3	5-103361-1	Tube

Please refer to the product catalog for available position sizes



Housing Style	Row Type	No. of Positions	Part Number	Features
Double Row	Vertical	6	5-103168-1	Detent Windows
		30	6-103168-3	Detent Windows
		6	5-104317-1	Plastic Holdowns
		10	87474-1	Mounting Ears
		10	87608-1	Mounting Ears (Bulkhead)
	Right Angle	6	5-103166-1	Detent Windows
		30	6-103166-3	Detent Windows
		6	5-103164-1	3 Sided Shroud
		10	5-104319-7	Plastic Holdowns

Please refer to the product catalog for available position sizes

AMPMODU MOD IV, V INTERCONNECTION SYSTEM & SHROUDED & BREAKAWAY HEADERS

BREAKAWAY HEADERS


Header Style	Row Type	No. of Positions	Part Number	Pin Type
Vertical Mount	Single Row	1	5-146285-1	Solder Pin
		40	9-146285-0	Solder Pin
	Double Row	2	5-146261-1	Solder Pin
		80	9-146261-0	Solder Pin

Please refer to the product catalog for available position sizes




Header Style	Row Type	No. of Positions	Part Number	Pin Type
Right Angle	Single Row	40	9-146304-0	Solder Pin
	Double Row	80	9-146308-0	Solder Pin

Please refer to the product catalog for available position sizes




Header Style	Row Type	No. of Positions	Part Number	Packaging
Surface Mount	Single Row	3	5-147118-1	Tape/Reel Packaging
		9	5-146128-7	Tube
		15	6-146128-3	Tube
	Double Row	4	5-146130-1	Tube
		10	5-147279-2	Tape/Reel Packaging
		30	6-146130-4	Tube

Please refer to the product catalog for available position sizes



REELED BREAKAWAY HEADERS

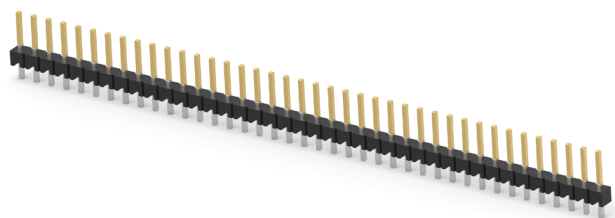

Header Style	Row Type	Plating	Part Number	Packaging
Reeled	Single Row	Tin	5-146852-1	Reel
		15 Au	5-146860-1	Reel
		30 Au	5-146870-1	Reel
	Double Row	Tin	5-146853-1	Reel
		15 Au	5-146861-1	Reel
		30 Au	5-146871-1	Reel

Please refer to the product catalog for available position sizes

QUESTIONS THAT WILL HELP YOU BETTER SELECT THE PRODUCT THAT YOU NEED:

1. What is the available space?

- 0.100 Centerline spacing for single row.
- 0.100 inch x 0.100 inch (between rows Centerline spacing for double row.

2. What is the Current rating (amp) requirement?

- 3.0 amp maximum for a single, contact in free air, 222 V (operating voltage) – Board Mounted Connector.

3. What wire size requirements are there?

- 32 AWG to 20 AWG wire can be used

4. What is the number of positions that are required?

- 1 through 36 positions for single row.
 - 2 through 72 positions for double row.
- Other position sizes available, please refer to the product catalog.

5. What configuration/orientation is required?

- Single/Double Row: Vertical/Right Angle: Through hole/Surface mount.*

*Surface mount not available as a right angle configuration

6. What is the operating temperature requirements?

- -65° C to 105° C Range.

7. What are the environmental considerations?

Refer to TE Product Specifications

- 108-25007 (MOD V. High Pressure)
- 108-25020 (MOD IV. Std. Pressure)

Part numbers in this brochure are RoHS Compliant*, unless marked otherwise *as defined www.te.com/leadfree

te.com

©2025 TE Connectivity plc. All Rights Reserved.

TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks owned or licensed by the TE Connectivity plc. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

01/26 ED