
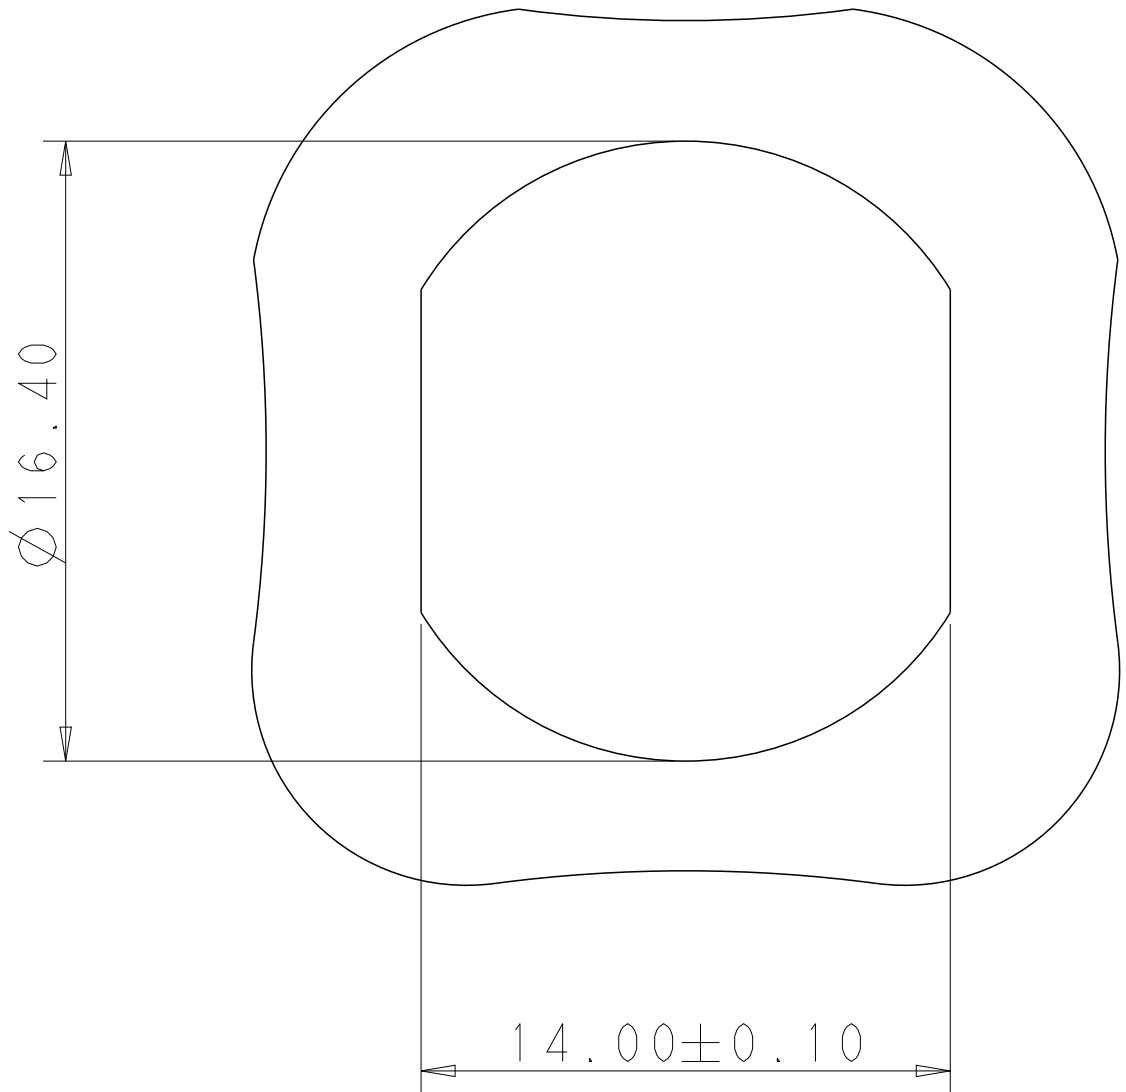


LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
		A1		PER ECR-15-015943	30OCT2015	N.P	X.X	
		A2		PER ECR-20-005213	08APR2020	F.Y	C.W	
		A3		PER ECR-21-001469	04FEB2021	F.Y	C.W	
		B		PER ECR-21-102523	21MAY2021	G.W	C.W	

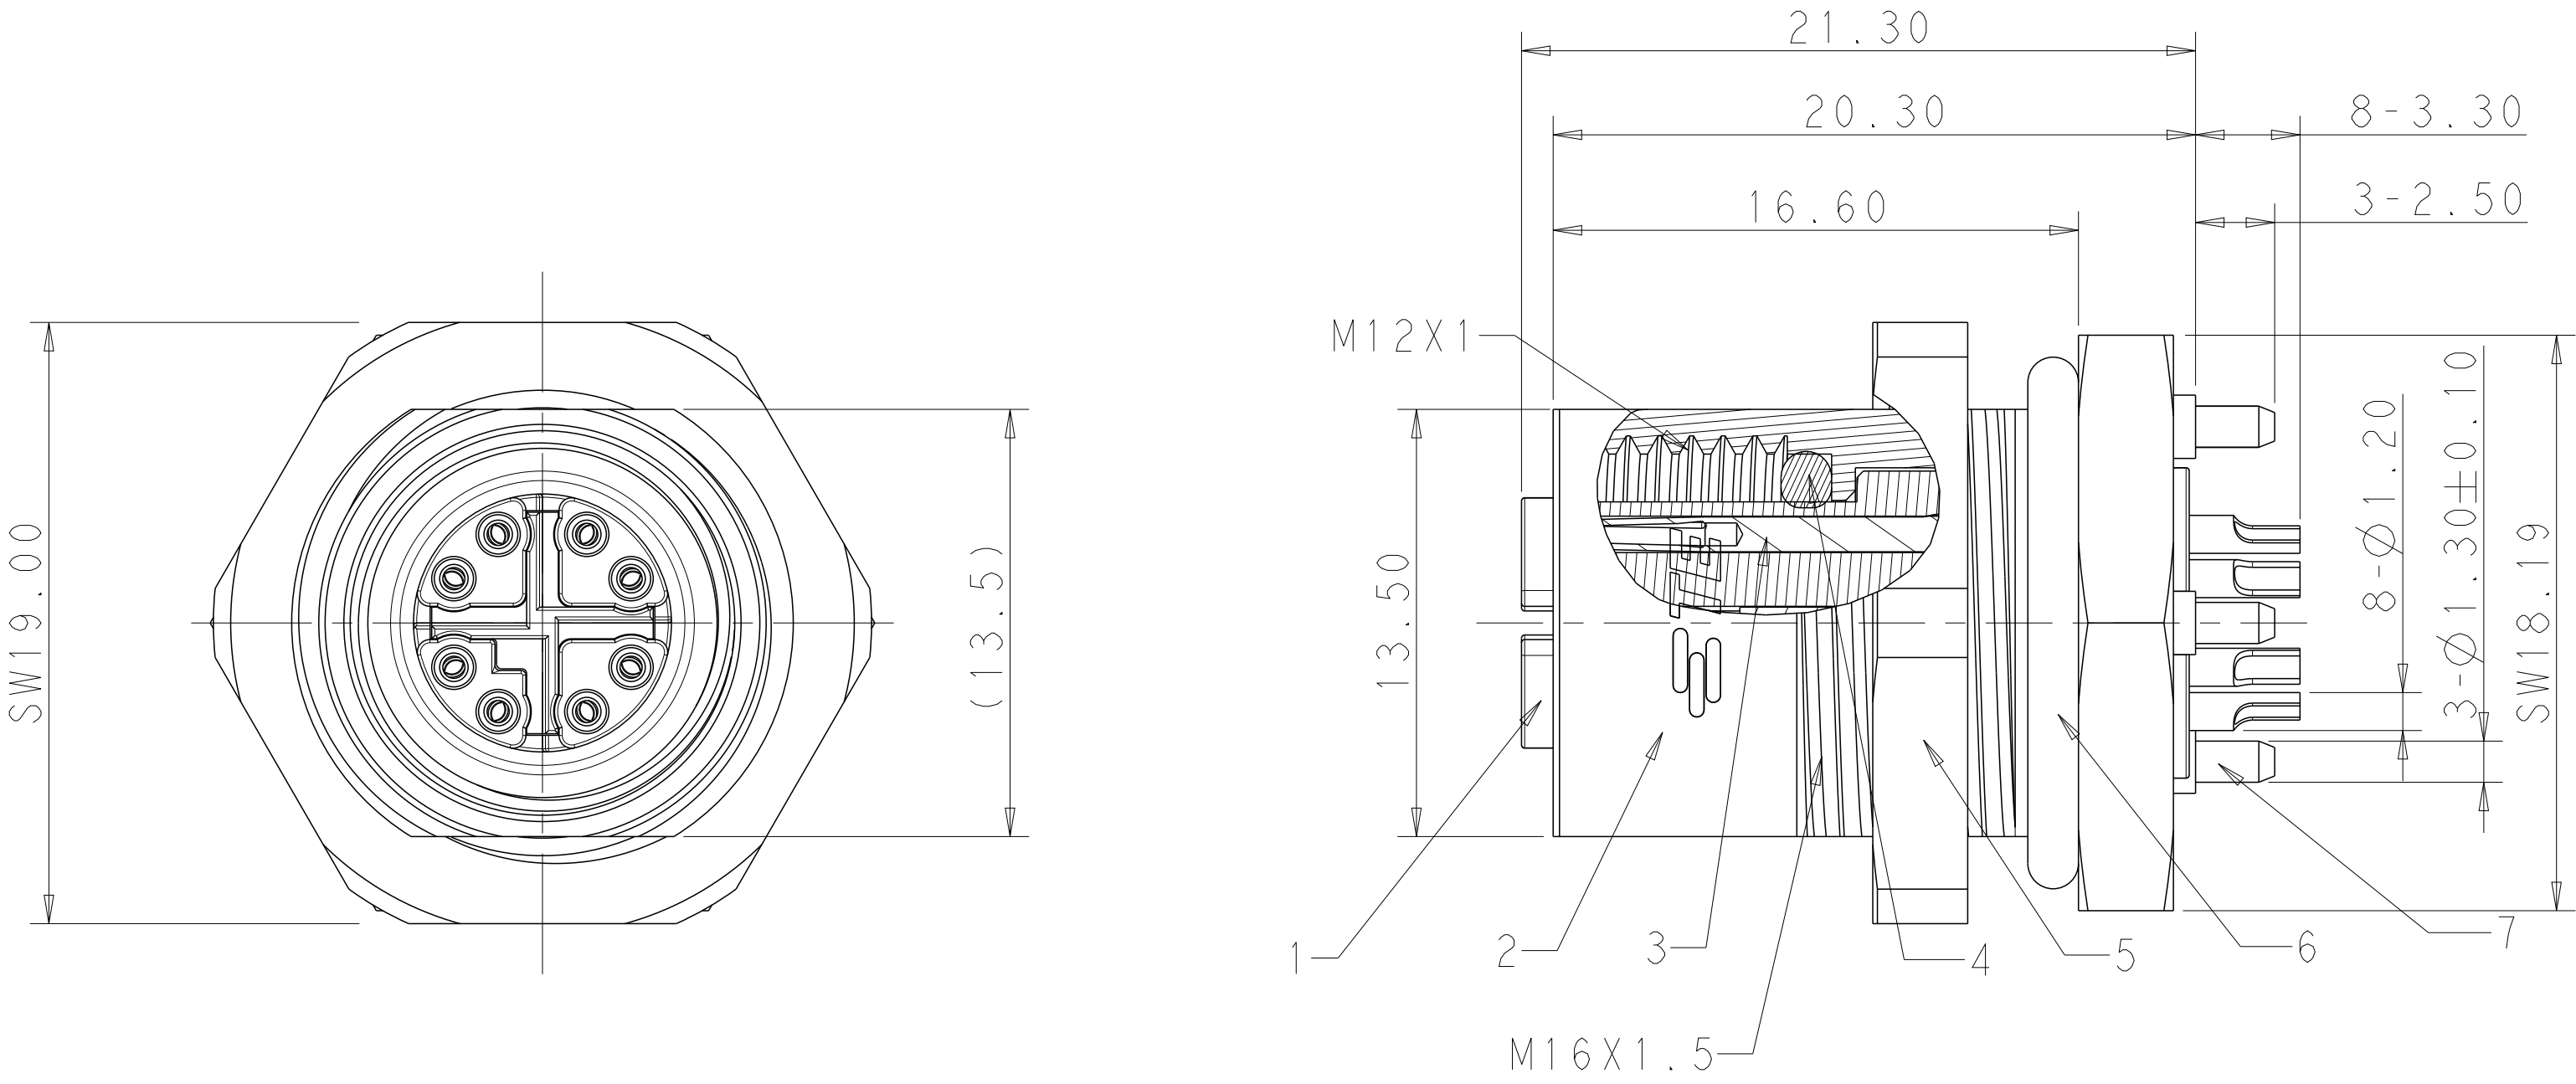


RECOMMENDED PANEL HOLE SIZE
4.5mm MAX PANEL THICKNESS

SPCIFICATION:

1. M12 8P RECEPTACLE REAR MOUNT SHIELDED TYPE.
2. RATED VOLTAGE:48V, RATED CURRENT: 0.5A.
3. CONTACT RESISTANT: 5 mOhm MAX.
4. INSULATION WITHSTAND: 100 MOhm MIN.
5. PROTECTION: IP67.
6. TEMPERATURE RANGE: -25°~+85°.
7. TRANSMISSION CHARACTERISTICS: CAT6a.
8. PACKAGE:40PCS/TRAY,10TRAYS/BOX(TOTAL 400PCS).
9. SUITABLE WIRE RATING: 22~28AWG

规格:

1. M12 8针 板后屏蔽型母座.
2. 额定电压:48V, 额定电流:0.5A
3. 接触阻抗:5 mOhm MAX. ,
4. 绝缘阻抗:100MOhm MIN. .
5. 保护等级:IP67
6. 温度范围:-25°~+85°.
7. 传输特性:CAT6a
8. 包装规范:40PCS/TRAY,10TRAYS/箱(共400pcs产品)
9. 适用导线规格:22~28AWG

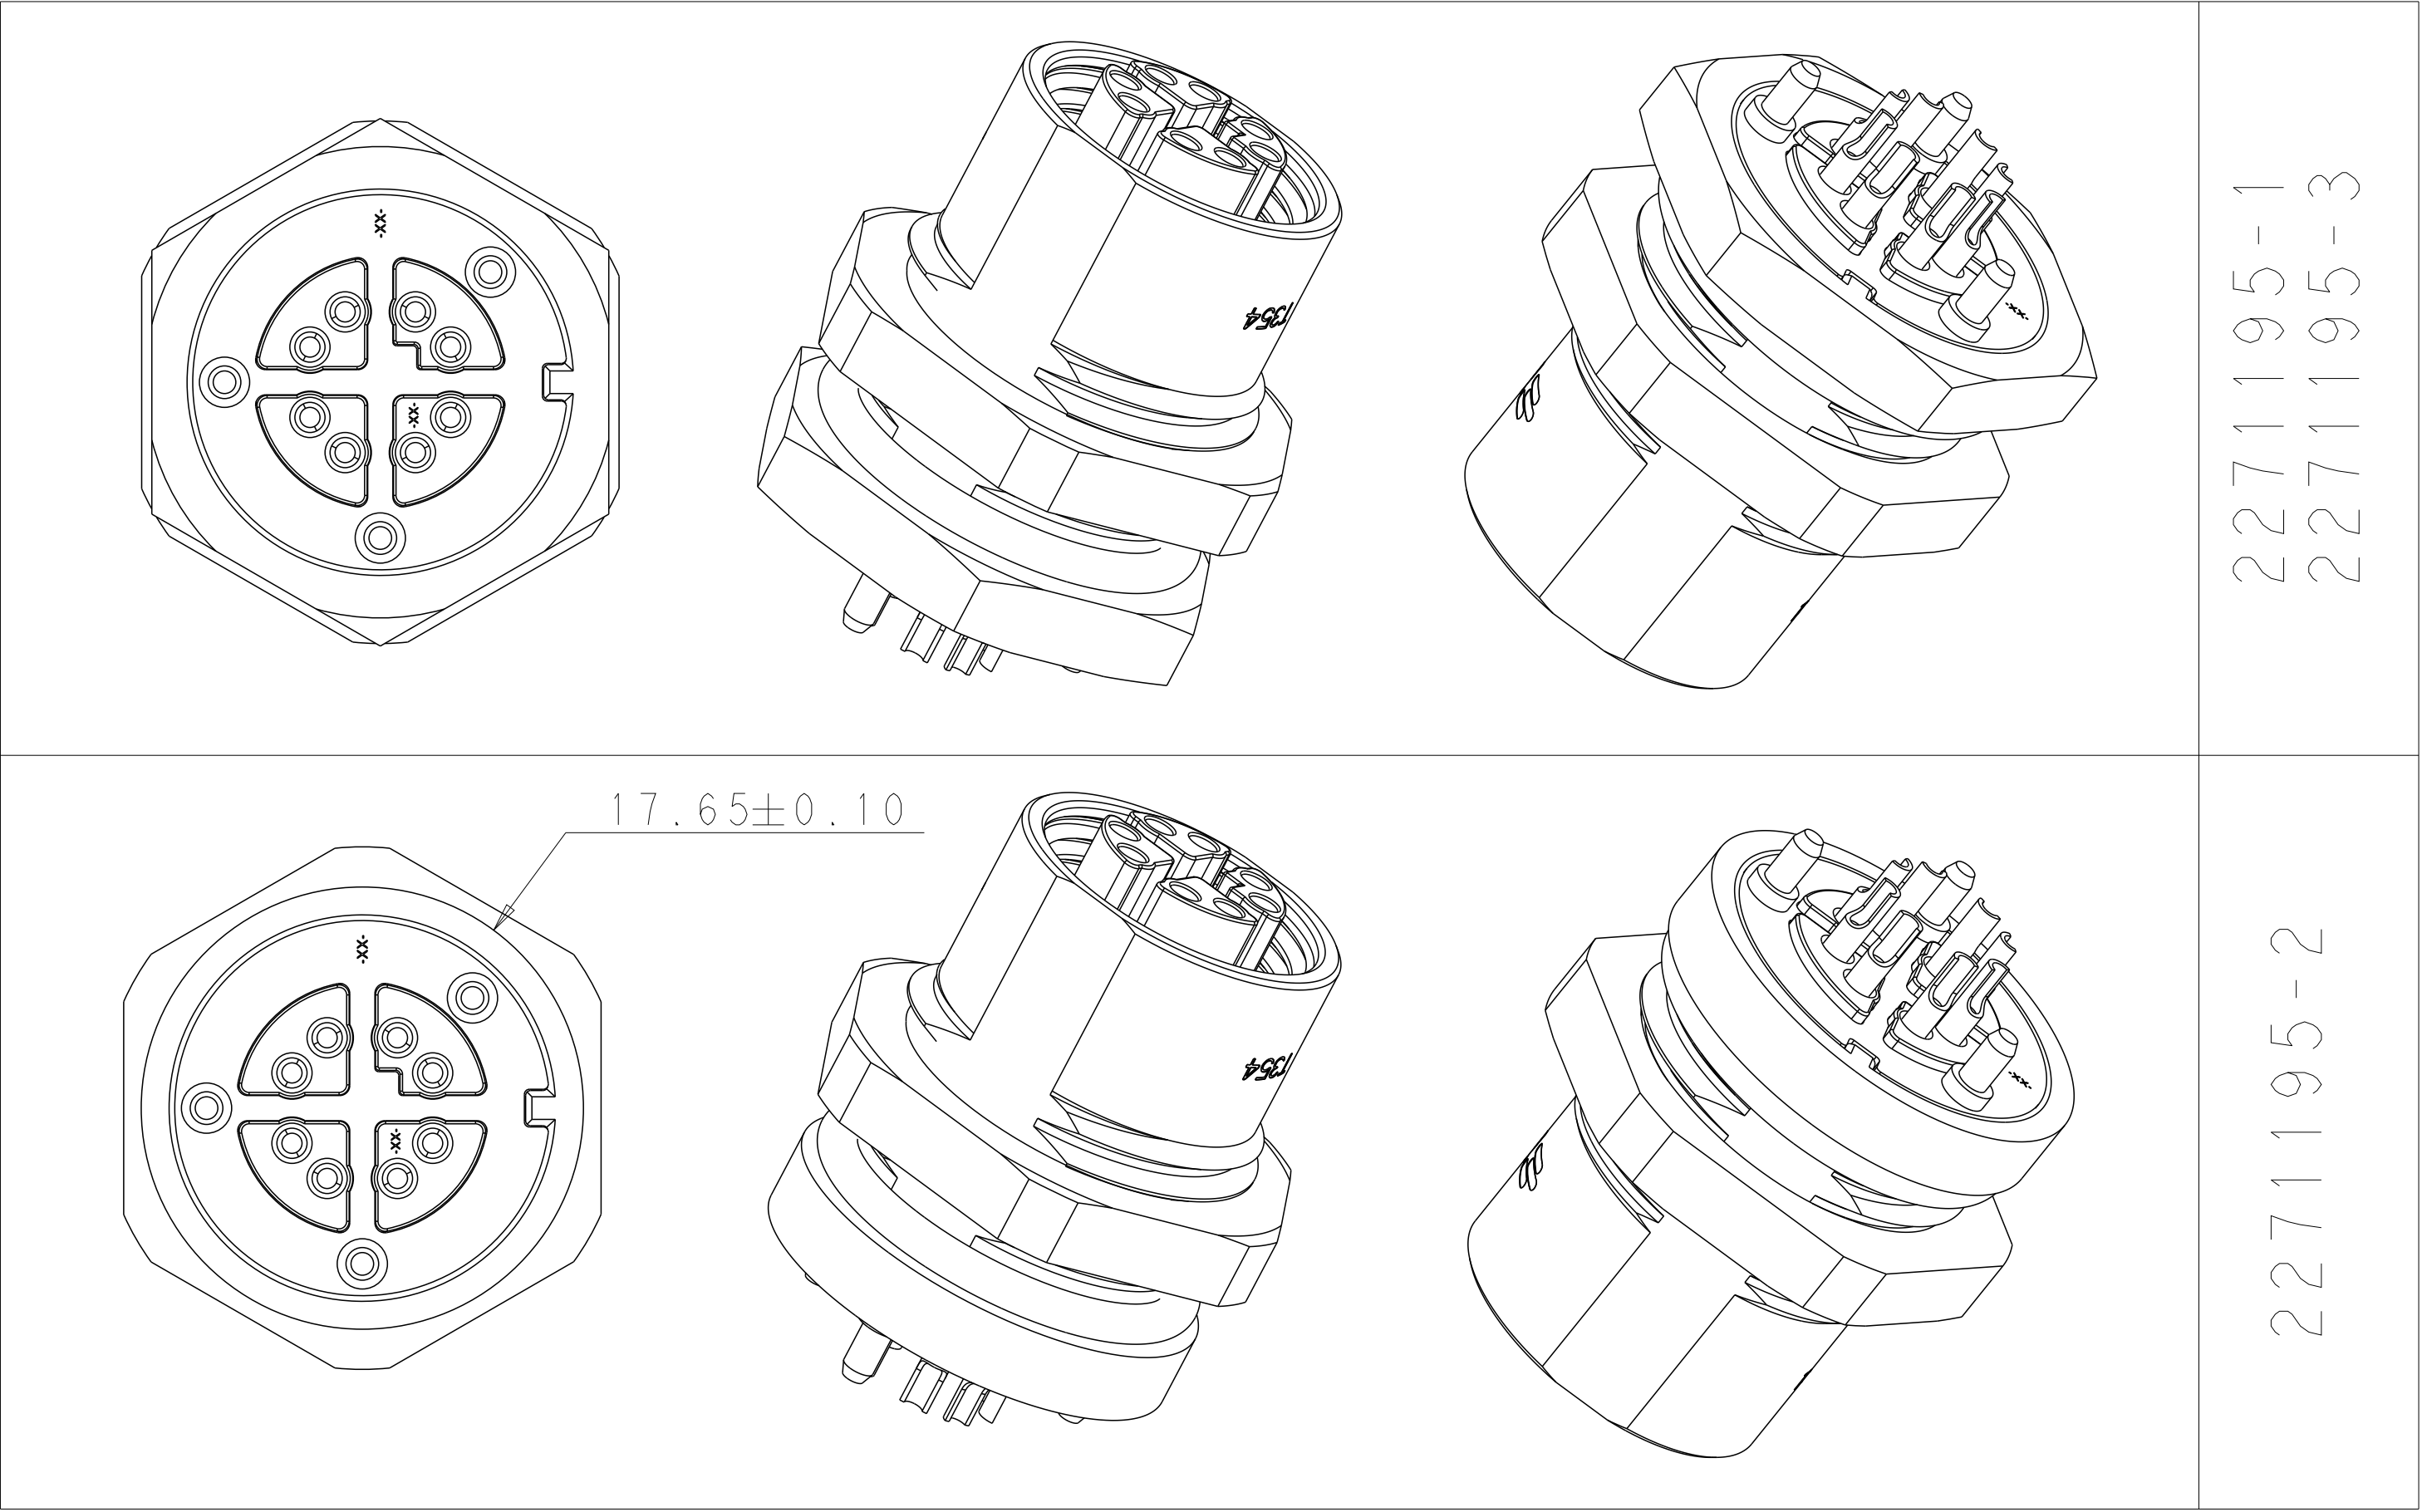

ITEM	DESCRIPTION	MATERIAL	FINISH/COLOR	2271195-1	2271195-2	2271195-3
1	INSERT HOUSING	PA	BLACK	1	1	1
2	HEXAGONAL SHELL	ZINC ALUMINUM ALLOY	NICKEL OVER COPPER	1	1	1
3	SOCKET CONTACT	COPPER ALLOY	GOLD OVER NICKEL	8	8	8
4	SEALER RING	FKM	BLACK	-	-	1
	SEALER RING	LSR	BLACK	1	1	-
5	HEXAGONAL NUT	COPPER ALLOY	NICKEL OVERALL	1	1	1
6	SEALER RING	FKM	BLACK	-	-	1
	SEALER RING	LSR	BLACK	1	1	-
7	CROSS SHIELDED	ZINC ALUMINUM ALLOY	NICKEL OVER COPPER TIN OVER NICKEL	1	1	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN FENCER YU 24JUN2015	 TE Connectivity		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK KOBBOY ZHAO 24JUN2015			
DIMENSIONS: mm		APVD XIANG YU 24JUN2015	NAME REAR PANEL MOUNT SOLDER CONNECTOR M12 X-CODE		
		PRODUCT SPEC 108-137008			
MATERIAL -		APPLICATION SPEC 114-137008	SIZE A100779C=2271195		
		WEIGHT -			
Customer Drawing			SCALE 5:1	SHEET 1 OF 1	
			REV B1		