
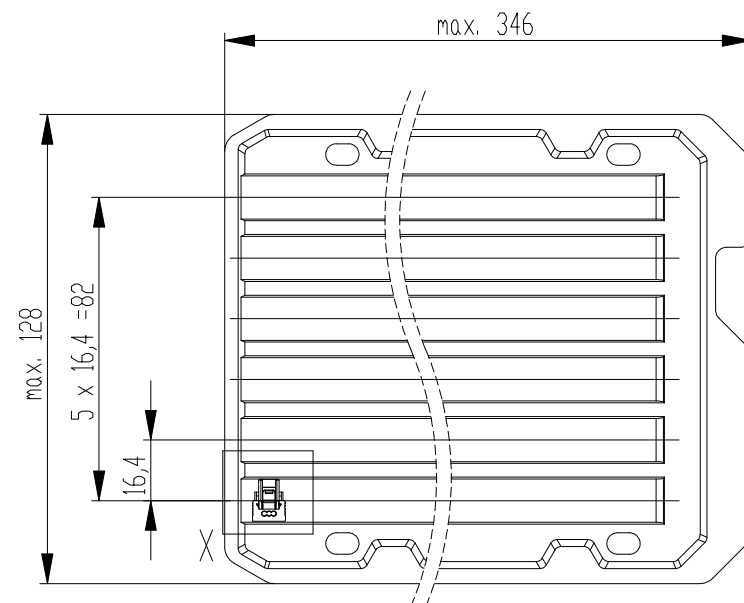
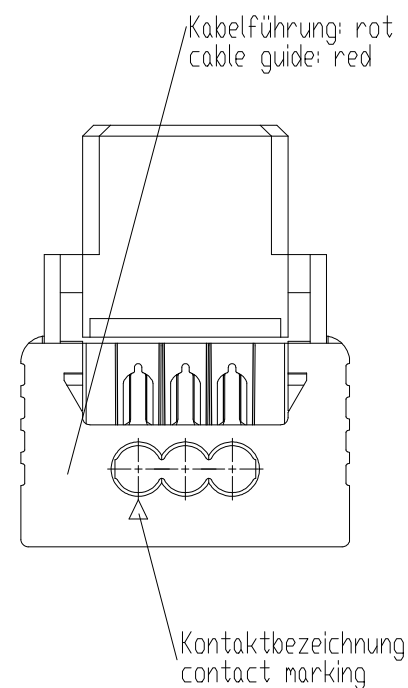


(Kabelführung verpresst)
(cable guide pressed on)



SC special characteristics

*only with tool unlockable, for single conductors, for the requirement of the LV214 PG 9 (Koshiri-security)

Dimension no.				Tolerances Dim. for Information ISO 8015		 All Dimensions in mm		Scale 5:1		
Customer drawing: THIS DRAWING IS A CONTROLLED DOCUMENT.				Subject to modification without prior notice. Drawing will not be updated.				ERNI-MiniBridge Female Cable Outlet 90 IDC 03p KS D1,27 AWG 22 PLock*		
				b			02.02.2021		©- 474158-E	
Index			Date		Class		SRCP	A3		