

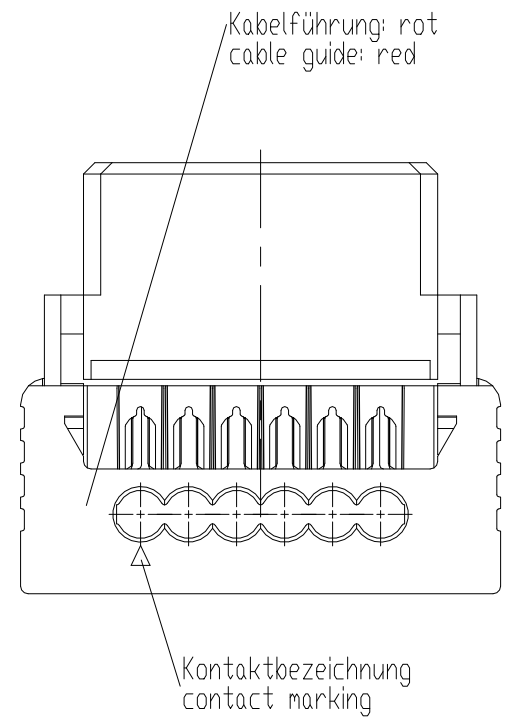
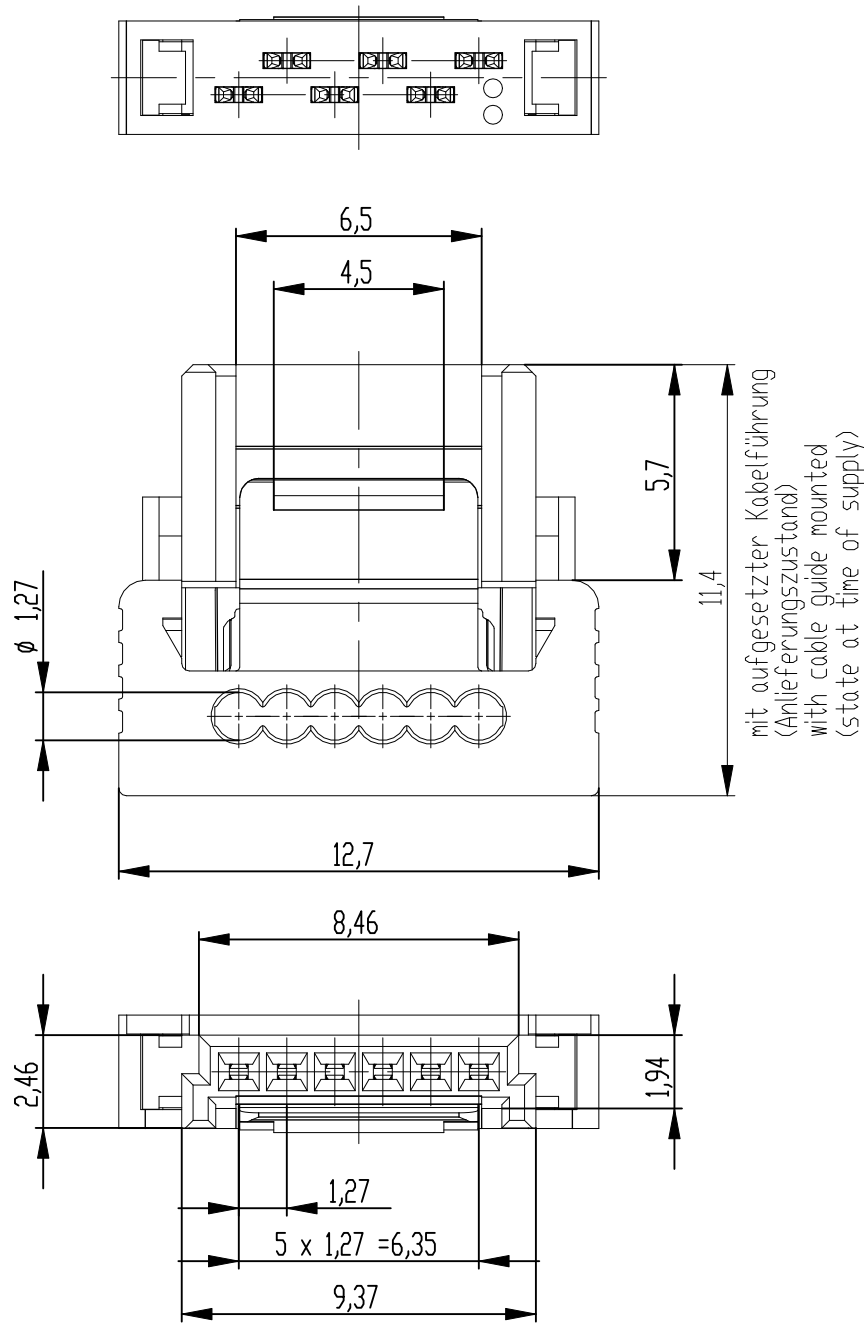
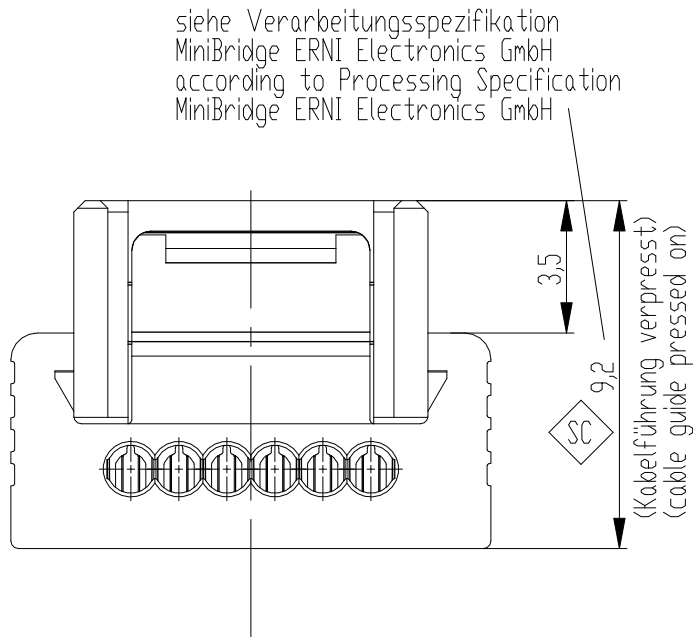


Die deutsche Version dieser Zeichnung dient nur zur Erleichterung der
Anwendung der Handlungen von den englischen Original gilt als
englische Original.
The german version of this drawing has been offered for convenience only
and may deviate from the english original.
In case of any deviation the English version shall prevail.

Weitergabe oder Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind
verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz.
Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Geschmacksausbreitung vorbehalten.
The reproduction, distribution and utilization of this document as well as the communication
of its contents to others without express authorization is prohibited. Offenders will be held liable for the
payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

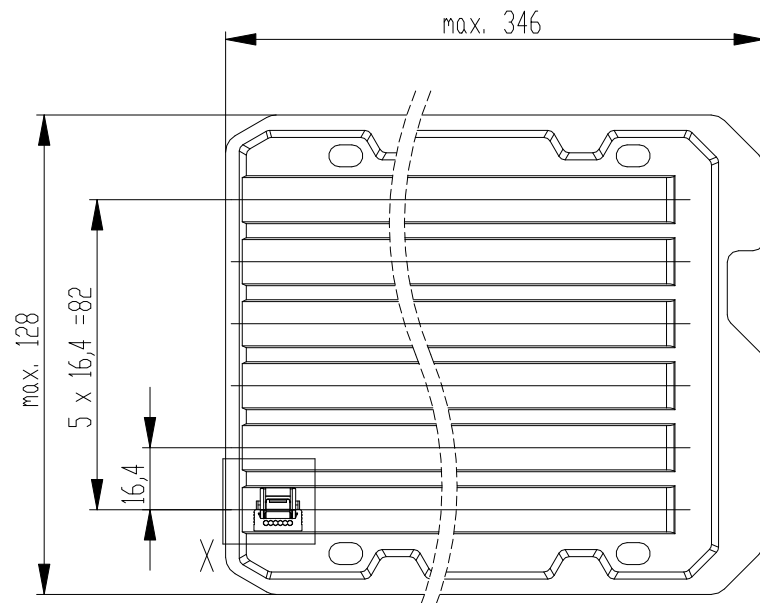

Detail X
scale 2:1

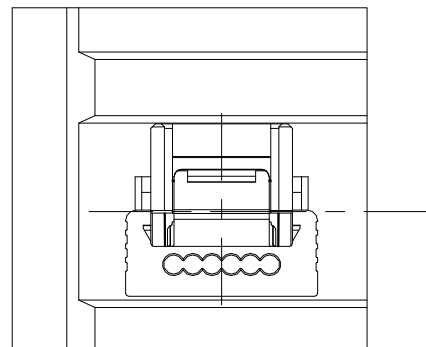


Verpackt in Tray - tray packaging
Verpackungseinheit 144 Stück - packaging unit 144 pcs

SC special characteristics

*nur mit Hilfsmittel lösbar, für Einzeladern, für die Anforderung nach
PG 9 der LV214 (Koshiri-Sicherheit)

*only with tool unlockable, for single conductors, for the requirement of
the LV214 PG 9 (Koshiri-security)

Dimension no.				Tolerances Dim. for Information ISO 8015		 All Dimensions in mm		Scale 5:1		Material	
<u>Customer drawing:</u> THIS DRAWING IS A CONTROLLED DOCUMENT.				Subject to modification without prior notice. Drawing will not be updated.				ERNI-MiniBridge Female Cable Outlet 90 IDC 06p KS D1,27 AWG 22 PLock*			
				 TE Connectivity				©- 474832-E			
a				02.02.2021				Class SRCP			
Index				Date							