

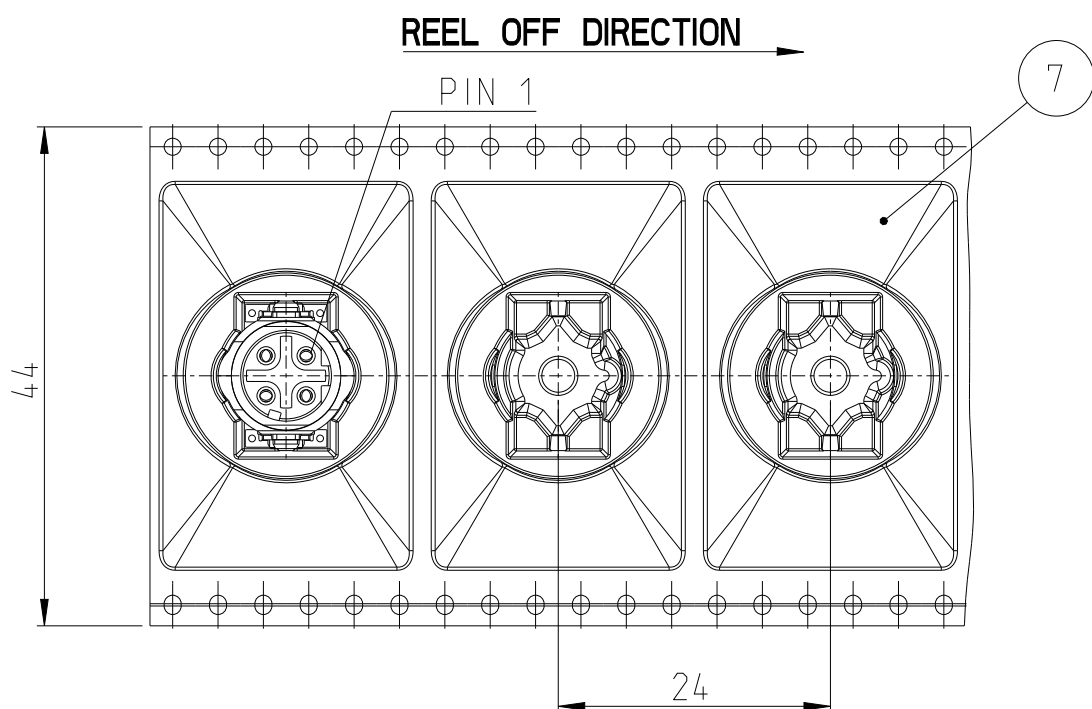
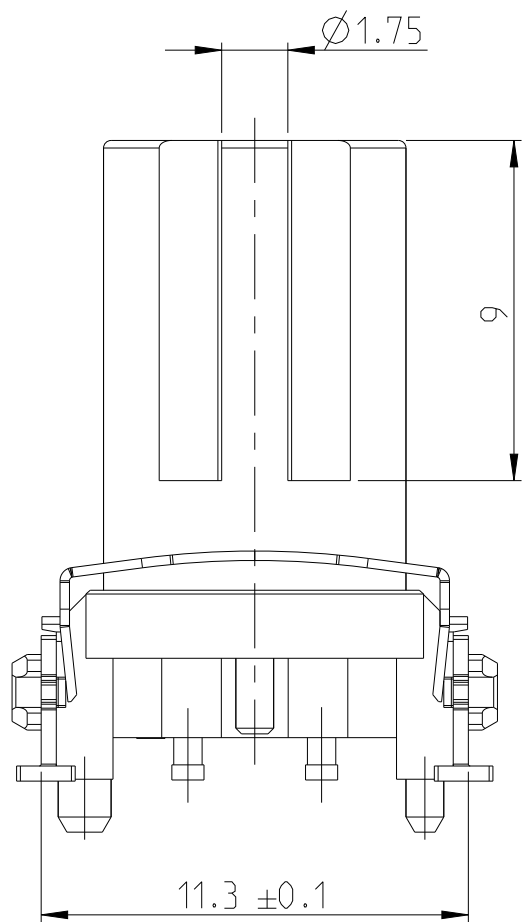
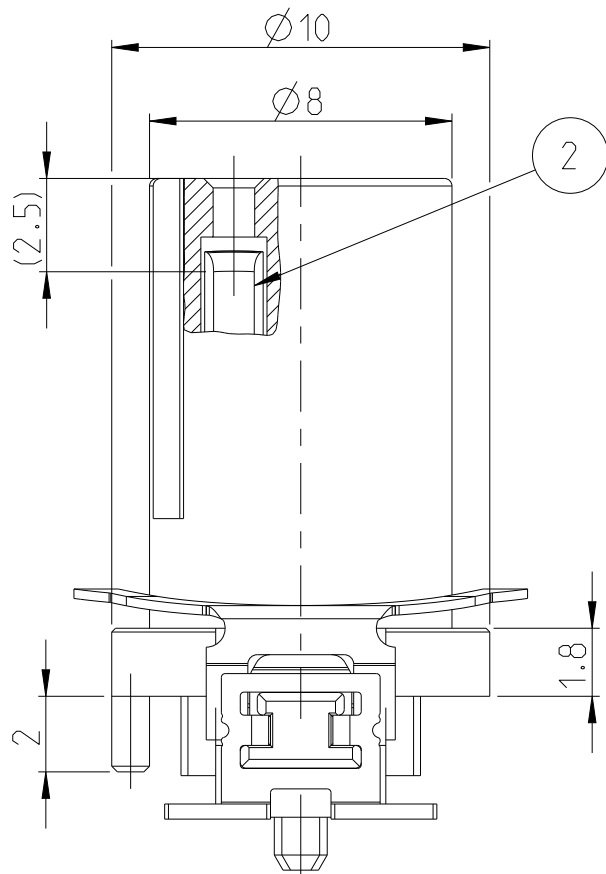


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	NEW DRAWING	29AUG2023	ASB	JOB
	B1	DRAWING RE-CREATED IN CREO	28DEC2023	ASB	JOB
	B2	REEL CORE DIA CHANGE	25JUL2024	KA	LET

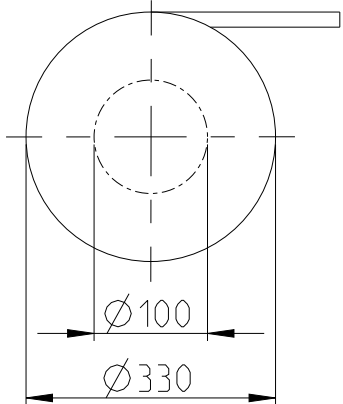

TAPE ON REEL PACKAGING ACCORDING TO DIN IEC 60286-3
PACKAGING UNIT: 100 PCS

[illegible]

A technical line drawing of a 3-phase asynchronous motor. The drawing shows the stator with four circular openings for cooling or ventilation, and the rotor assembly at the bottom with mounting feet and a terminal box.

1. DRAWING SPECIFICATION ACCORDING TO DOCUMENT 5_3_16-DOC-1806-00915
2. COPLANARITY OF ALL CLIPS $\leq 0,1\text{MM}$

1	1	-	TAPE & REEL	7
1	1	-	SHIELD	6
1	-	-	PAD	5
1	1	-	SOLDER CLIP LEFT	4
1	1	-	SOLDER CLIP RIGHT	3
4	4	-	PINS	2
1	1	-	HOUSING	1
484937-E	484936-E	REV	DESCRIPTION	ITEM NO.
-	-	REV OF EACH ASSY NO. (WHEN BLANK, USE DWG. REV)		
QTY		PARTS LIST		

V=TURNED CONTACT (PCB SIDE CAN BE USED WITH POTTED COMPOUND)

① PROOF OF PROCESS CAPABILITY OR 100% TEST IF
PROCESS CAPABILITY IS NOT ACHIEVED

(72) PROOF OF MEAN VALUE, STANDARD DEVIATION AND MACHINE CAPABILITY

⑦ PROOF OF VALUES OR PROOF OF ATTRIBUTIVE TEST

INFORMATION ON THE SCOPE OF TESTING AND DETECTION BY ERNI VA 7.3.2.3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B S ADRUSH 11AUG2023		 TE Connectivity			
		CHK M SZEJAG 13AUG2023					
DIMENSIONS:		TOLERANCES, UNLESS OTHERWISE SPECIFIED: ISO 2768-mK ISO 8015		NAME		M12 FEMALE, D CODE, 4P, 17MM SMT V	
mm		APVD J DE BRULIN 13AUG2023		-		-	
		PRODUCT SPEC 108-94887		SIZE		CAGE CODE	
		APPLICATION SPEC 114-94781		DRAWING NO		RESTRICTED TO	
		WEIGHT -		A2 00779		C=484936-E	
MATERIAL		FINISH		SCALE		SHEET	
-- --		- -		5:1		1 of 1	
CUSTOMER DRAWING				REV		B2	