

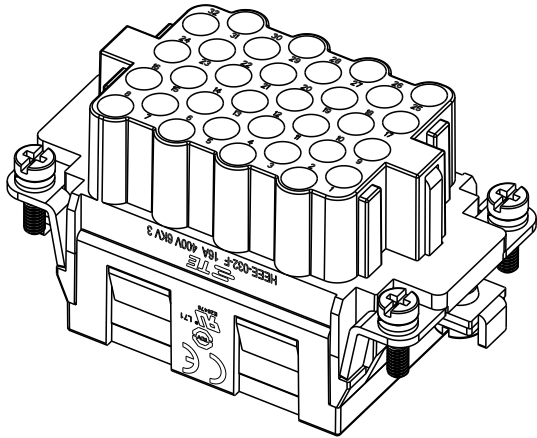
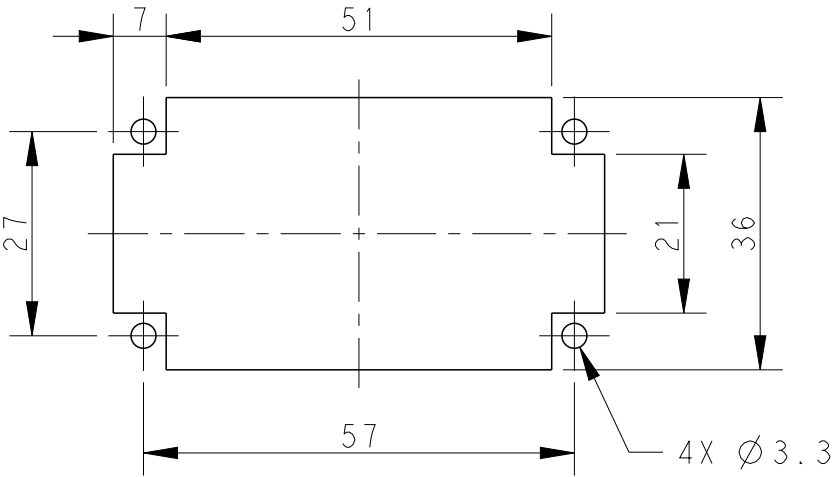
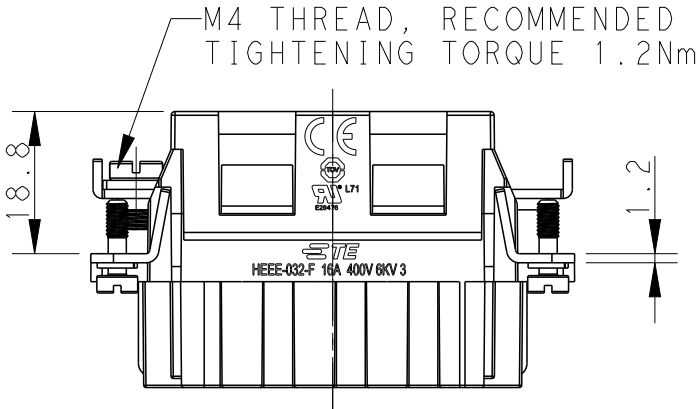



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	ECR-21-111798	02SEP2021	WQR	CW
	C1	ECR-22-152753	21SEP2022	WQR	CW
	C2	ECR-24-202368	12MAR2024	RW	CW
	D	ECR-24-228547	05DEC2024	QH	BR

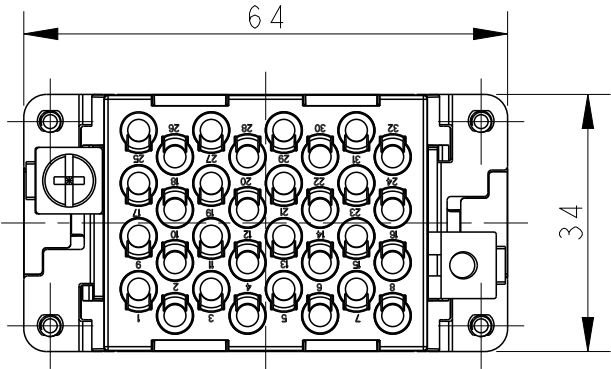

TYPE I,T2050323201-000
类型 I,T2050323201-000

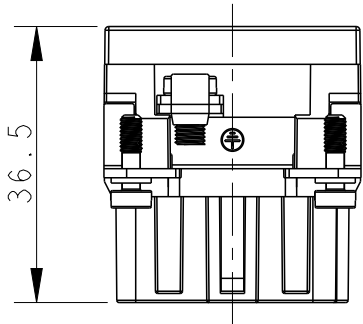


PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS

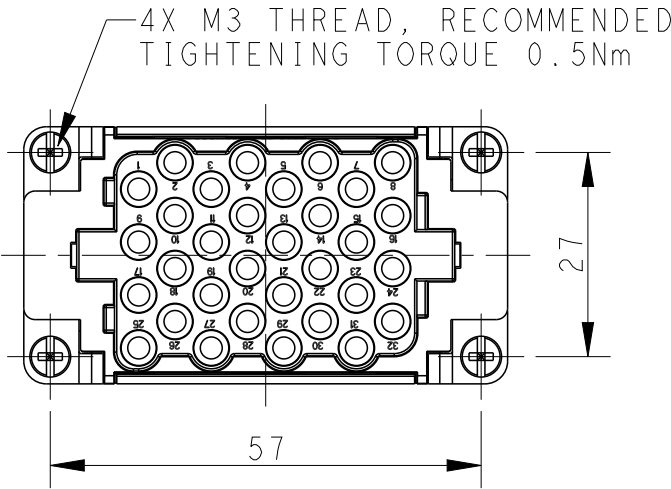

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 400V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
OPERATION TEMPERATURE: $-40^{\circ}C \sim +125^{\circ}C$
WIRE RANGE: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
CONTACT TYPE: CRIMP CONTACT
 - CONTACTS NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20300X20XX000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 400V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
工作温度: $-40^{\circ}C \sim +125^{\circ}C$
接线范围: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20300X20XX000)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	18DEC2014	 TE Connectivity		
		CHK	18DEC2014			
DIMENSIONS: mm		CHRIS WANG	18DEC2014	NAME HEEE-032-F		
		APVD	18DEC2014			
		XU XIANG	18DEC2014	SIZE A300779		
		PRODUCT SPEC	108-137068			
MATERIAL		APPLICATION SPEC	114-137068	DRAWING NO T2050323201000		
		WEIGHT	-			
Customer Drawing		SCALE		1:1	SHEET	
					1 OF 3	REV D

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20



© COPYRIGHT 20

BY -


ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

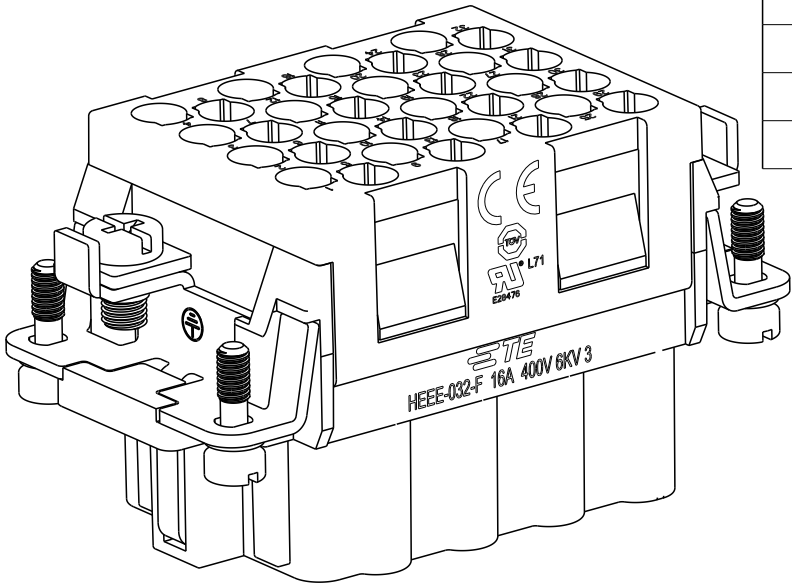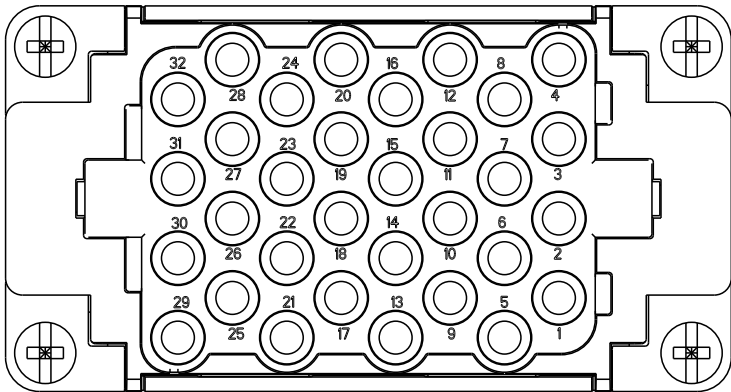

SCALE 3:2

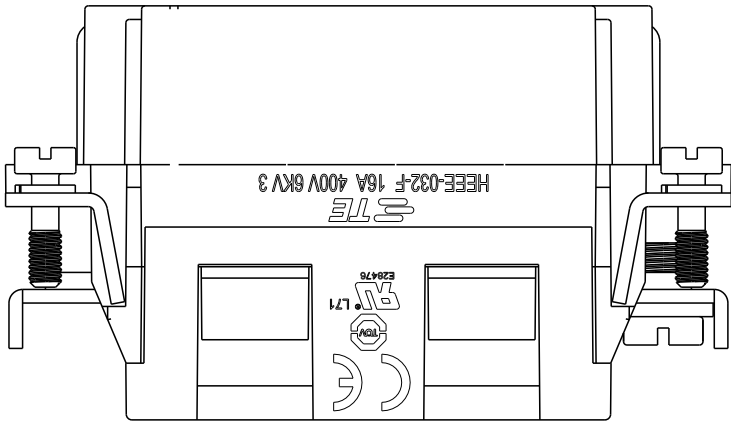


SCALE 3:2

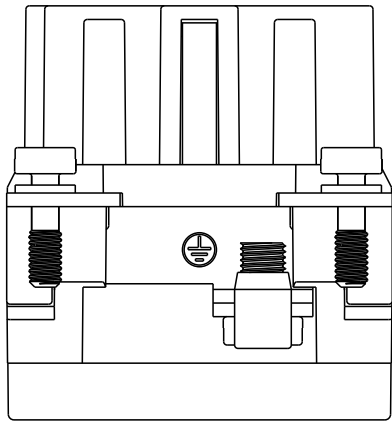


TYPE 2,T2050323201-001
类型 2,T2050323201-001



NOTES:
LASER PRINT MARKINGS SEE THIS SHEET,
OTHER SPEC REFER TO TYPE 1.

注释:
激光打标参照此页,其余产品规范参照类型 1.


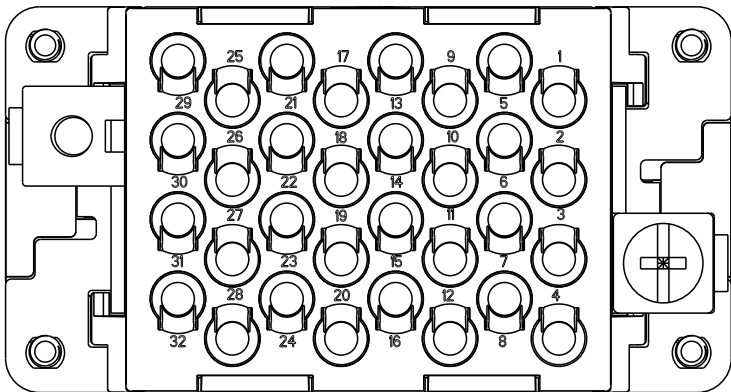


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAGHAVENDRA H M 18DEC2014	 TE Connectivity							
		CHK CHRIS WANG 18DEC2014								
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD XU XIANG 18DEC2014	NAME HEEE-032-F							
	0 PLC ±-	PRODUCT SPEC	SIZE A300779				CAGE CODE G-T2050323201000		DRAWING NO RESTRICTED TO -	
	1 PLC ±-	108-137068								
	2 PLC ±-									
3 PLC ±-	APPLICATION SPEC									
4 PLC ±-	114-137068									
ANGLES ±-										
MATERIAL -	FINISH -	WEIGHT -								
-	-									
Customer Drawing			SCALE 1:1		SHEET 2 OF 3		REV D			

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

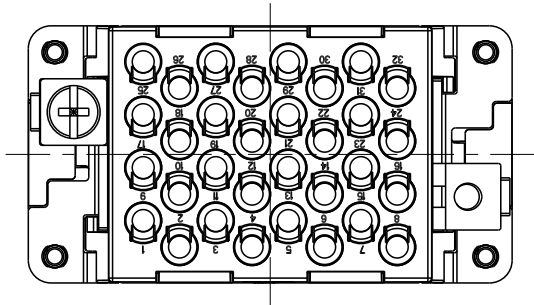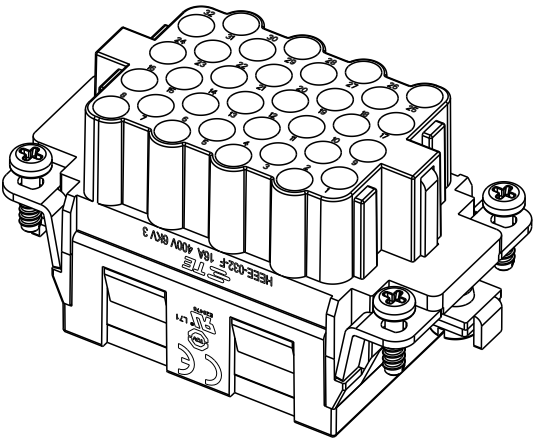


TYPE 3,T2050323201-002
类型 3,T2050323201-002

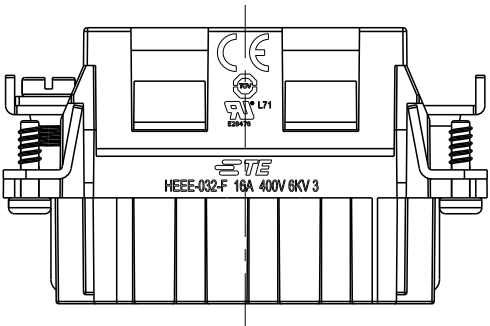


NOTES:
4X M3 SELF-TAPPING SCREW SEE THIS SHEET,
OTHER SPEC REFER TO TYPE 1.

注释:
4X M3 自攻螺丝参照此页,其余产品规范参照类型 1.

4X M3 SELF-TAPPING SCREW, RECOMMENDED
TIGHTENING TORQUE 1.2~1.5N.m
4X M3 自攻螺丝,推荐拧紧力矩 1.2~1.5N.m

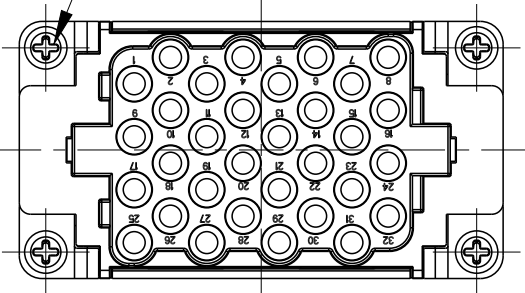

T2050323201-002	HEEE-032-F	HEEE-032 FEMALE INSERT,SELF-TAPPING HEEE-032母插,自攻螺丝	TYPE-3 类型-3
T2050323201-001	HEEE-032-F	HEEE-032 FEMALE INSERT WITH STAINLESS STEEL SCREW HEEE-032母插,带不锈钢螺丝	TYPE-2 类型-2
T2050323201-000	HEEE-032-F	HEEE-032 FEMALE INSERT HEEE-032母插	TYPE-1 类型-1
PART NUMBER 料号	PART DESCRIPTION 描述		TYPE 类型

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 18DEC2014 RAGHAVENDRA H M	 TE Connectivity		
		CHK 18DEC2014 CHRIS WANG			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD 18DEC2014 XU XIANG	NAME HEEE-032-F		
		PRODUCT SPEC 108-137068			
	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH	APPLICATION SPEC 114-137068	SIZE CAGE CODE DRAWING NO RESTRICTED TO A300779C-T2050323201000 -		
		WEIGHT -			
MATERIAL -	FINISH -	Customer Drawing		SCALE 1:1	SHEET 3 OF 3 REV D